

#### west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax Earl Ray Tomblin, Governor Randy C. Huffman, Cabinet Secretary www.dep.wv.gov

November 19, 2013

#### WELL WORK PERMIT

#### Horizontal 6A Well

This permit, API Well Number: 47-103306, issued to CNX GAS COMPANY LLC , is evidence of permission granted to perform the specified well work at the location described on the attached pages and located on the attached plat, subject to the provisions of Chapter 22 of the West Virginia Code of 1931, as amended, and all rules and regulations promulgated thereunder, and to all conditions and provisions outlined in the pages attached hereto. Notification shall be given by the operator to the Oil and Gas Inspector at least 24 hours prior to the construction of roads, locations, and/or pits for any permitted work. In addition, the well operator shall notify the same inspector 24 hours before any actual well work is commenced and prior to running and cementing casing. Spills or emergency discharges must be promptly reported by the operator to 1-800-642-3074 and to the Oil and Gas inspector.

Please be advised that form WR-35, Well Operators Report of Well Work is to be submitted to this office within 90 days completion of permitted well work, as should form WR-34 Discharge Monitoring Report within 30 days of discharge of pits, if applicable. Failure to abide by all statutory and regulatory provisions governing all duties and operations hereunder may result in suspension or revocation of this permit and, in addition, may result in civil and/or criminal penalties being imposed upon the operators.

In addition to the applicable requirements of this permit, and the statutes and rules governing oil and gas activity in WV, this permit may contain specific conditions which must be followed. Permit conditions are attached to this cover letter.

Per 35CSR-4-5.2.g this permit will expire in two (2) years from the issue date unless permitted well work is commenced. If there are any questions, please feel free to contact me at (304) 926-0499 ext. 1654.

James Martin

Chief

Operator's Well No: PHL3BHS

Farm Name: PHILIPPI DEVELOPMENT, INC

API Well Number: 47-103306

Permit Type: Horizontal 6A Well

Date Issued: 11/19/2013

#### PERMIT CONDITIONS

West Virginia Code § 22-6A-8(d) allows the Office of Oil and Gas to place specific conditions upon this permit. Permit conditions have the same effect as law. Failure to adhere to the specified permit conditions may result in enforcement action.

#### **CONDITIONS**

- 1. If the operator encounters an unanticipated void, or an anticipated void at an unanticipated depth, the operator shall notify the inspector within 24 hours. Modifications to the casing program may be necessary to comply with W. Va. Code § 22-6A-5a (12), which requires drilling to a minimum depth of thirty feet below the bottom of the void, and installing a minimum of twenty (20) feet of casing. Under no circumstance should the operator drill more than fifty (50) feet below the bottom of the void or install less than twenty (20) feet of casing below the bottom of the void.
- 2. When compacting fills, each lift before compaction shall not be more than 12 inches in height, and the fill material shall be within plus or minus 2% (unless soil test results show a greater range of moisture content is appropriate and 95% compaction can still be achieved) of the optimum moisture content as determined by the standard proctor density test, ASTM D698, Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort. Each lift must meet 95 % compaction of the optimum density based on results from the standard proctor density test of the actual soils used in specific engineered fill sites. Each lift shall be tested for compaction, with a minimum of two tests per lift per acre of fill. All test results shall be maintained on site and available for review.
- 3. Operator shall install signage per § 22-6A-8g (6) (B) at all source water locations included in their approved water management plan within 24 hours of water management plan activation.
- 4. Oil and gas water supply wells will be registered with the Office of Oil and Gas and all such wells will be constructed and plugged in accordance with the standards of the Bureau for Public Health set forth in its Legislative rule entitled *Water Well Regulations*, 64 C.S.R. 19. Operator is to contact the Bureau of Public Health regarding permit requirements. In lieu of plugging, the operator may transfer the well to the surface owner upon agreement of the parties. All drinking water wells within fifteen hundred feet of the water supply well shall be flow tested by the operator upon request of the drinking well owner prior to operating the water supply well.
- 5. Pursuant to the requirements pertaining to the sampling of domestic water supply wells/springs the operator shall, no later than thirty (30) days after receipt of analytical data provide a written copy to the Chief and any of the users who may have requested such analyses.
- 6. If any explosion or other accident causing loss of life or serious personal injury occurs in or about a well or well work on a well, the well operator or its contractor shall give notice, stating the particulars of the explosion or accident, to the oil and gas inspector and the Chief, within 24 hours of said accident.
- 7. During the casing and cementing process, in the event cement does not return to the surface, the oil and gas inspector shall be notified within 24 hours.

# STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS WELL WORK PERMIT APPLICATION.

			001	06	545
1) Well Operator:	CNX Gas Company LLC	494458046	Barbour	Pleasant	Philippi
******************************		Operator ID	County	District	Quadrangle
2) Operator's Well N	Number: PHL3BHS	V	Vell Pad Nar	ne: PHL3HS	
3 Elevation, current	ground: 1444'	Elevation, proposed p	post-constru	ction:	1445'
4) Well Type: (a) Ga	as Oil	■ Underground	d Storage		
(b) If	Horizontal	Deep		•	
5) Existing Pad? Yes	s or No: NO				
레네팅 하는 사람들이 가지?	Formation(s), Depth(s), Anticipath - 7545', Thickness - 90', Pressure - 3000#	pated Thicknesses and	d Associated	l Pressure(s):	
7) Proposed Total Ve	ertical Depth: 7735				
8) Formation at Total	l Vertical Depth: Huntersville	Chert			
9) Proposed Total Mo	easured Depth: 17,920				
10) Approximate Fre	esh Water Strata Depths:	328', 544', 665'			
11) Method to Deterr	mine Fresh Water Depth:	Reference Offset Wells			
12) Approximate Sal	twater Depths: None Report	ed			
13) Approximate Coa	al Seam Depths: 544', 665'				
14) Approximate Dep	pth to Possible Void (coal mir	ne, karst, other):	None Anti	cipated	
	vell location contain coal seam tive mine? If so, indicate name		Yes, S	Sentinel Min	e 544' & 665'
<ol><li>16) Describe propose</li></ol>		ew horizontal Marcellus well. Well to be	ZALIA UPA STALIC	2014 - 0014 - 24 80 90	
	intersville Chert. Well will be plugged back to an appro				
nated a real content.	ss A type cement. If an unexpected void is encountered	1.0	of 30' past void and co	ement to surface with appr	roved Class A type cement.
	ng/stimulating methods in det			desire Clalauster	
	ple stages divided over the lateral length of the ing sand, water, and chemicals.	well. Stage spacing is dependen	v upod engineering	design. Slickwater in	acturing technique will
	. SAN 1981 S. S. S. S. S. S.	MAY 21	2013		
18) Total area to be d	listurbed, including roads, stoo	ckpile area, pits, etc, (	(acres):	25.6 Acres	
19) Area to be disturb	bed for well pad only, less acc	ess road (acres): Oil at	nd Gas ental Protection	es	

WW - 6B (3/13)

20)

# 103306 CASING AND TUBING PROGRAM CASING AND TUBING PROGRAM CASING AND TUBING PROGRAM

ТҮРЕ	Size	New or Used	Grade	Weight per ft.	FOOTAGE: For Drilling	INTERVALS: Left in Well	CEMENT: Fill -up (Cu. Ft.)
Conductor	20"	Z	J-55	94#	80'	80'	Grout to Surface
Fresh Water	13 3/8"	Ν	J-55	54.5#	750'	750'	CTS w/ Approved Class A Type Cement
Coal							
Intermediate	9 5/8"	N	J-55	36#	2300'	2300'	CTS w/ Approved Class A Type Cement
Production	5 1/2"	Z	P-110	20#	17920'	17920'	2400 cu. ft. W/ 50/50 POZ Lead & Class A Tail
Tubing	2 3/8"	N	J-55	4.7#	8135'	8135'	
Liners							

TYPE	Size	Wellbore Diameter	Wall Thickness	Burst Pressure	Cement Type	Cement Yield
Conductor	20"	26"	0.438	2110	Class A Type	1.18
Fresh Water	13 3/8"	17 1/2"	0.380	2730	Class A Type	1.39
Coal						
Intermediate	9 5/8"	12 3/8"	0.352	3520	Class A Type	1.18
Production	5 1/2"	8 3/4" & 8 1/2"	0.361	12640	Class A Type	1.26
Tubing	2 3/8"	5 1/2" csg	0.190	7700		
Liners						

#### **PACKERS**

Kind:	None	
Sizes:	None	HOCEIVED
Depths Set:	None	MAY 2 1 2013

21) Describe centralizer placement for each casing string.	Conductor - No centralizers used. Fresh Water &
Coal - Bow spring centralizers on first joint then every fourth jo	pint to 100 feet from surface. Intermediate - Bow spring
centralizers one on the first two joints and every fourth joint ur	til inside Surface casing. Production - Rigid bow spring
centralizer on first joint then every 2 joints (free floating) throu	gh the lateral and the curve.
(Note: cementing the 5 1/2" casing completely in open hole la	teral and curve.)
22) Describe all cement additives associated with each ceme	nt type. Conductor - 2% CaCl2.
Fresh Water/Coal - 2% CaCl2. Intermediate - 2% CaCl2. Prod	uction: 2.6% Cement extender, 0.7% Fluid Loss Addative
0.5% High Temperature Retarder, 0.2% Friction Reducer.	
23) Proposed borehole conditioning procedures. condu	ctor - The hole is augered/drilled w/ air and casing ran in air. Apart From
insuring the hole is clean via air circulation at TD there are no other c	onditioning procedures. Fresh Water/Coal - The hole is drilled
w/ air and casing is ran in air. Once casing is on bottom the casing sl	noe will be cleared with fresh water and gel prior to cementing.
Intermediate - The hole is drilled w/ air and casing is ran in air. Once	casing is on bottom the casing shoe will be cleared with fresh
water and gel prior to cementing. (Note: Drilling soap may be utilized if	the hole gets wet/damp during the drilling of all air holes with the
exception of the Conductor). Production - The hole is drilled with syr	thetic oil base mud and once at TD the hole is circulated at a
drilling pump rate until the hole is clean. Once casing is ran the hole is c	irculated for a min. of one hole volume prior to pumping cement.


\*Note: Attach additional sheets as needed.

Received

MAY 2 1 2013

#### **Cement Additives**

- Conductor 2% CaCl2
- Freshwater/Coal 2% CaCl2
- Intermediate 2% CaCl2
- Production
  - o 2.6% Cement extender
  - o 0.7% Fluid Loss Additive
  - o 0.5% High Temperature Retarder
  - o 0.2% Friction Reducer



MAY 2 1 2013

W	W-9
(3)	(13)

	Page	of
API Number 47 - 001	= 4	
Operator's Well	No. PHL3BHS	S

# STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION OFFICE OF OIL AND GAS

#### FLUIDS/ CUTTINGS DISPOSAL & RECLAMATION PLAN

	ny LLC	OP Code 494458046
Watershed (HUC 10) Foxgrape	Run Qu	adrangle Philippi
Elevation 1,444.50	County_Barbour	District Pleasant
Do you anticipate using more tha	n 5,000 bbls of water to complete the p	proposed well work? Yes No _x
Will a pit be used for drill cutting	gs? Yes No x	
If so, please describe and	ticipated pit waste: N/A	
Will a synthetic liner be	used in the pit? Yes No _x	If so, what ml.? N/A
Proposed Disposal Meth	nod For Treated Pit Wastes:	
		r
Off Sit	te Disposal (Supply form WW-9 for di (Explain_Recycle on other wells on the s	
Will closed loop system be used?	Yes	
Drilling medium anticipated for t	his well? Air, freshwater, oil based, et	
	Synthetic, petroleum, etc. Synthetic	
	nedium? Bactericide, Polymers and Weightin	
Drill cuttings disposal method? 1	Leave in pit, landfill, removed offsite, e	etc. Landfill
	solidify what medium will be used? (a	
		rn Landfill, Max Environmental Yukon Landfill and Bulger Landfill
on August 1, 2005, by the Office provisions of the permit are enfo law or regulation can lead to enfo I certify under penalty application form and all attachrobtaining the information, I beli	of Oil and Gas of the West Virginia Dorceable by law. Violations of any terporcement action. of law that I have personally examinments thereto and that, based on my leve that the information is true, accommation, including the possibility of firmation, including the possibility.	lable of the Received
Company Official (Typed Name)	d Agent - General Manager WV Gas Oper	rations
Company Official (Typed Name) Company Official Title Designer		HAV 9:1 Set
Company Official (Typed Name)		, 20 13  Notary Public 15 1 37 Part of NOTARY P

Form	W	W	-9
------	---	---	----

**CNX Gas Company LLC** 

Proposed Revegetation Treatment: Acres Disturbed 25.6

l Revegetation Treatme	ent: Acres Disturbed 25	5.6 Prevegetation ph	<sub>1</sub> 6.5
according to pH te	st Tons/acre or to correc		
Fertilizer (10-20-20 or		lbs/acre (500 lbs minimum)	
<sub>Mulch</sub> hay or str	aw @ two	_Tons/acre	
		Seed Mixtures	
Area	I	Are	ea II
Seed Type	lbs/acre	Seed Type	lbs/acre
ard Grass	25	Orchard Grass	25
foot Trefoil	15	Birdsfoot Trefoil	15
ino Clover	10	Landino Clover	10

Mulch hay or stra	w @ two	Tons/acr	e		
		Seed I	Mixtures		
Area I				Area II	
Seed Type	lbs/acre		Seed Type		lbs/acre
Orchard Grass	25		Orchard Grass		25
Birdsfoot Trefoil	15		Birdsfoot Trefoil		15
Landino Clover	10		Landino Clover		10
Plan Approved by:  Comments:		heet.	ation.		
Title: [NSperton			S-3-/	3	
Field Pavioused?	/ ) Vas		Heceivec		

MAY 2 1 2013

## west virginia department of environmental protection



# Water Management Plan: Primary Water Sources



WMP-01309

API/ID Number:

047-001-03306

Operator:

Consol Energy - WV

PHL3BHS

#### Important:

For each proposed primary water source (including source intakes for purchased water sources) identified in your water management plan, and summarized herein, DEP has made an evaluation concerning water availability over the specified date range. DEP's assessment is based on the following considerations:

- Statistical analysis of historical USGS stream gauge data (transferred to un-gauged locations as necessary);
- •Identification of sensitive aquatic life (endangered species, mussels, etc.);
- Quantification of known existing demands on the water supply (Large Quantity Users);
- •Minimum flows required by the Army Corps of Engineers; and
- Designated stream uses.

Based on these factors, DEP has provided, for each intake location (and origination point for purchased water), a reference gauge location and discharge flow reading which must be surpassed prior to withdrawals. Additionally, DEP has established a minimum passby flow at the withdrawal location which must also be surpassed prior to withdrawals. These thresholds are considered terms of the permit and are enforceable as such.

DEP is aware that some intake points will be used for mutiple wells and well sites. In these cases, the thresholds set by the Water Management Plan are to be interepreted as total withdrawal limits for each location over the specified date range regardless of how many wells are supported by that intake.

For all purchased water intakes, determinations of water availability are made at the original source intake location. It is the responsibility of the Oil and Gas Operator, not the seller, to cease withdrawal of water from the seller when flows are less than the minimum gauge reading at the stream gauge referenced by the Water Management Plan in order to protect stream uses.

Note that the determinations made herein are based on the best available data, but it is impossible to predict water availability in the future. While the DEP has carefully established these minimum withdrawal thresholds, it remains the operator's responsibility to protect aquatic life at all times. Approval to withdrawal is contingent upon permission from the land owner. It is the responsibility of the operator to secure and maintain permission prior to any withdrawals.

The operator is reminded that 24-48 hours prior to withdrawing (or purchasing) water, DEP must be notified by email at DEP.water.use@wv.gov.

APPROVED JUN 3 0 2013

#### Source Summary

WMP-01309

API Number:

047-001-03306

Operator:

Consol Energy - WV

PHL3BHS

Stream/River

Source

**Tygart Valley River** 

Barbour

Owner:

**Consol Energy** 

Start Date 4/1/2014

**End Date** 4/1/2015

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

11,000,000

39.190421

-80.017423

Regulated Stream?

Ref. Gauge ID:

3054500

TYGART VALLEY RIVER AT PHILIPPI, WV

Max. Pump rate (gpm):

1,470

Min. Gauge Reading (cfs):

355.01

Min. Passby (cfs)


344.41

**DEP Comments:** 

#### Source Detail

WMP-01309	API/ID Number:	047-001-03306	6 Operator:	Consol Energy - V	VV
	PH	L3BHS			
Source ID: 20124 Source Name	Tygart Valley River		Source La	atitude: 39.190421	
	Consol Energy		Source Lor	ngitude: -80.017423	
HUC-8 Code: 5020 Drainage Area (sq. mi.):	931.43 County:	3arbour	Anticipated withdrawal s Anticipated withdrawal		2014 2015
	ssel Stream? r 3?		Total Volume from Sou	urce (gal): 11,00	00,000
Regulated Stream?			Max. Pump ra	ate (gpm): 1,4	170
✓ Proximate PSD? Taylor	County PSD		M	ax. Simultaneous Trucks:	0
✓ Gauged Stream?			Max	k. Truck pump rate (gpm)	

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)	
1	1,901.06	361.51	1,542.64	
2	2,155.51	361.51	1,797.09	
3	2,600.93	361.51	2,242.51	
4	2,132.23	361.51	1,773.82	
5	1,375.48	361.51	1,017.07	
6	586.10	361.51	227.69	
7	402.01	361.51	43.59	
8	280.57	361.51	-77.84	
9	177.42	361.51	-181.00	
10	286.75	361.51	-71.66	
11	950.89	361.51	592.48	
12	1,738.34	361.51	1,379.92	

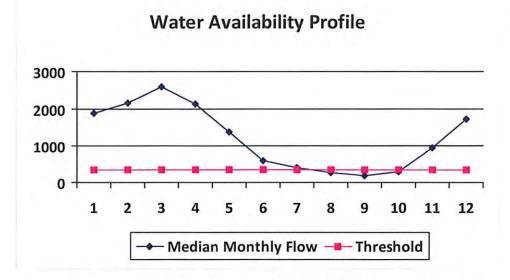

Min. Gauge Reading (cfs):  Passby at Location (cfs):	355.01 347.50
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	0.00
Pump rate (cfs):	3.28
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	10.73
Base Threshold (cfs):	347.50

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

### west virginia department of environmental protection



# Water Management Plan: Secondary Water Sources



WMP-01309

API/ID Number

047-001-03306

Operator:

Consol Energy - WV

PHL3BHS

#### Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

#### Lake/Reservior

Source ID: 20125 Source Name Little Hackers Creek Impoundment (WV83489)

Source start date:

4/1/2014

Source end date:

4/1/2015

Source Lat:

39.1889

Source Long:

-80.0653

County

Barbour

Max. Daily Purchase (gal)

Total Volume from Source (gal):

11,000,000

**DEP Comments:** 

Little Hackers Creek Impoundment (WV83489) used by Wolf Run Mining Company -

Sentinel Mine

WMP-01309 API/ID Number 047-001-03306 Operator: Consol Energy - WV

PHL3BHS

#### Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

#### Multi-site impoundment

Source ID: 20126 Source Name Warder North Impoundment Source start date: 4/1/2014

Source end date: 4/1/2015

Source Lat: 39.192505 Source Long: -80.025198 County Barbour

Max. Daily Purchase (gal)

Total Volume from Source (gal): 11,000,000

**DEP Comments:** 

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-189

Source ID: 20127 Source Name Warder South Impoundment Source start date: 4/1/2014
Source end date: 4/1/2015

Source Lat: 39.19097 Source Long: -80.025198 County Barbour

Max. Daily Purchase (gal)

Total Volume from Source (gal): 11,000,000

**DEP Comments:** 

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-190

WMP-01309 API/ID Number 047-001-03306 Operator: Consol Energy - WV

PHL3BHS

#### Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 20128 Source Name Alton 1 Freshwater Impoundment Source start date: 4/1/2014

Source end date: 4/1/2015

Source Lat: 38.794961 Source Long: -80.184542 County Upshur

Max. Daily Purchase (gal)

Total Volume from Source (gal): 11,000,000

**DEP Comments:** 

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-194

Source ID: 20129 Source Name Alton 2 Freshwater Impoundment Source start date:

Source start date: 4/1/2014 Source end date: 4/1/2015

Source Lat: 38.806146 Source Long: -80.195108 County Upshur

Max. Daily Purchase (gal)

Total Volume from Source (gal): 11,000,000

**DEP Comments:** 

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-195

WMP-01309

API/ID Number

047-001-03306

Operator:

Consol Energy - WV

#### PHL3BHS

#### Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

#### **Recycled Frac Water**

Source ID: 20130 Source Name

**ALT 1 Flowback Pit** 

Source start date:

4/1/2014

Source end date:

4/1/2015

Source Lat:

38.793967

Source Long:

80.183196

County

Barbour

Max. Daily Purchase (gal)

Total Volume from Source (gal):

11,000,000

**DEP Comments:** 

Source ID: 20131 Source Name

PHL 1 Flowback Pit

Source start date:

4/1/2014

Source end date:

4/1/2015

Source Lat:

39.192372

Source Long:

-80.018833

County

Barbour

Max. Daily Purchase (gal)

Total Volume from Source (gal):

11,000,000

**DEP Comments:** 

WMP-01309 API/ID Number 047-001-03306 Operator: Consol Energy - WV

PHL3BHS

#### Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 20132 Source Name PHL1; PHL13; PHL29; PHL4; ALT2; ALT7

Source start date: 4/1/2014

Source end date: 4/1/2015

Source Lat: Source Long: County

Max. Daily Purchase (gal)

Total Volume from Source (gal): 11,000,000

**DEP Comments:** 

plat spotted



# Received

MAY 2 1 2013

Office of Oil and Gas
WV Dept. of Environmental Protection

LAND SURVEYING SERVICES 21 CEDAR LANE BRIDGEPORT, WV 26330 PHONE: 304-842-2018 OR 5762

	CNX GAS CO	MPANY LLC			
	P. O. BO	X 1248			
	JANE LEW,	WV 26378			
WATERSHED:	FOXGRAPE RUN				
DISTRICT:	PLEASANT	COUNTY: _	BARBOUR		
QUADRANGLE	PHILIPPI	— WELLN	O.: PHL3BHS		

03/28/13

DATE: .

PAGE 1/22/201

DRAWINGS TO ACCOMPANY FORM WW-9

