

west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax Earl Ray Tomblin, Governor Randy C. Huffman, Cabinet Secretary www.dep.wv.gov

July 02, 2013

WELL WORK PERMIT Horizontal 6A Well

This permit, API Well Number: 47-1706249, issued to EQT PRODUCTION COMPANY, is evidence of permission granted to perform the specified well work at the location described on the attached pages and located on the attached plat, subject to the provisions of Chapter 22 of the West Virginia Code of 1931, as amended, and all rules and regulations promulgated thereunder, and to all conditions and provisions outlined in the pages attached hereto. Notification shall be given by the operator to the Oil and Gas Inspector at least 24 hours prior to the construction of roads, locations, and/or pits for any permitted work. In addition, the well operator shall notify the same inspector 24 hours before any actual well work is commenced and prior to running and cementing casing. Spills or emergency discharges must be promptly reported by the operator to 1-800-642-3074 and to the Oil and Gas inspector.

Please be advised that form WR-35, Well Operators Report of Well Work is to be submitted to this office within 90 days completion of permitted well work, as should form WR-34 Discharge Monitoring Report within 30 days of discharge of pits, if applicable. Failure to abide by all statutory and regulatory provisions governing all duties and operations hereunder may result in suspension or revocation of this permit and, in addition, may result in civil and/or criminal penalties being imposed upon the operators.

In addition to the applicable requirements of this permit, and the statutes and rules governing oil and gas activity in WV, this permit may contain specific conditions which must be followed. Permit conditions are attached to this cover letter.

Per 35CSR-4-5.2.g this permit will expire in two (2) years from the issue date unless permitted well work is commenced. If there are any questions, please feel free to contact me at (304) 926-0499 ext. 1654.

James Martin

Chief

Operator's Well No: 514317

Farm Name: JORDAN FAMILY PARTNERSHIP

API Well Number: 47-1706249

Permit Type: Horizontal 6A Well

Date Issued: 07/02/2013



PERMIT CONDITIONS

West Virginia Code § 22-6A-8(d) allows the Office of Oil and Gas to place specific conditions upon this permit. Permit conditions have the same effect as law. <u>Failure to adhere to the specified permit conditions may result in enforcement action.</u>

CONDITIONS

- 1. The subject application contains information which indicates that the proposed activity may require permit coverage from the United States Army Corps of Engineers (USACOE). Through this permit, you are hereby being advised to consult with USACOE regarding this proposed activity.
- 2. If the operator encounters an unanticipated void, or an anticipated void at an unanticipated depth, the operator shall notify the inspector within 24 hours. Modifications to the casing program may be necessary to comply with W. Va. Code § 22-6A-5a (12), which requires drilling to a minimum depth of thirty feet below the bottom of the void, and installing a minimum of twenty (20) feet of casing. Under no circumstance should the operator drill more than fifty (50) feet below the bottom of the void or install less than twenty (20) feet of casing below the bottom of the void.
- 3. When compacting fills, each lift before compaction shall not be more than 12 inches in height, and the fill material shall be within plus or minus 2% of the optimum moisture content as determined by the standard proctor density test, ASTM D698, Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort. Each lift must meet 95 % compaction of the optimum density based on results from the standard proctor density test of the actual soils used in specific engineered fill sites. Each lift shall be tested for compaction, with a minimum of two tests per lift per acre of fill. All test results shall be maintained on site and available for review.
- 4. Operator shall install signage per § 22-6A-8g (6) (B) at all source water locations included in their approved water management plan within 24 hours of water management plan activation.
- 5. Oil and gas water supply wells will be registered with the Office of Oil and Gas and all such wells will be constructed and plugged in accordance with the standards of the Bureau for Public Health set forth in its Legislative rule entitled *Water Well Regulations*, 64 C.S.R. 19. Operator is to contact the Bureau of Public Health regarding permit requirements. In lieu of plugging, the operator may transfer the well to the surface owner upon agreement of the parties. All drinking water wells within fifteen hundred feet of the water supply well shall be flow tested by the operator upon request of the drinking well owner prior to operating the water supply well.
- 6. Pursuant to the requirements pertaining to the sampling of domestic water supply wells/springs the operator shall, no later than thirty (30) days after receipt of analytical data provide a written copy to the Chief and any of the users who may have requested such analyses.

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS W.VA. CODE \$22-6A - WELL WORK PERMIT APPLICATION

1) Well Operator: EQ	T Production Company			017	3	286
_			Operator ID	County	District	Quadrangle
2) Operator's Well Num	ber:	514317		_Well Pad Nan	ne	CPT11
3 Elevation, current grou	und:1,130.0	Eleva	ation, proposed p	ost-construction	: 1,111.	0
4) Well Type: (a) Gas	Oil					
Other						
(b) If G	as: Shallow		Deep			
	Horizontal	•				
5) Existing Pad? Yes or	No: No					
6) Proposed Target For						
Target formation	is Marcellus at a depth of 697	79' with the ant	icipated thickness to	be 46' feet and anti-	cipated target press	sure of 4691 PSI
7) Proposed Total Vertic	cal Depth:			6,979		
B) Formation at Total Ve				Marcellus		
9) Proposed Total Meas				15,747		
10) Approximate Fresh			6	6,337,386, 406,	616, 704	
11) Method to Determin		By offset v	vells			
12) Approximate Saltwa				1661 & 1389		
13) Approximate Coal S				852 & 1264		
	to Possible Void (coal m	ine, karst, c	other):		one Reported	
	oal seams tributary or ac				None Reported	1
16) Describe proposed			new horizontal well in	the Marcellus forma	ation. The vertical of	frill to go down to
경기에 가 의용에 내 이번 시간에 많은 학생수	23' and kick off the horizonta	I leg into the m	arcellus using a slic	water frac.		
	7.				4	
경기를 가는 계속이 다른 사는 기를 하는 것이다. 그렇게 되는 그렇게 다	stimulating methods in d					
	ted in accordance with state re					
	er is mixed with sand and a sn					
	ction reducer, biocide, and sca					
400,000 gallons of water per s	stage. Sand sizes vary from 1	00 mesh to 20	/40 mesh. Average	approximately 400,0	00 pounds of sand	per stage.
18) Total area to be dist	urbed, including roads, s	stockpile are	ea, pits, etc, (acre	es):	43.8	32
19) Area to be disturbed	for well pad only, less a	access road	(acres):		15.68	

RECEIVED
Office of Oil and Gas

JUN 27 2013

WV Department of Environmental Protection

CASING AND TUBING PROGRAM

TYPE	Cizo	New	Grade	Weight per	FOOTAGE:	INTERVALS:	CEMENT:
ITFE	<u>Size</u>	or Used	Glade	ft.	for Drilling	Left in Well	Fill- up (Cu.Ft.)
Conductor	20	New	MC-50	81	40	40	38 C.T.S.
Fresh Water	13 3/8	New	MC-50	54	804	804	705 C.T.S.
Coal	-	New	1-19-2		-	•	
Intermediate	9 5/8	New	MC-50	40	5,242	5,242	2066 C.T.S.
Production	5 1/2	New	P-110	20	15,747	15,747	See Note 1
Tubing	2 3/8		J-55	4.6			will be set 100' less than TD
Liners							1

LKC

TYPE	Size	Wellbore Diameter	Wall_ Thickness	Burst Pressure	Cement Type	Cement Yield
Conductor	20	24	0.635		Construction	1.18
Fresh Water	13 3/8	17 1/2	0.38	2,480	1	1.21
Coal	-		•	÷		
Intermediate	9 5/8	12 3/8	0.395	3,590	1	1.21
Production	5 1/2	8 1/2	0.361	12,640		1.27/1.86
Tubing						
Liners						

Packers

Kind:	N/A	
Sizes:	N/A	
Depths Set:	N/A	

Note 1: EQT plans to bring the TOC on the production casing cement job 1,000' above kick off point, which is at least 500' above the shallowest production zone, to avoid communication.

RECEIVED
Office of Oil and Gas

07/05/2013

JUN 27 2013

WV Department of Environmental Protection 21) Describe centralizer placement for each casing string. Surface: Bow spring centralizers – One at the shoe and one spaced every 500'. Intermediate: Bow spring centralizers— One cent at the shoe and one spaced every 500'. Production: One spaced every 1000' from KOP to Int csg shoe Surface (Type 1 Cement): 0-3% Calcium Chloride 22) Describe all cement additives associated with each cement type. Jsed to speed the setting of cement slurries. 0.4% flake. Loss Circulation Material (LCM) is used to combat the loss of the cement slurry to a thief zone. Intermediate (Type 1 Cement): 0-3% Calcium Chloride. Salt is used in shallow, low temperature formations to speed the setting of cement slurries. 0.4% flake. Loss Circulation Material (LCM) is used to combat the loss of whole drilling fluid or cement slurry (not filtrate) to a thief zone. Production: Lead (Type 1 Cement): 0.2-0.7% Lignosulfonate (Retarder). Lengthens thickening time. 0.3% CFR (dispersant). Makes cement easier to mix. Tail (Type H Cement): 0.25-0.40% Lignosulfonate (Retarder). Lengthens thickening time. RECEIVED 0.2-0.3% CFR (dispersant). This is to make the cement easier to mix. Office of Oil and Gas 60 % Calcuim Carbonate. Acid solubility. APR 26 2013 0.4-0.6% Halad (fluid loss). Reduces amount of water lost to formation. WV Department of **Environmental Protection** 23) Proposed borehole conditioning procedures. <u>Surface</u>: Circulate hole clean (Approximately 30-45 minutes) rotating & reciprocating one full joint until cuttings diminish at surface. When cuttings returning to surface diminish, continue to circulate an additional 5 minutes. To ensure that there is no fill, short trip two stands with no circulation. If there is fill, bring compressors back on and circulate hole clean. A constant rate of higher than expected cuttings volume likely indicates washouts that will not clean up. Intermediate: Circulate hole clean (Approximately 30-45 minutes) rotating & reciprocating one full joint until cuttings diminish at surface. When cuttings returning to surface diminish, continue to circulate an additional 5 minutes. If foam drilling, to enhance


*Note: Attach additional sheets as needed.

the shakers every 15 minutes.

hole cleaning use a soap sweep or increase injection rate & foam concentration.

Production: Pump marker sweep with nut plug to determine actual hole washout. Calculate a gauge holes bottoms up volume.


Perform a cleanup cycle by pumping 3-5 bottoms up or until the shakers are clean. Check volume of cuttings coming across

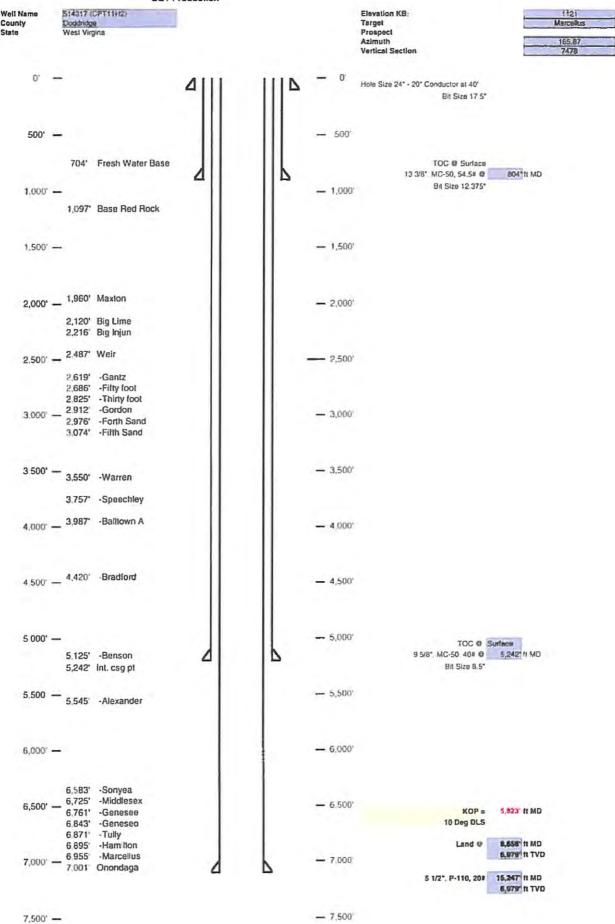

RECEIVED
Office of Oil and Gas

JUN 27 2013

WV Department of Environmental Protection

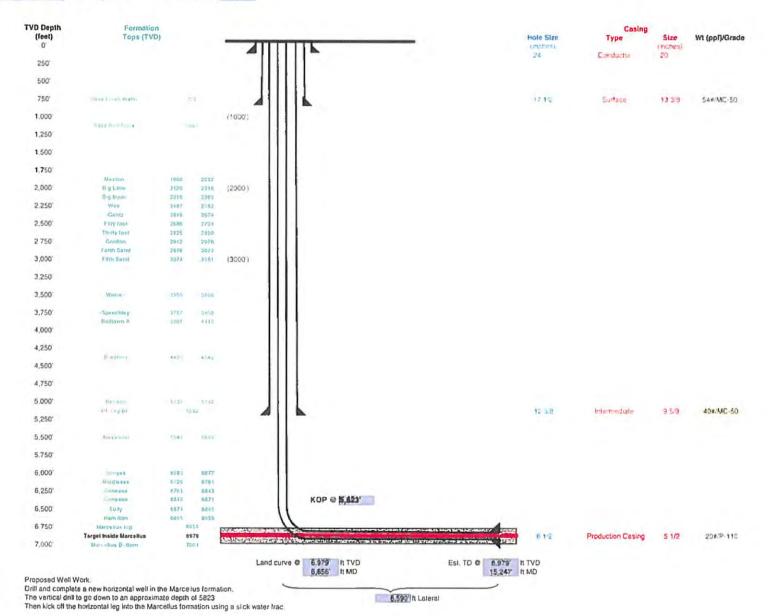

RECEIVED Office of Oil and Gas WV Depariment of Environmental Protection

2013

JUN 27

API No. 47	017	-	06249
Operator's We	II No.		514317

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS

CONSTRUCTION AND RECLAMATION PLAN AND SITE REGISTRATION APPLICATION FORM GENERAL PERMIT FOR OIL AND GAS PIT WASTE DISCHARGE

Operator Name _		CPT11	OF		
Watershed	Flint Run of McEl	roy Creek	Quadran	gleC	Center Point 7.5'
Elevation	1111.0	_County	Doddridge	District	Grant
Description of ant	icipated Pit Waste:			N/A	
Do you anticipate	using more than 5,000	bbls of wate	r to complete the prop	osed well wor	rk? Yes x No
Will a synthetic li	iner be used in the pit?	N/A	If so, what m	il.?	N/A
Proposed Dispos		cation nd Injection API Number			
	Other (Ex				
If oil bath	anticipated for this well ased, what type? Synth used? MILBAR, Viscosifer, Alkalinit system be used? YE	etic, petroleu Control, Lime, Chloride	m, etc		water based mud
	osal method? Leave in		emoved offsite, etc.		Landfill
If left in	pit and plan to solidify w	vhat medium	will be used? Cement	t, lime,	n/a
Landfill	or offsite name/permit r	number?	Se	e Attached Li	st
on August 1, 2005, by provisions of the perm or regulation can lead I certify under p application form and a the information, I belie	(Typed Name)	the West Virgin plations of any to sonally examine at, based on my e, accurate, and	ia Department of Environme erm or condition of the gene d and am familiar with the i y inquiry of those individuals I complete. I am aware that	ental Protection. eral permit and/o enformation submestimmediately rethere are signification. Roark	I understand that the or other applicable law nitted on this sponsible for obtaining
Subscribed and s	worn before me this	28	day of Mape	4	, 20 /3
My commission e	xpires	6/21/20	018		- 145-170 \$ 11 570 7



. WW-9 Rev. 1/12

> Property Boundary

API No. 47 017 0 Operator's Well No. 514317

Stream Open Ditch Rock		Wsterway		
	0830	Cross Drain ZZZZZ	<i></i>	TITIL
	•••••	Artificial Filter Strip XXXXX	000000000000000000000000000000000000000	COOKE
North	N	Pit Cut Walls	en Time	
Buildings	No. of the last of	Pit Compacted Fill Walls	Junitaring.	
Water Wells Drill Sites	(S)	Area for Land Application of Pit Waste		
roposed Revegetation	Treatment: Acres Disturbed	43.82	Prevegetation	pH <u>7.6</u>
Lime	3 Tons/acre of	or to correct to pH	6.5	
Fertilizer (10-2	20-20 or equivalent)	1/3 lbs/acre (500) lbs minimum)	
Mulch	2	Tons/acre		
		Seed Mixtures		
Ar	rea I		Area II	
Seed Type	lbs/acre	Seed Type		lbs/acre
Y-31	40	Orchard Grass		15
lsike Clover	5	Alsike Clover		5
nnual Rye	15			
	ation,pit and proposed area involved 7.5' topographic sh			
rawing(s) of road, loca		eet.		
rawing(s) of road, local hotocopied section of Plan Approved by:	involved 7.5' topographic sh	eet.	DED rego	sla Tions
rawing(s) of road, local hotocopied section of Plan Approved by: comments:	nvolved 7.5' topographic sh Davylds 1 Teau	1957all KKS To		sla Tion 5
rawing(s) of road, local hotocopied section of Plan Approved by: comments:	involved 7.5' topographic sh	1957all KKS To		slation5

Spring Wet Spot Drain Pipe

APR 26 2013

WV Department of Environmental Protection 07/05/2013

17-06249

EQT Production Water plan Offsite disposals for Marcellus wells

CWS TRUCKING INC.

P.O. Box 391 Williamstown, WV 26187 740-516-3586 Noble County/Noble Township Permit # 3390

LAD LIQUID ASSETS DISPOSAL INC.

226 Rankin Road Washington, PA 15301 724-350-2760 724-222-6080 724-229-7034 fax Ohio County/Wheeling Permit # USEPA WV 0014

TRI COUNTY WASTE WATER MANAGEMENT, INC.

1487 Toms Run Road Holbrook, PA 15341 724-627-7178 Plant 724-499-5647 Office Greene County/Waynesburg Permit # TC-1009

Waste Management - Meadowfill Landfill

Rt. 2, Box 68 Dawson Drive Bridgeport, WV 26330 304-326-6027 Permit #SWF-1032-98 Approval #100785WV

Waste Management - Northwestern Landfill

512 E. Dry Road Parkersburg, WV 26104 304-428-0602 Permit #SWF-1025 WV-0109400 Approval #100833WV

BROAD STREET ENERGY LLC

37 West Broad Street Suite 1100 Columbus, Ohio 43215 740-516-5381 Washington County/Belpre Twp. Permit # 8462

TRIAD ENERGY

P.O. Box 430 Reno, OH 45773 740-516-6021 Well 740-374-2940 Reno Office Jennifer Nobel County/Jackson Township Permit # 4037

KING EXCAVATING CO.

Advanced Waste Services 101 River Park Drive New Castle, Pa. 16101 Facility Permit# PAR000029132







Water Management Plan: Primary Water Sources



WMP-01220

API/ID Number:

047-017-06250

Operator:

EQT Production Company

514318 (CPT11H3)

Important:

For each proposed primary water source (including source intakes for purchased water sources) identified in your water management plan, and summarized herein, DEP has made an evaluation concerning water availability over the specified date range. DEP's assessment is based on the following considerations:

- Statistical analysis of historical USGS stream gauge data (transferred to un-gauged locations as necessary);
- •Identification of sensitive aquatic life (endangered species, mussels, etc.);
- •Quantification of known existing demands on the water supply (Large Quantity Users);
- Minimum flows required by the Army Corps of Engineers; and
- · Designated stream uses.

Based on these factors, DEP has provided, for each intake location (and origination point for purchased water), a reference gauge location and discharge flow reading which must be surpassed prior to withdrawals. Additionally, DEP has established a minimum passby flow at the withdrawal location which must also be surpassed prior to withdrawals. These thresholds are considered terms of the permit and are enforceable as such.

DEP is aware that some intake points will be used for mutiple wells and well sites. In these cases, the thresholds set by the Water Management Plan are to be interepreted as total withdrawal limits for each location over the specified date range regardless of how many wells are supported by that intake.

For all purchased water intakes, determinations of water availability are made at the original source intake location. It is the responsibility of the Oil and Gas Operator, not the seller, to cease withdrawal of water from the seller when flows are less than the minimum gauge reading at the stream gauge referenced by the Water Management Plan in order to protect stream uses.

Note that the determinations made herein are based on the best available data, but it is impossible to predict water availability in the future. While the DEP has carefully established these minimum withdrawal thresholds, it remains the operator's responsibility to protect aquatic life at all times. Approval to withdrawal is contingent upon permission from the land owner. It is the responsibility of the operator to secure and maintain permission prior to any withdrawals.

The operator is reminded that 24-48 hours prior to withdrawing (or purchasing) water, DEP must be notified by email at DEP.water.use@wv.gov.

APPROVED JUN 1 1 2013

Source Summary

WMP-01220 API Number: 047-017-06250 Operator: EQT Production Company

514318 (CPT11H3)

Stream/River

Max. Pump rate (gpm):

1,500

Source Ohio River at Hannibal, OH
 Owner: Richard Potts/Rich

Merryman

Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude:

6/1/2013 6/1/2014 10,200,000 39.655883 -80.86678

6.468.00

Refer to the specified station on the National Weather Service's Ohio River forecast

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam

website: http://www.erh.noaa.gov/ohrfc//flows.shtml

Min. Gauge Reading (cfs):

Source Ohio River @ Westbrook Trucking Site
 Owner: Stephen R. and Janet Sue

Westbrook

Min. Passby (cfs)

Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude:

6/1/2013 6/1/2014 10,200,000 39.384455 -81.25645

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm): 1,260 Min. Gauge Reading (cfs): 6,468.00 Min. Passby (cfs)

DEP Comments: Refer to the specified station on the National Weather Service's Ohio River forecast

website: http://www.erh.noaa.gov/ohrfc//flows.shtml

Source Ohio River @ Select Energy
 Owner: Select Energy

Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude:

6/1/2013 6/1/2014 10,200,000 39.346473 -81.338727

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999998 Ohio River Station: Racine Dam

Max. Pump rate (gpm): 1,500 Min. Gauge Reading (cfs): 7,216.00 Min. Passby (cfs)

DEP Comments: Refer to the specified station on the National Weather Service's Ohio River forecast

website: http://www.erh.noaa.gov/ohrfc//flows.shtml

0	Source	Middle Island	Creek @ Tı	ravis Truck Pad			Owner:	Michael J. Travis
	Start Date 6/1/2013	End Date 6/1/2014		Total Volume (gal) 10,200,000	Max. daily po	urchase (gal)	Intake Latitude: 39.308545	Intake Longitude: -80.781102
	☐ Regulated	Stream?		Ref. Gauge I	D: 311450	0	MIDDLE ISLAND CREEK AT	LITTLE, WV
	Max. Pump	rate (gpm):	4,200	Min. Gauge Read	ling (cfs):	72.16	Min. Passby (c	fs) 28.33
		DEP Commer	nts:					
0	Source	Middle Island (Creek @ Ro	ock Run			Owner:	William Whitehill
	Start Date 6/1/2013	End Date 6/1/2014		Total Volume (gal) 10,200,000	Max. daily pu	ırchase (gal)	Intake Latitude: 39.298763	Intake Longitude: -80.760682
	☐ Regulated	Stream?		Ref. Gauge I	D: 311450	0	MIDDLE ISLAND CREEK AT	LITTLE, WV
	Max. Pump	rate (gpm):	1,680	Min. Gauge Reac	ling (cfs):	62.89	Min. Passby (c	fs) 26.43
		DEP Commer	nts:					
8	Source	McElroy Creek	@ Wine W	Vithdrawal Site			Owner:	Elton Wine
	Start Date 6/1/2013	End Date 6/1/2014		Total Volume (gal) 10,200,000	Max. daily pu	ırchase (gal)	Intake Latitude: 39.39402	Intake Longitude: -80.70576
	☐ Regulated	Stream?		Ref. Gauge I	D: 311450	0	MIDDLE ISLAND CREEK AT	LITTLE, WV
	Max. Pump	rate (gpm):	1,260	Min. Gauge Reac	ling (cfs):	72.54	Min. Passby (c	fs) 10.66

DEP Comments:

Source Tygart River @ Kuhnes Withdrawal Site A

Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude:

6/1/2013 6/1/2014 10,200,000 39.35692 -80.05474

Owner:

Charlie & Peggy Kuhnes

Regulated Stream? Tygart Valley Dam Ref. Gauge ID: 3057000 TYGART VALLEY RIVER AT COLFAX, WV


Max. Pump rate (gpm): 1,260 Min. Gauge Reading (cfs): 404.79 Min. Passby (cfs) 392.62

DEP Comments:

WMP-01220	API/ID Number:	047-017-06250	Operator:	EQT Producti	on Compan
	514318	(CPT11H3)			
ource ID: 17840 Source Name	Ohio River at Hannibal, OH		Sourc	e Latitude: 39.6	555883
	Richard Potts/Rich Merrym	an	Source	Longitude: -80.	86678
☐ Trout Stream? ☐ Tie ✓ Regulated Stream? Ohio		Wetzel		val end date:	
Reference Gaug 99999	Ohio River Station: \	Willow Island Lock	& Dam		
Drainage Area (sq. mi.)	25,000.00		Gauge Th	hreshold (cfs):	6468

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	45,700.00		-
2	49,200.00		
3	65,700.00		
4	56,100.00	4.	
5	38,700.00		14
6	24,300.00	-	19
7	16,000.00	+	1.5
8	13,400.00	-	
9	12,800.00	÷/	- 4
10	15,500.00	-	
11	26,300.00	4	
12	41,300.00		-



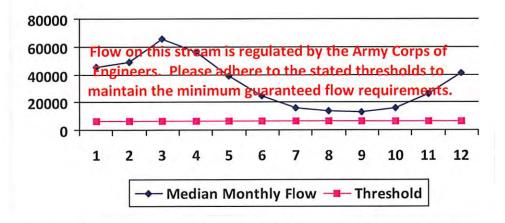

Water Availability Assessment of Location


Downstream Demand (cfs): Pump rate (cfs): Headwater Safety (cfs):	
Downstream Demand (cfs): Pump rate (cfs):	0.00
Downstream Demand (cfs):	0.00
opstream bemana (dis).	3.34
Upstream Demand (cfs):	0.00
	0.00
Base Threshold (cfs):	-

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

WMP-01220	API/ID Number:	047-017-06250	Operator:	EQT Producti	ion Compan
	514318	(CPT11H3)			
Source ID: 17841 Source Name	Ohio River @ Westbrook Tr Stephen R. and Janet Sue W			e Latitude: 39.3 Longitude: -81.	
☐ Trout Stream? ☐ Tie	2201	leasants	Anticipated withdrawa Anticipated withdraw Total Volume from	al start date: val end date:	6/1/2013 6/1/2014 10,200,00 1,260
Gauged Stream?			n	Max. Truck pump ra	te (gpm)
Reference Gaug 99999	Ohio River Station: \	Willow Island Lock	& Dam		
Drainage Area (sq. mi.)	25,000.00		Gauge Th	reshold (cfs):	6468

Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Estimated</u> <u>Available</u> water (cfs)
1	45,700.00	2	
2	49,200.00	-	-
3	65,700.00	i e	
4	56,100.00		
5	38,700.00		
6	24,300.00	-	-
7	16,000.00	36.1	ė.
8	13,400.00	4	r é
9	12,800.00	-	-
10	15,500.00	-	
11	26,300.00	-	4
12	41,300.00		+

Water Availability Profile

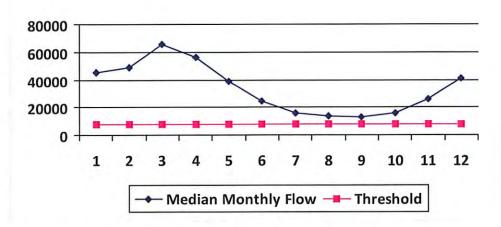

Water Availability Assessment of Location

Min. Gauge Reading (cfs): Passby at Location (cfs):	
Ungauged Stream Safety (cfs):	1,617.00
Headwater Safety (cfs):	0.00
Pump rate (cfs):	2.81
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	-

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

WMP-01220

API/ID Number:

047-017-06250

Operator:

EQT Production Company

514318 (CPT11H3)

Source ID: 17842

Ohio River @ Select Energy Source Name Select Energy

County:

Source Latitude: 39.346473

Source Longitude: -81.338727

HUC-8 Code:

5030201

Drainage Area (sq. mi.):

25000

Pleasants

Anticipated withdrawal start date:

6/1/2013 6/1/2014

Endangered Species?

✓ Mussel Stream?

Anticipated withdrawal end date: Total Volume from Source (gal):

10,200,000

Trout Stream?

☐ Tier 3?

1,500

Regulated Stream?

Proximate PSD?

Gauged Stream?

Ohio River Min. Flow

Max. Pump rate (gpm):

Max. Truck pump rate (gpm)

Max. Simultaneous Trucks:

Reference Gaug

9999998

Ohio River Station: Racine Dam

Drainage Area (sq. mi.)


25,000.00

Gauge Threshold (cfs):

7216

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	50,956.00	-	
2	54,858.00	-	
3	73,256.00		-
4	62,552.00		
5	43,151.00	-	1
6	27,095.00	-	-
7	17,840.00	31	
8	14,941.00	n dia	-
9	14,272.00	(2)	-
10	17,283.00	-	
11	29,325.00		-
12	46,050.00		

Water Availability Profile

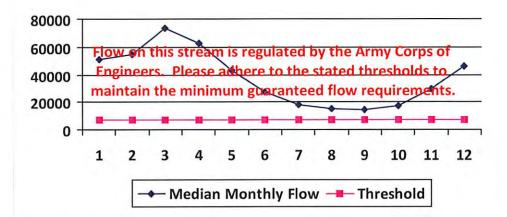

Water Availability Assessment of Location

Base Threshold (cfs): Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	3.34
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

WMP-01220 API/ID Number: 047-017-06250 Operator: EQT Production Company

514318 (CPT11H3)

Source ID: 17843 Source Name Middle Island Creek @ Travis Truck Pad Source Latitude: 39.308545

Michael J. Travis Source Longitude: -80.781102

HUC-8 Code: 5030201

Drainage Area (sq. mi.): 122.83 County: Doddridge Anticipated withdrawal start date: 6/1/2013

Anticipated withdrawal end date: 6/1/2014

Endangered Species? Mussel Stream? Total Volume from Source (gal):

Trout Stream? Total Volume from Source (gal): 10,200,000

Regulated Stream? Max. Pump rate (gpm): 4,200

Proximate PSD? West Union Municipal Water Max. Simultaneous Trucks: 10

Gauged Stream? Max. Truck pump rate (gpm) 420

Reference Gaug 3114500 MIDDLE ISLAND CREEK AT LITTLE, WV

Drainage Area (sq. mi.) 458.00 Gauge Threshold (cfs): 45

Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	131.72	30.99	101.10
2	165.69	30.99	135.07
3	185.40	30.99	154.78
4	137.68	30.99	107.05
5	72.63	30.99	42.00
6	25.36	30.99	-5.26
7	14.35	30.99	-16.27
8	11.82	30.99	-18.81
9	6.05	30.99	-24.57
10	7.60	30.99	-23.02
11	37.14	30.99	6.51
12	90.73	30.99	60.11

Water Availability Profile 200 150 100 1 2 3 4 5 6 7 8 9 10 11 12 Median Monthly Flow Threshold

72.16
0.00
3.02
9.36
13.24
6.55
12.07

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

WMP-01220 API/ID Number: 047-017-06250 Operator: EQT Production Company

514318 (CPT11H3)

Source ID: 17844 Source Name Middle Island Creek @ Rock Run Source Latitude: 39.298763

William Whitehill Source Longitude: -80.760682

William Writeriii 30urce Longitude.

HUC-8 Code: 5030201

Drainage Area (sq. mi.): 107.35 County: Doddridge

Anticipated withdrawal start date: 6/1/2013

Endangered Species? Mussel Stream?

Anticipated withdrawal end date: 6/1/2014

Trout Stream? Total Volume from Source (gal): 10,200,000

Regulated Stream? Max. Pump rate (gpm): 1,680

Proximate PSD? West Union Municipal Water Max. Simultaneous Trucks:


Gauged Stream? Max. Truck pump rate (gpm)

Reference Gaug 3114500 MIDDLE ISLAND CREEK AT LITTLE, WV

Drainage Area (sq. mi.) 458.00 Gauge Threshold (cfs): 45

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	115.12	19.74	95.58
2	144.81	19.74	125.27
3	162.04	19.74	142.50
4	120.33	19.74	100.79
5	63.47	19.74	43.93
6	22.17	19.74	2.63
7	12.54	19.74	-7.00
8	10.33	19.74	-9.21
9	5.29	19.74	-14.25
10	6.65	19.74	-12.89
11	32.46	19.74	12.91
12	79.30	19.74	59.76

Water Availability Profile

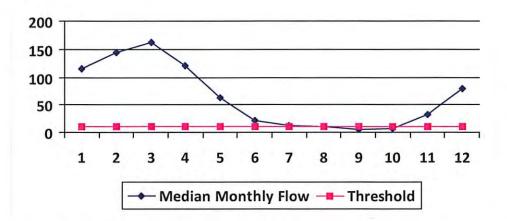

Water Availability Assessment of Location

Min. Gauge Reading (cfs): Passby at Location (cfs):	62.80 26.42
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	2.64
Pump rate (cfs):	3.74
Downstream Demand (cfs):	13.24
Upstream Demand (cfs):	2.81
Base Threshold (cfs):	10.55

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

420

WMP-01220

API/ID Number:

047-017-06250

Operator:

EQT Production Company

514318 (CPT11H3)

Source ID: 17845

Source Name

McElroy Creek @ Wine Withdrawal Site

Elton Wine

Source Latitude: 39.39402

Source Longitude: -80.70576

HUC-8 Code:

5030201

Drainage Area (sq. mi.):

57.19

Doddridge County:

Anticipated withdrawal start date:

6/1/2013

Endangered Species? ✓ Mussel Stream? Anticipated withdrawal end date:

6/1/2014

Trout Stream?

Total Volume from Source (gal):

10,200,000

Regulated Stream?

Tier 3?

Max. Pump rate (gpm):

Max. Truck pump rate (gpm)

1,260

Proximate PSD?

Max. Simultaneous Trucks:

0

Gauged Stream?

3114500

MIDDLE ISLAND CREEK AT LITTLE, WV

Drainage Area (sq. mi.)

Reference Gaug


458.00

Gauge Threshold (cfs):

45

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	61.33	13.47	48.08
2	77.15	13.47	63.90
3	86.32	13.47	73.08
4	64.10	13.47	50.86
5	33.82	13.47	20.57
6	11.81	13.47	-1.44
7	6.68	13.47	-6.56
8	5.50	13.47	-7.74
9	2.82	13.47	-10.43
10	3.54	13.47	-9.71
11	17.29	13.47	4.04
12	42.25	13.47	29.00

Water Availability Profile

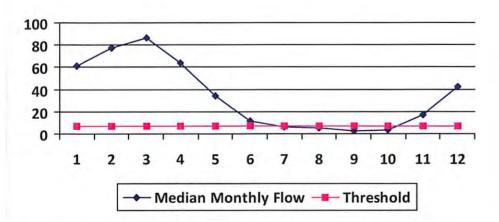


Water Availability Assessment of Location


Min. Gauge Reading (cfs): Passby at Location (cfs):	72.54 10.66
Ungauged Stream Safety (cfs):	1.40
Headwater Safety (cfs):	1.40
Pump rate (cfs):	2.81
Downstream Demand (cfs):	2.23
Upstream Demand (cfs):	2.23
Base Threshold (cfs):	5.62

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

WMP-01220 API/ID Number: 047-017-06250 Operator: **EQT Production Company** 514318 (CPT11H3) Tygart River @ Kuhnes Withdrawal Site A Source ID: 17846 Source Name Source Latitude: 39.35692 Charlie & Peggy Kuhnes Source Longitude: -80.05474 HUC-8 Code: 5020001 Anticipated withdrawal start date: 6/1/2013 Drainage Area (sq. mi.): 1302.2 Taylor County: Anticipated withdrawal end date: 6/1/2014 **Endangered Species?** ✓ Mussel Stream? 10,200,000 Total Volume from Source (gal): Trout Stream? ☐ Tier 3? 1,260 Max. Pump rate (gpm): Regulated Stream? Tygart Valley Dam Proximate PSD? Max. Simultaneous Trucks: 0 0 Gauged Stream? Max. Truck pump rate (gpm) Reference Gaug 3057000 TYGART VALLEY RIVER AT COLFAX, WV 1,363.00 624 Drainage Area (sq. mi.) Gauge Threshold (cfs):

Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	2,968.50	,	. 9
2	3,584.04		
3	3,829.89		1.5
4	2,188.80	-	
5	1,373.55	7-	
6	695.24	2	
7	584.64	+	0.0
8	593.45	2	-
9	661.90	-	-
10	755.75	+	2
11	1,477.45	-	G
12	2,905.01		-



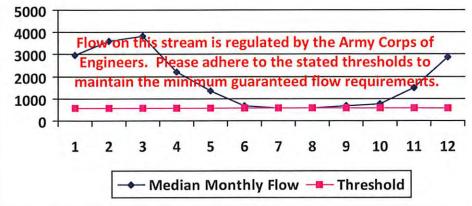

Water Availability Assessment of Location

Upstream Demand (cfs):	20.95
Downstream Demand (cfs):	11.59
Pump rate (cfs):	2.81
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	
Passby at Location (cfs):	-

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

west virginia department of environmental protection



Water Management Plan: **Secondary Water Sources**



WMP-01220

API/ID Number

047-017-06250

Operator:

EQT Production Company

514318 (CPT11H3)

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Ground Water

Source ID: 17847 Source Name

Maxson Property Test Well #1

Source start date:

6/1/2013

Source end date:

6/1/2014

Source Lat:

39.14472

Source Long:

-80.84664

County

Doddridge

Max. Daily Purchase (gal)

Total Volume from Source (gal):

10,200,000

DEP Comments:

514318 (CPT11H3)

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Lake/Reservior

Source ID: 17853 Source Name Pennsboro Lake Source start date: 6/1/2013

Source end date: 6/1/2014

Source Lat: 39.281689 Source Long: -80.925526 County Ritchie

Max. Daily Purchase (gal) Total Volume from Source (gal): 10,200,000

DEP Comments:

Recycled Frac Water


Source ID: 17854 Source Name Various Source start date: 6/1/2013

Source end date: 6/1/2014

Source Lat: Source Long: County

Max. Daily Purchase (gal) Total Volume from Source (gal): 10,200,000

DEP Comments:

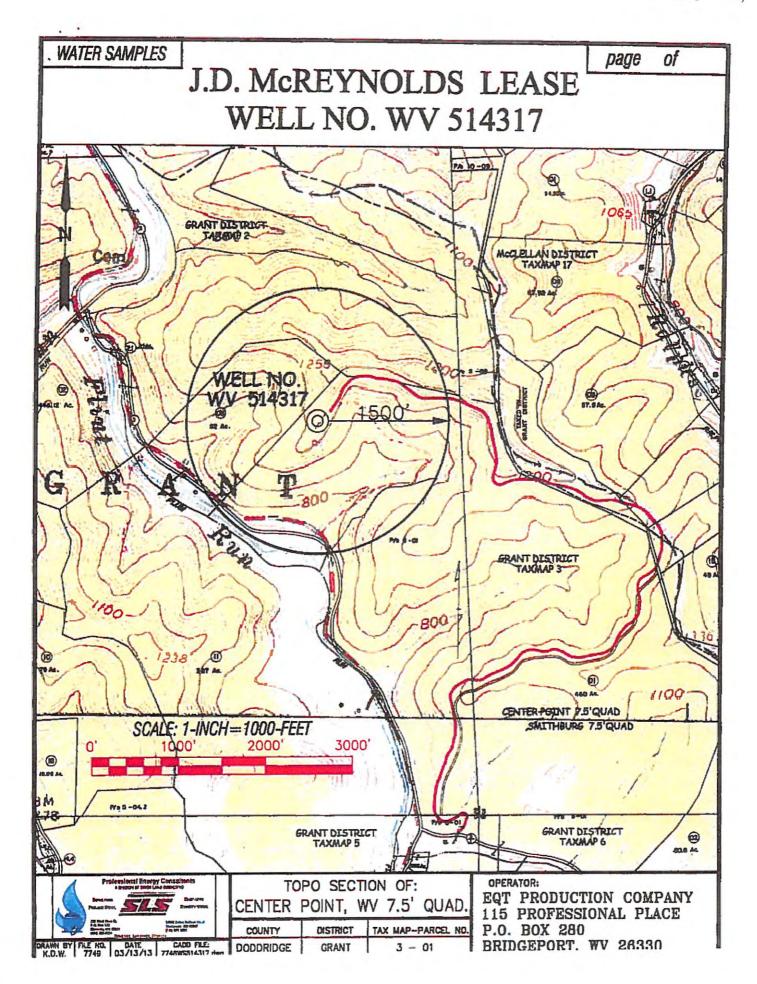

RECEIVED
Office of Oil and Gas

JUN 27 2013

WV Department of Environmental Protection 07/05/2013

