

west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax

Earl Ray Tomblin, Governor Randy C. Huffman, Cabinet Secretary www.dep.wv.gov

PERMIT MODIFICATION APPROVAL

June 25, 2014

ANTERO RESOURCES APPALACHIAN CORPORATION 1625 17TH STREET, SUITE 300 DENVER, CO 80202

Re: Permit Modification Approval for API Number 1706273 , Well #: SWIGER UNIT 1H Changed orientation of lateral

Oil and Gas Operator:

The Office of Oil and Gas has reviewed the attached permit modification for the above referenced permit. The attached modification has been approved and well work may begin. Please be reminded that the oil and gas inspector is to be notified twenty-four (24) hours before permitted well work is commenced.

Please call James Martin at 304-926-0499, extension 1654 if you have any questions.

Gene Smith

Regulatory/Compliance Manager

Office of Oil and Gas



March 14, 2014

Antero Resources 1625 17th Street Denver, Colorado 80202 Office 303.357.7310 Fax 303.357.7315

West Virginia Department of Environmental Protection Office of Oil and Gas Attn: Ms. Laura Cooper 601 57th Street Charleston, WV 25304

Ms. Laura Cooper:

Antero Resources Corporation (Antero) would like to submit the following permit modifications for two approved wells on the existing Stewart Pad. We are requesting to move the horizontal lateral which will change the bottom hole location of the Swiger Unit 1H (API# 47-017-06273), and Swiger Unit 2H (API# 47-017-06283).

Attached you will find the following documents:

- > REVISED Form WW-6B, which shows the revised MD and Production Casing/Cement program
- > REVISED Form WW-6A1, which shows the leases we will be drilling into
- > REVISED Mylar Plat, which shows the new bottom hole location

If you have any questions please feel free to contact me at (303) 357-6817.

Borbeller.

Thank you in advance for your consideration.

Sincerely,

Lisa Bottinelli

Permit Representative

Antero Resources Corporation

Enclosures

RECEIVED
Office of Oil and Gas

MAR 1 7 2014

WV Department of Environmental Protection WW-6B (9/13)

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS WELL WORK PERMIT APPLICATION

1) Well Operate	or: Antero Res	ources Corporation	494488557	017-Doddridge	New Milton	New Milton
· 70			Operator ID	County	District	Quadrangle
2) Operator's W	Vell Number: S	wiger Unit 1H	Well Pad	Name: Stewa	rt Pad (Exi	sting)
3) Farm Name/	Surface Owner	Randall & Carolyn S. S	Stewart Public Road	d Access: CR	56	
4) Elevation, cu	irrent ground:	1332' Ele	evation, proposed p	oost-construction	on: 1332'	
5) Well Type (a) Gas Oil Underground Storage						
	Other					
	(b)If Gas Sl	nallow	Deep			
		orizontal				
6) Existing Pad				è		
		(s), Depth(s), Antici				
		Inticipated Thickness-	bu Feet, Associated	Pressure- 3250#		
		oth: 7600' TVD	eur our			
9) Formation at	Total Vertical	Depth: Marcellus S	Shale			
10) Proposed T	otal Measured	Depth: 17,200' MD)			
11) Proposed H	orizontal Leg I	Length: 9296'				
12) Approxima	te Fresh Water	Strata Depths:	317', 362'			
13) Method to I	Determine Fres	h Water Depths:	Offset well records. Dep	oths have been adj	usted accordi	ing to surface elevations.
14) Approxima	te Saltwater De	pths: 2345'				
15) Approxima	te Coal Seam D	Depths: 825', 945', 1	167', 1776'			
16) Approxima	te Depth to Pos	sible Void (coal mi	ne, karst, other): 1	None anticipated		
		on contain coal seam to an active mine?	rs Yes	No	√	
(a) If Yes, pro	vide Mine Info	: Name:				
		Depth:			RECE	VED
		Seam:		Of	fice of O	and Gas
		Owner:			I RAM	7 2014
					MINIT	

WV Department of Environmental Protection WW-6B (9/13) 4701706273

18)

CASING AND TUBING PROGRAM

TYPE	Size	New or Used	Grade	Weight per ft. (lb/ft)	FOOTAGE: For Drilling	INTERVALS: Left in Well	CEMENT: Fill-up (Cu. Ft.)
Conductor	20"	New	H-40	94#	40'	40'	CTS, 38 Cu. Ft.
Fresh Water	13-3/8"	New	J-55/H-40	54.5#/ 48#	415'	415' *see above	CTS, 577 Cu. Ft.
Coal	9-5/8"	New	J-55	36#	2510'	2510'	CTS, 1022 Cu. Ft.
Intermediate							
Production	5-1/2"	New	P-110	20#	17200'	17200'	4314 Cu. Ft.
Tubing	2-3/8"	New	N-80	4.7#		7100'	
Liners							

TYPE	Size	Wellbore Diameter	Wall Thickness	Burst Pressure	Cement Type	Cement Yield (cu. ft./k)
Conductor	20"	24"	0.438"	1530	Class A	1.18
Fresh Water	13-3/8"	17-1/2"	0.38"/0.33"	2730/1730	Class A	1.18
Coal	9-5/8"	12-1/4"	0.352"	3520	Class A	1.18
Intermediate						
Production	5-1/2"	8-3/4" & 8-1/2"	0.361"	12630	Lead-H/POZ & Tail - H	H/POZ-1.44 & H-1.8
Tubing	2-3/8"	4.778"	0.19"	11200		
Liners						


PACKERS

Kind:	N/A	
Sizes:	N/A	
Depths Set:	N/A	RECEIVED Gas

MAR 1 7 2014

WV Department of Environmental Protection WW-6B (9/13)

19) Describe proposed well work, including the drilling and plugging back	of any pilot hole:
Drill, perforate, fracture a new horizontal shallow well and complete Marcellus Sha	ale.
20) Describe fracturing/stimulating methods in detail, including anticipate	ed max pressure and max rate:
Antero plans to pump Slickwater into the Marcellus Shale formation in order to rea be comprised of approximately 99 percent water and sand, with less than 1 perce the attached "List of Anticipated Additives Used for Fracturing or Stimulating Well.	nt special-purpose additives as shown in
21) Total Area to be disturbed, including roads, stockpile area, pits, etc., (a	acres):
22) Area to be disturbed for well pad only, less access road (acres): 2.26	3 acres
23) Describe centralizer placement for each casing string:	
Conductor: no centralizers Surface Casing: one centralizer 10' above the float shoe, one on the insert float collar and one even to surface.	y 4th joint spaced up the hole
Intermediate Casing: one centralizer above float joint, one centralizer 5' above float collar and one Production Casing: one centralizer at shoe joint and one every 3 joints to top of cement in intermed	
24) Describe all cement additives associated with each cement type:	
Conductor: no additives, Class A cement. Surface: Class A cement with 2-3% calcium chloride	
Intermediate: Class A cement with $1/4$ lb of flake, 5 gallons of clay treat Production: Lead cement- $50/50$ Class H/Poz + 1.5% salt + 1% C- 45 + 0.5% C- $16a$ + 0.2% C- 12 + 0.4%	5% C-20 ± 0.05% C-51
Production: Tail cement- Class H + 45 PPS Calcium Carbonate + 1.0% FL-160 + 0.2% ACGB-47 + 0.05	
25) Proposed borehole conditioning procedures:	
Conductor: blowhole clean with air, run casing, 10 bbls fresh water. Surface: blowhole clean with air, trip to conductor shoe, trip to bottom, blowhole clean with air, tri	ip out, run casing, circulatemine caractiv + 40 bb/s
fresh water followed by 25 bbls bentonite mud, 10 bbls fresh water spacer. Intermediate: blowhole clean with air, trip to surface casing shoe, trip to bottom, blowhole clean w	with air, trip out, contains a Cil and Cara
water followed by 10 bbls fresh water and 25 bbls bentonite mud, pump 10 bbls fresh water. Production: circulate with 14 lb/gal NaCl mud, trip to middle of lateral, circulate, pump high viscosi sweep, trip to top of curve, trip to bottom, circulate, pump high viscosity sweep, trip out, run casin barite pill, pump 10 bbls fresh water followed by 48 bbls mud flush and 10 bbls water.	ty sweep, trip to base of வூருவு pump high viscosity
	WV Departal Protection
*Note: Attach additional sheets as needed.	Eunion

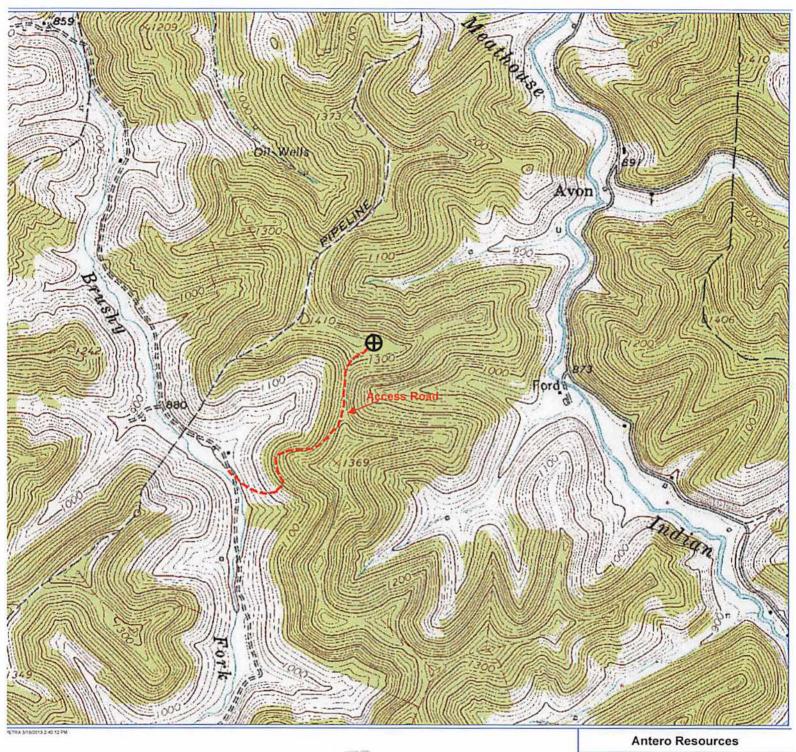

V.V. Department of Environmental Protection

Appalachian Basin

Swiger Unit 1H

Doddridge County



REMARKS Quadrangle: New Milton Watershed: Toms Fork Meathouse Fork Dsistrict: New Milton

March 18, 2013

