

west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax Earl Ray Tomblin, Governor Randy C. Huffman, Cabinet Secretary www.dep.wv.gov

PERMIT MODIFICATION APPROVAL

June 25, 2014

ANTERO RESOURCES APPALACHIAN CORPORATION 1625 17TH STREET, SUITE 300 DENVER, CO 80202

Re: Permit Modification Approval for API Number 1706283 , Well #: SWIGER UNIT 2H Changed Orientation of Lateral

Oil and Gas Operator:

The Office of Oil and Gas has reviewed the attached permit modification for the above referenced permit. The attached modification has been approved and well work may begin. Please be reminded that the oil and gas inspector is to be notified twenty-four (24) hours before permitted well work is commenced.

Please call James Martin at 304-926-0499, extension 1654 if you have any questions.

12

Gene Smith

Regulatory/Compliance Manager

Office of Oil and Gas



March 14, 2014

Antero Resources 1625 17th Street Denver, Colorado 80202 Office 303.357.7310 Fax 303.357.7315

West Virginia Department of Environmental Protection Office of Oil and Gas Attn: Ms. Laura Cooper 601 57th Street Charleston, WV 25304

Ms. Laura Cooper:

Antero Resources Corporation (Antero) would like to submit the following permit modifications for two approved wells on the existing Stewart Pad. We are requesting to move the horizontal lateral which will change the bottom hole location of the Swiger Unit 1H (API# 47-017-06273), and Swiger Unit 2H (API# 47-017-06283).

Attached you will find the following documents:

- > REVISED Form WW-6B, which shows the revised MD and Production Casing/Cement program
- > REVISED Form WW-6A1, which shows the leases we will be drilling into
- REVISED Mylar Plat, which shows the new bottom hole location

If you have any questions please feel free to contact me at (303) 357-6817.

Thank you in advance for your consideration.

Sincerely,

Lisa Bottinelli

Permit Representative

Antero Resources Corporation

Enclosures

RECEIVED
Office of Oil and Gas

MAR 1 7 2014

WW Department of Environmental Protection WW-6B (9/13)

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS WELL WORK PERMIT APPLICATION

1) Well Operate	or: Antero Re	esources Co	rporation	494488557	017-Doddridge	New Milton	New Milton
D. (20)				Operator ID	County	District	Quadrangle
2) Operator's W	Vell Number:	Swiger Uni	t 2H	Well Pad	Name: Stewa	rt Pad (Exi	sting)
3) Farm Name/	Surface Own	er: Randall &	Carolyn S. S	Stewart Public Road	d Access: CR 5	56	
4) Elevation, cu	irrent ground:	1332'	Ele	evation, proposed p	oost-construction	on: 1332'	
5) Well Type	(a) Gas		Oil	■ Unde	rground Storag	е	
	Other _						
	(b)If Gas	Shallow		Deep			1.
		Horizontal					
6) Existing Pad	-					200 00 00	
	•			pated Thickness at 60 Feet, Associated			
-				oo reet, Associated	F1655016- 3230#		
8) Proposed To			O' TVD Marcellus S	Shalo			
9) Formation at							
10) Proposed T	otal Measure	d Depth:	19,900' MD	<u>) </u>			1
11) Proposed H	orizontal Leg	Length: 1	1,919'				
12) Approxima	te Fresh Wate	er Strata Dep	oths:	317', 362'			
13) Method to I	Determine Fre	esh Water D	epths: C	Offset well records. Dep	oths have been adj	usted accordi	ng to surface elevations.
14) Approxima	te Saltwater I	Depths: 23	345'				
15) Approxima	te Coal Seam	Depths: 8	25', 945', 1	167', 1776'			
16) Approxima	te Depth to Po	ossible Void	l (coal mi	ne, karst, other): _	None anticipated		
17) Does Propo directly overlying				Yes	No.	√	
(a) If Yes, pro	vide Mine In	fo: Name:					
N 10		Depth:	0				
		Seam:	10				-n
		Owner	% 			R	of Oil and Gas
			#8 <u> </u>		_	Office	of Oll are

MAR 1 7 2014
What opertment of Environment of 4/2014

WW-6B (9/13) 4701706283

18)

CASING AND TUBING PROGRAM

TYPE	Size	New or Used	Grade	Weight per ft. (lb/ft)	FOOTAGE: For Drilling	INTERVALS: Left in Well	CEMENT: Fill-up (Cu. Ft.)
Conductor	20"	New	H-40	94#	40'	40'	CTS, 38 Cu. Ft.
Fresh Water	13-3/8"	New	J-55/H-40	54.5#/ 48#	432'	432' *see above	CTS, 600 Cu. Ft.
Coal	9-5/8"	New	J-55	36#	2450'	2450'	CTS, 998 Cu. Ft
Intermediate							
Production	5-1/2"	New	P-110	20#	19900'	19900'	5082 Cu. Ft.
Tubing	2-3/8"	New	N-80	4.7#		7200'	
Liners							

TYPE	Size	Wellbore Diameter	Wall Thickness	Burst Pressure	Cement Type	Cement Yield (cu. ft./k)
Conductor	20"	24"	0.438"	1530	Class A	1.18
Fresh Water	13-3/8"	17-1/2"	0.38"/0.33"	2730/1730	Class A	1.18
Coal	9-5/8"	12-1/4"	0.352"	3520	Class A	1.18
Intermediate						
Production	5-1/2"	8-3/4" & 8-1/2"	0.361"	12630	Lead-H/POZ & Tail - H	H/POZ-1.44 & H-1.8
Tubing	2-3/8"	4.778"	0.19"	11200		
Liners						

PACKERS

Kind:	N/A	
Sizes:	N/A	
Depths Set:	N/A	

Office of Oil and Gas

MAR 1 7 2014

WV Department of Environment of 07/04/2014

WW-6B (9/13)

4701706283

19) Describe proposed well work, including the drilling and plugging back of any pilot noie:
Drill, perforate, fracture a new horizontal shallow well and complete Marcellus Shale.
20) Describe fracturing/stimulating methods in detail, including anticipated max pressure and max rate:
Antero plans to pump Slickwater into the Marcellus Shale formation in order to ready the well for production. The fluid will be comprised of approximately 99 percent water and sand, with less than 1 percent special-purpose additives as shown in the attached "List of Anticipated Additives Used for Fracturing or Stimulating Well."
21) Total Area to be disturbed, including roads, stockpile area, pits, etc., (acres): 25.09 acres
22) Area to be disturbed for well pad only, less access road (acres): 2.26 acres
23) Describe centralizer placement for each casing string:
Conductor: no centralizers Surface Casing: one centralizer 10' above the float shoe, one on the insert float collar and one every 4th joint spaced up the hole to surface.
Intermediate Casing: one centralizer above float joint, one centralizer 5' above float collar and one every 4th collar to surface.
Production Casing: one centralizer at shoe joint and one every 3 joints to top of cement in intermediate casing.
24) Describe all cement additives associated with each cement type: Conductor: no additives, Class A cement.
Surface: Class A cement with 2-3% calcium chloride
Intermediate: Class A cement with 1/4 lb of flake, 5 gallons of clay treat Production: Lead cement- 50/50 Class H/Poz + 1.5% salt + 1% C-45 + 0.5% C-16a + 0.2% C-12 + 0.45% C-20 + 0.05% C-51
Production: Tail cement- Class H + 45 PPS Calcium Carbonate + 1.0% FL-160 + 0.2% ACGB-47 + 0.05% ACSA-51 + 0.2% ACR-20

25) Proposed borehole conditioning procedures:

Conductor: blowhole clean with air, run casing, 10 bbls fresh water.

Surface: blowhole clean with air, trip to conductor shoe, trip to bottom, blowhole clean with air, trip out, run casing, circulate pipe capacity + 40 bbls fresh water followed by 25 bbls bentonite mud, 10 bbls fresh water spacer.


fresh water followed by 25 bbls bentonite mud, 10 bbls fresh water spacer.

Intermediate: blowhole clean with air, trip to surface casing shoe, trip to bottom, blowhole clean with air, trip out, run casing, circulate to bbls trine water followed by 10 bbls fresh water and 25 bbls bentonite mud, pump 10 bbls fresh water.

Production: circulate with 14 lb/gal NaCl mud, trip to middle of lateral, circulate, pump high viscosity sweep, trip to base of curve, trip to bottom, circulate, pump high viscosity sweep, trip out, run casing, circulate 10 bbls fresh water, pump 48 bbls barite pill, pump 10 bbls fresh water followed by 48 bbls mud flush and 10 bbls water.

*Note: Attach additional sheets as needed.

*Note: Attach additional sheets as needed.

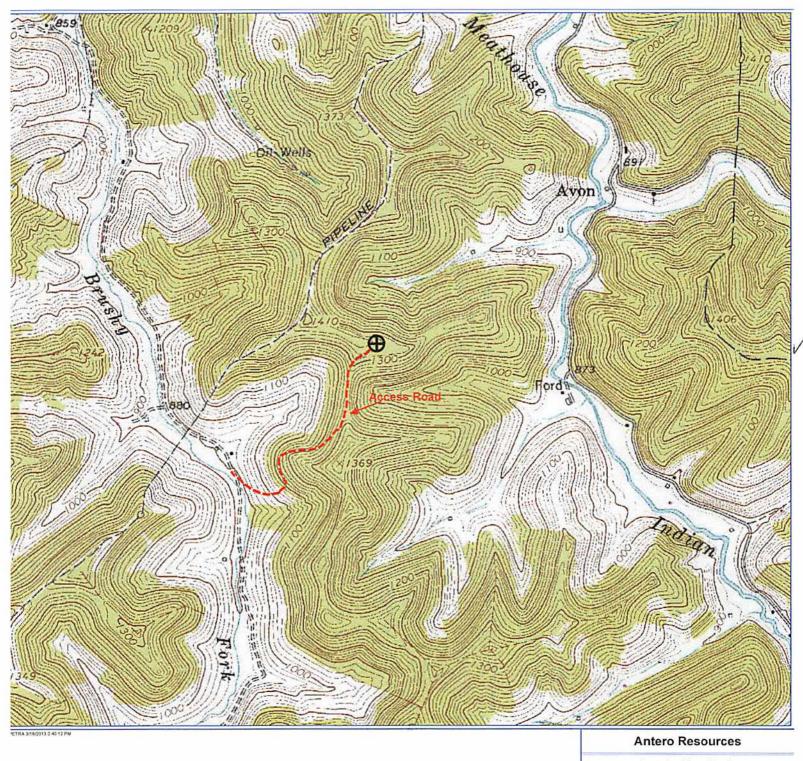

Received Office of Oil & Gas

MAY 2 3 2013

