

west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax Earl Ray Tomblin, Governor Randy C. Huffman, Cabinet Secretary www.dep.wv.gov

November 20, 2013

WELL WORK PERMIT Horizontal 6A Well

This permit, API Well Number: 47-1706331, issued to EQT PRODUCTION COMPANY, is evidence of permission granted to perform the specified well work at the location described on the attached pages and located on the attached plat, subject to the provisions of Chapter 22 of the West Virginia Code of 1931, as amended, and all rules and regulations promulgated thereunder, and to all conditions and provisions outlined in the pages attached hereto. Notification shall be given by the operator to the Oil and Gas Inspector at least 24 hours prior to the construction of roads, locations, and/or pits for any permitted work. In addition, the well operator shall notify the same inspector 24 hours before any actual well work is commenced and prior to running and cementing casing. Spills or emergency discharges must be promptly reported by the operator to 1-800-642-3074 and to the Oil and Gas inspector.

Please be advised that form WR-35, Well Operators Report of Well Work is to be submitted to this office within 90 days completion of permitted well work, as should form WR-34 Discharge Monitoring Report within 30 days of discharge of pits, if applicable. Failure to abide by all statutory and regulatory provisions governing all duties and operations hereunder may result in suspension or revocation of this permit and, in addition, may result in civil and/or criminal penalties being imposed upon the operators.

In addition to the applicable requirements of this permit, and the statutes and rules governing oil and gas activity in WV, this permit may contain specific conditions which must be followed. Permit conditions are attached to this cover letter.

Per 35CSR-4-5.2.g this permit will expire in two (2) years from the issue date unless permitted well work is commenced. If there are any questions, please feel free to contact me at (304) 926-0499 ext. 1654.

James Martin

Chief

Operator's Well No: WV 513142

Farm Name: HEASTER, CHARLES P. ., ET AL

API Well Number: 47-1706331

Permit Type: Horizontal 6A Well

Date Issued: 11/20/2013

API Number: 1706331

PERMIT CONDITIONS

West Virginia Code § 22-6A-8(d) allows the Office of Oil and Gas to place specific conditions upon this permit. Permit conditions have the same effect as law. Failure to adhere to the specified permit conditions may result in enforcement action.

CONDITIONS

- This proposed activity may require permit coverage from the United States Army Corps of Engineers (USACOE). Through this permit, you are hereby being advised to consult with USACOE regarding this proposed activity.
- 2. If the operator encounters an unanticipated void, or an anticipated void at an unanticipated depth, the operator shall notify the inspector within 24 hours. Modifications to the casing program may be necessary to comply with W. Va. Code § 22-6A-5a (12), which requires drilling to a minimum depth of thirty feet below the bottom of the void, and installing a minimum of twenty (20) feet of casing. Under no circumstance should the operator drill more than fifty (50) feet below the bottom of the void or install less than twenty (20) feet of casing below the bottom of the void.
- 3. When compacting fills, each lift before compaction shall not be more than 12 inches in height, and the moisture content of the fill material shall be within limits as determined by the Standard Proctor Density test of the actual soils used in specific engineered fill, ASTM D698, Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort, to achieve 95 % compaction of the optimum density. Each lift shall be tested for compaction, with a minimum of two tests per lift per acre of fill. All test results shall be maintained on site and available for review.
- 4. Operator shall install signage per § 22-6A-8g (6) (B) at all source water locations included in their approved water management plan within 24 hours of water management plan activation.
- 5. Oil and gas water supply wells will be registered with the Office of Oil and Gas and all such wells will be constructed and plugged in accordance with the standards of the Bureau for Public Health set forth in its Legislative rule entitled Water Well Regulations, 64 C.S.R. 19. Operator is to contact the Bureau of Public Health regarding permit requirements. In lieu of plugging, the operator may transfer the well to the surface owner upon agreement of the parties. All drinking water wells within fifteen hundred feet of the water supply well shall be flow tested by the operator upon request of the drinking well owner prior to operating the water supply well.
- Pursuant to the requirements pertaining to the sampling of domestic water supply wells/springs the operator shall, no later than thirty (30) days after receipt of analytical data provide a written copy to the Chief and any of the users who may have requested such analyses.
- 7. If any explosion or other accident causing loss of life or serious personal injury occurs in or about a well or well work on a well, the well operator or its contractor shall give notice, stating the particulars of the explosion or accident, to the oil and gas inspector and the Chief, within 24 hours of said accident.
- During the casing and cementing process, in the event cement does not return to the surface, the oil and gas inspector shall be notified within 24 hours.

4701706331

WW-6B ~ (3/13)

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS W.VA. CODE §22-6A - WELL WORK PERMIT APPLICATION

1) Well Operator:	EQT Produ	action Company			017	8	526
i, voon operation				Operator ID	County	District	Quadrangle
2) Operator's Well	Number:		513142		Well Pad Name	0	XF156
3 Elevation, curren	t ground:	1,244'	Eleva	tion, proposed p	ost-construction:	1,203'	
4) Well Type: (a) G	ias•	Oil	Ur	derground Store	age		
0	ther						
•							
(b)	If Gas:	Shallow	•	Deep			. A) a
		Horizontal	•				9-16-2013
5) Existing Pad? Ye	es or No:	no					9-10
6) Proposed Targe	t Formation(s), Depth(s), Anti	cipated Thic	kne ss es and As	sociated Pressure	e(s):	
					be 54 feet and anticip		ire of 4449 PSI
7) Proposed Total		-			6,613'		
8) Formation at To					Marcellus		
9) Proposed Total I					11,811'		
10) Approximate Fi				164, 2	11, 315, 381, 457,		
11) Method to Dete					By offset well	s	
12) Approximate Sa					1383 & 1451		
13) Approximate C					1267 & 1307		
14) Approximate D						None repor	ted
15)Does propos							
-		? If so, indicate n				None Repor	
16) Describe propo					the marcellus formation	n. The vertical dr	ill to go down to
an approximate de	pth of 4,932'. Ti	en kick off the horize	ontal teg into th	e marcellus using a	slick water frac.		
							1311
17) Describe fractu	ring/stimulati	na methods in de	etail:				
Hydraulic fracturing is co	•	•		water recycled from	n previously fractured	wells and obtained	i from
freshwater sources. Thi							
geiling agent, gel break							
400,000 gallens of water							
18) Total area to be	disturbed, li	nciuding roads, s	tockpile area	a, pits, etc. (acre	es):	± 37.4	3
19) Area to be distu	irbed for well	pad only, less a	ccess road (acres):		± 26.22	

Office of Gave 2013

SEP 03 2013

WV Department of Environmental Protect

Page 1 of 3

CASING AND TUBING PROGRAM

20) TYPE	Size	New	Grade	Weight per	FOOTAGE:	INTERVALS:	CEMENT:
		or		<u>ft.</u>	for Drilling	Left in Well	Fill- up (Cu.Ft.)
		Used					
Conductor	20	New	Varies	81	40	40	38
Fresh Water	13 3/8	New	MC-50 .	54	1,179	1,179	1,018
Coal	-	<u>-</u>	-	•	•	•	-
ntermediate	9 5/8	New	MC-50	40	2,963	2,963	1,151
Production	5 1/2	New	P-110	20	11,811'	11,811'	See Note 1
Tubing	2 3/8		J-55	4.6			May not be run, if run will be set 100' less than TD
Liners							1

Cement Yield Cement **Burst** TYPE Size Wellbore Wall <u>Pressure</u> <u>Type</u> **Diameter Thickness** Construction 1.18 0.635 20 24 Conductor 1.21 2,480 1 17 1/2 0.38 13 3/8 Fresh Water -• Coal 1 1.21 3,590 9 5/8 12 3/8 0.395 <u>Intermediate</u> 1.27/1.86 12,640 5 1/2 8 1/2 0.361 **Production** Tubing Liners

<u>Packers</u>

Kind:	N/A		
Sizes:	N/A		
Depths Set:	N/A		

Note 1: EQT plans to bring the TOC on the production casing cement job 1,000' above kick off point, which is at least 500' above the shallowest production zone, to avoid communication.

Page 2 of 3

Office of Oil & Gas

SEP 03 2013

WV Department of the Profession of the Profesion of the P

21) Describe centralizer placement for each casing string.

*Note: Attach additional sheets as needed.

Surface: Bow spring centralizers – One at the shoe and one spaced every 500'.					
• Intermediate: Bow spring centralizers— One cent at the shoe and one spaced every 500'.					
Production: One spaced every 1000' from KOP to Int csg shoe					
22) Describe all cement additives associated with each cement type. Surface (Type 1 Cement): 0-3% Calcium Chloride					
Used to speed the setting of cement slurries.					
0.4% flake. Loss Circulation Material (LCM) is used to combat the loss of the cement slurry to a thief zone.					
Intermediate (Type 1 Cement): 0-3% Calcium Chloride. Salt is used in shallow, low temperature formations to speed the setting of cement					
slurries. 0.4% flake. Loss Circulation Material (LCM) is used to combat the loss of whole drilling fluid or cement slurry (not filtrate)					
to a thief zone.					
<u>Production:</u>					
<u>Lead (Type 1 Cement)</u> : 0.2-0.7% Lignosulfonate (Retarder). Lengthens thickening time.					
0.3% CFR (dispersant). Makes cement easier to mix.					
Tail (Type H Cement): 0.25-0.40% Lignosulfonate (Retarder). Lengthens thickening time.					
0.2-0.3% CFR (dispersant). This is to make the cement easier to mix.					
60 % Calcuim Carbonate. Acid solubility.					
0.4-0.6% Halad (fluid loss). Reduces amount of water lost to formation.					
23) Proposed borehole conditioning procedures. <u>Surface</u> : Circulate hole clean (Approximately 30-45 minutes) rotating & reciprocating					
one full joint until cuttings diminish at surface. When cuttings returning to surface diminish, continue to circulate an additional 5					
minutes. To ensure that there is no fill, short trip two stands with no circulation. If there is fill, bring compressors back on					
and circulate hole clean. A constant rate of higher than expected cuttings volume likely indicates washouts that will not clean up.					
Intermediate: Circulate hole clean (Approximately 30-45 minutes) rotating & reciprocating one full joint until cuttings diminish at					
surface. When cuttings returning to surface diminish, continue to circulate an additional 5 minutes. If foam drilling, to enhance					
hole cleaning use a soap sweep or increase injection rate & foam concentration.					
<u>Production:</u> Pump marker sweep with nut plug to determine actual hole washout. Calculate a gauge holes bottoms up volume.					
Perform a cleanup cycle by pumping 3-5 bottoms up or until the shakers are clean. Check volume of cuttings coming across					
the shakers every 15 minutes.					

Page 3 of 3

11/22/2013




Oxford

Doddridge

West Virgina

Azimuth 155 Vertical Section 4462

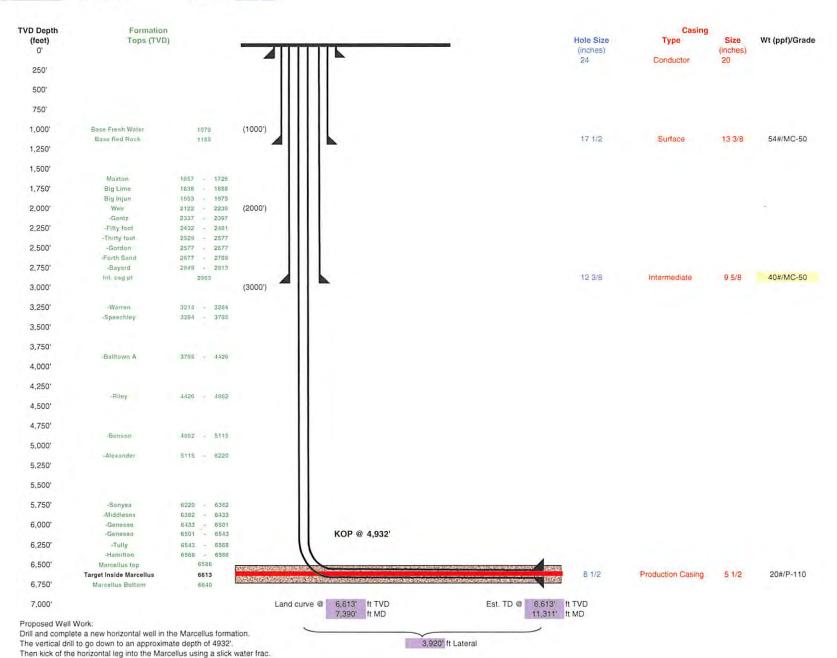


Received

AUG -2 300

Office of Oil and Gas WV Dept. of Environmental Protection Well Schematic

17-06331

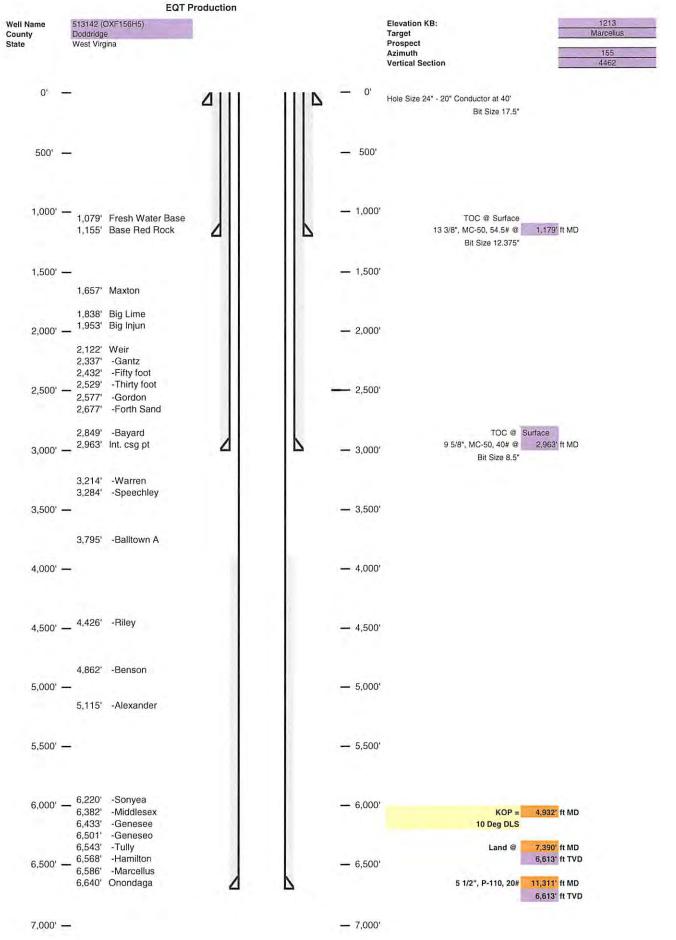

11/22/2013

Received



WW-9 (5/13)

	Page	1	of	2
API No. 47	- 0.	17 -	_	0
Operator's	Well N	0.		513142

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS

Fluids/Cuttings Disposal & Reclamation Plan

Operator Name	EQ	T Production Co.		OP Code	
Watershed (HUC10)	Left F	Fork Arnolds Creek	Quad	Irangle	Oxford 7.5'
Elevation	1,203'	County	Doddridge	District_	West Union
Do you anticipate usir	g more than 5	,000 bbls of water	to complete the p	proposed well w	vork? Yes x No
Will a plt be used for e	drill cuttings: Ye	es:No:	X		
If so please de	escribe anticipat	ed pit waste:			
Will a syntheti	c liner be used i	n the pit? Yes	No	X If s	o, what ml.? 60
Proposed Di	 Land A Underg Reuse Off Site 	(at API Number e Disposal (Su	(UIC Permit N	for disposal loc)
	cipated for this I, what type? S	well? Air, freshwa ynthetic, petroleur	m, etc		nd water based mud
		***************************************	, Lubricant, Detergent, Defoar		
Drill cuttings disposa					
			used? (Cement, Line,		n/a
Landilli or o	ffsite name/pern	nit number?		See Attached	LIST
on August 1, 2005, by the C provisions of the permit are or regulation can lead to en	office of Oil and Garenforceable by law forcement action. by of law that I have chments thereto a lat the information in including the possible atture ed Name)	as of the West Virginia w. Violations of any te e personally examined and that, based on my is true, accurate, and	rm or condition of the land am familiar with inquiry of those individually complete. I am aware sonment.	onmental Protection general permit and the information suit duals immediately that there are sign J. Roark	on. I understand that the d/or other applicable law bmitted on this responsible for obtaining
Subscribed and sworn	before me this	19	day of	٧_	, 20_/3
A		1 .			Notary Public
My commission expire	s	101/001	<u> ව</u>	M	OFFICIAL SEAL OTATY Public, Clate OLWest Virginia NICHOLAS L. BUMGARDNER Rt. 1 Box 4 Liberty, WV 25124 y Commission Expires June 27, 2018

Office of 1/22/2013

Office of 1/22/2013

SEP 0 3 2013

WV Department of Environmental Protection

4701706331

WW-9		Opera	ator's Well No.	513142
Proposed Revegetation	on Treatment: Acres Disturbe	od 37.43	Prevegetation p	H <u>6.6</u>
Lime	3 Tons/acre	or to correct to pH	6.5	
Fertilizer (10	-20-20 or equivalent)	1/3 lbs/acre (500 lbs minimum)	
Mulch	2	Tons/acre		
		Seed Mixtures		
,	Area I		Area II	
Seed Type KY-31	lbs/acre 40	Seed Typ Orchard Gras	= '	bs/acre 5
Alsike Clover	5	Alsike Clover	5	<u> </u>
Annual Rye	15			
Photocopied section o	f involved 7.5° topographic si	neet.		
Plan Approved by: _	Dougles News	lon		
Comments: Pics	secil & Mulch	install E	+5 to w	J
Dep regula	ations			
Title: Dil T	Tas inspector	Date:	-16-2013	
Field Reviewed?	()	Yes () No	

Office of 22/2013

SEP 03 2013

WV Department of Environmental Protect

EQT Production Water plan Offsite disposals for Marcellus wells

CWS TRUCKING INC.

P.O. Box 391 Williamstown, WV 26187 740-516-3586 Noble County/Noble Township Permit # 3390

LAD LIQUID ASSETS DISPOSAL INC.

226 Rankin Road Washington, PA 15301 724-350-2760 724-222-6080 724-229-7034 fax Ohio County/Wheeling Permit # USEPA WV 0014

TRI COUNTY WASTE WATER MANAGEMENT, INC.

1487 Toms Run Road Holbrook, PA 15341 724-627-7178 Plant 724-499-5647 Office Greene County/Waynesburg Permit # TC-1009

Waste Management - Meadowfill Landfill

Rt. 2, Box 68 Dawson Drive Bridgeport, WV 26330 304-326-6027 Permit #SWF-1032-98 Approval #100785WV

Waste Management - Northwestern Landfill

512 E. Dry Road Parkersburg, WV 26104 304-428-0602 Permit #SWF-1025 WV-0109400 Approval #100833WV

BROAD STREET ENERGY LLC

37 West Broad Street Suite 1100 Columbus, Ohio 43215 740-516-5381 Washington County/Belpre Twp. Permit # 8462

TRIAD ENERGY

P.O. Box 430
Reno, OH 45773
740-516-6021 Well
740-374-2940 Reno Office Jennifer
Nobel County/Jackson Township
Permit # 4037

KING EXCAVATING CO.

Advanced Waste Services 101 River Park Drive New Castle, Pa. 16101 Facility Permit# PAR000029132





Site Specific Safety and Environmental Plan For

EQT OXF 156 Pad

Doddridge County, WV

	CONTRACTOR IN COLUMN TO THE PARTY OF THE PAR	
	For Wells:513142	
That It	Prepared:	July 31, 2013 Douglas Asular
Denmitting Sperisor		WV Oil and Gas Inspector Oil @ Das enspector Title
7-31-13 ate		1/6-2613 Date

RECEIVE 14/22/2013
Office of Oil and Gas

NOV 1 2 2013

WV Department of Environmental Protection

west virginia department of environmental protection



Water Management Plan: Primary Water Sources



WMP-01495

API/ID Number:

047-017-06331

Operator:

EQT Production Company

513142 (OXF156H5)

Important:

For each proposed primary water source (including source intakes for purchased water sources) identified in your water management plan, and summarized herein, DEP has made an evaluation concerning water availability over the specified date range. DEP's assessment is based on the following considerations:

- •Statistical analysis of historical USGS stream gauge data (transferred to un-gauged locations as necessary);
- •Identification of sensitive aquatic life (endangered species, mussels, etc.);
- Quantification of known existing demands on the water supply (Large Quantity Users);
- •Minimum flows required by the Army Corps of Engineers; and
- · Designated stream uses.

Based on these factors, DEP has provided, for each intake location (and origination point for purchased water), a reference gauge location and discharge flow reading which must be surpassed prior to withdrawals. Additionally, DEP has established a minimum passby flow at the withdrawal location which must also be surpassed prior to withdrawals. These thresholds are considered terms of the permit and are enforceable as such.

DEP is aware that some intake points will be used for mutiple wells and well sites. In these cases, the thresholds set by the Water Management Plan are to be interepreted as total withdrawal limits for each location over the specified date range regardless of how many wells are supported by that intake.

For all purchased water intakes, determinations of water availability are made at the original source intake location. It is the responsibility of the Oil and Gas Operator, not the seller, to cease withdrawal of water from the seller when flows are less than the minimum gauge reading at the stream gauge referenced by the Water Management Plan in order to protect stream uses.

Note that the determinations made herein are based on the best available data, but it is impossible to predict water availability in the future. While the DEP has carefully established these minimum withdrawal thresholds, it remains the operator's responsibility to protect aquatic life at all times. Approval to withdrawal is contingent upon permission from the land owner. It is the responsibility of the operator to secure and maintain permission prior to any withdrawals.

The operator is reminded that 24-48 hours prior to withdrawing (or purchasing) water, DEP must be notified by email at DEP.water.use@wv.gov.

APPROVED NOV 0 1 2013

Source Summary

WMP-01495

API Number:

047-017-06331

Operator:

EQT Production Company

513142 (OXF156H5)

Stream/River

Ohio River @ Westbrook Trucking Site Source

Pleasants

Owner:

Stephen R. and Janet Sue

Westbrook

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

9/15/2013

9/15/2014

6.600.000

999999

39.384455

-81.25645

☐ Regulated Stream?

Ohio River Min. Flow

Ref. Gauge ID:

Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm):

1,260

Min. Gauge Reading (cfs):

6,468.00

Min. Passby (cfs)

DEP Comments:

Refer to the specified station on the National Weather Service's Ohio River forecast

website: http://www.erh.noaa.gov/ohrfc//flows.shtml

Source

Ohio River @ Select Energy

Pleasants

Owner:

Select Energy

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude: 39.346473

-81.338727

9/15/2013

9/15/2014

6,600,000

9999998

Ohio River Station: Racine Dam

Max. Pump rate (gpm):

✓ Regulated Stream?

1,500

Ohio River Min. Flow

Min. Gauge Reading (cfs):

Ref. Gauge ID:

7,216.00

Min. Passby (cfs)

DEP Comments:

Refer to the specified station on the National Weather Service's Ohio River forecast

website: http://www.erh.noaa.gov/ohrfc//flows.shtml

Source

Middle Island Creek @ Travis Truck Pad

Doddridge

Owner:

Michael J. Travis

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

39.308545

Intake Latitude: Intake Longitude: -80.781102

9/15/2013

9/15/2014

6,600,000

3114500

MIDDLE ISLAND CREEK AT LITTLE, WV

☐ Regulated Stream?

Max. Pump rate (gpm):

4,200

Min. Gauge Reading (cfs):

Ref. Gauge ID:

72.16

Min. Passby (cfs)

28.33

Source Middle Island Creek @ Rock Run Doddridge Owner: illiam Whitehill Start Date **End Date** Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: 9/15/2013 9/15/2014 6,600,000 -80.760682 39.298763 Regulated Stream? Ref. Gauge ID: 3114500 MIDDLE ISLAND CREEK AT LITTLE, WV Max. Pump rate (gpm): Min. Gauge Reading (cfs): 62.89 1,680 Min. Passby (cfs) 26.43 **DEP Comments:** Middle Island Creek @ Barnes Withdrawal Site Source Doddridge Owner: Ellen L. Barnes Start Date **End Date** Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: 9/15/2013 6,600,000 39.29958 -80.75694 9/15/2014 ☐ Regulated Stream? Ref. Gauge ID: 3114500 MIDDLE ISLAND CREEK AT LITTLE, WV Max. Pump rate (gpm): 1,260 Min. Gauge Reading (cfs): 59.06 Min. Passby (cfs) 26.39 **DEP Comments:**

Regulated Stream? MIDDLE ISLAND CREEK AT LITTLE, WV Ref. Gauge ID: 3114500 Max. Pump rate (gpm): 1,260 Min. Gauge Reading (cfs): 74.77 Min. Passby (cfs) 9.26

Total Volume (gal)

6,600,000

Doddridge

Max. daily purchase (gal)

Owner:

DEP Comments:

End Date

9/15/2014

Meathouse Fork @ Spiker Withdrawal Site

Source

Start Date

9/15/2013

John & Sue Spiker

-80.72489

Intake Latitude: Intake Longitude:

39.2591

o Source	South Fork of I	Hughes Rive	er @ Upper Wizard Ru	n	Doddridge	Owner:	17-0	63 B. Morris
Start Date 9/15/2013	End Date 9/15/2014		Total Volume (gal) 6,600,000	Max. daily p	urchase (gal)		atitude: li 89998	ntake Longitude: - 80.79511
☐ Regulated	Stream?		Ref. Gauge II	D: 31552 2	20 GOUTH F	ORK HUGHES RIV	ER BELOW	MACFARLAN, W\
Max. Pump	rate (gpm):	1,260	Min. Gauge Read	ling (cfs):	33.12	Min. Pa	assby (cfs)	0.64
	DEP Commer	nts:						
S ource	South Fork of I	Hughes Rive	er @ Harmony Road		Doddridge	Owner:		I.L. Morris
Start Date 9/15/2013	End Date 9/15/2014		Total Volume (gal) 6,600,000	Max. daily p	urchase (gal)		atitude: li 1962	ntake Longitude: -80.81442
☐ Regulated	Stream?		Ref. Gauge II	D: 31552 2	20 GOUTH F	ORK HUGHES RIV	ER BELOW	MACFARLAN, W\
Max. Pump	rate (gpm):	1,260	Min. Gauge Read	ling (cfs):	33.12	Min. Pa	assby (cfs)	0.98
	DEP Commer	nts:						
o Source	Straight Fork @	∮ Maxson V	Vithdrawal Site		Ritchie	Owner:	Do	ouglas L. Maxson
Start Date 9/15/2013	End Date 9/15/2014		Total Volume (gal) 6,600,000	Max. daily p	urchase (gal)		atitude: II 44317	ntake Longitude: -80.848587
☐ Regulated	Stream?		Ref. Gauge I	D: 31552 2	20 GOUTH F	ORK HUGHES RIV	ER BELOW	MACFARLAN, W\
Max. Pump	rate (gpm):	1,680	Min. Gauge Read	ling (cfs):	36.74	Min. Pa	assby (cfs)	2.45

17-06331 Doddridge Middle Fork @ Janscheck Withdrawal Site Source Owner:

Start Date **End Date**

Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: 9/15/2013 9/15/2014 6,600,000 39.151388 -80.812222


☐ Regulated Stream? Ref. Gauge ID: 3155220 **JOUTH FORK HUGHES RIVER BELOW MACFARLAN, W**\

Max. Pump rate (gpm): Min. Gauge Reading (cfs): 35.81 Min. Passby (cfs) 0.86 1,260



WMP-01495 API/ID Number: 047-017-06331 Operator: **EQT Production Company** 513142 (OXF156H5) Ohio River @ Westbrook Trucking Site 26259 Source ID: Source Name Source Latitude: 39.384455 Stephen R. and Janet Sue Westbrook Source Longitude: -81.25645 HUC-8 Code: 5030201 9/15/2013 Anticipated withdrawal start date: Drainage Area (sq. mi.): 25000 County: **Pleasants** 9/15/2014 Anticipated withdrawal end date: **Endangered Species?** ✓ Mussel Stream? 6,600,000 Total Volume from Source (gal): Trout Stream? ☐ Tier 3? 1,260 Max. Pump rate (gpm): Ohio River Min. Flow Regulated Stream? Proximate PSD? Max. Simultaneous Trucks: Gauged Stream? Max. Truck pump rate (gpm) 9999999 Ohio River Station: Willow Island Lock & Dam Reference Gaug 25,000.00 6468 Drainage Area (sq. mi.) Gauge Threshold (cfs):

Month	Median monthly flow (cfs)	Threshold (+ pump	A	timated vailable ater (cfs)
1	45,700.00	12.		
2	49,200.00			-
3	65,700.00	-		-
4	56,100.00	-		
5	38,700.00	-		
6	24,300.00	+		1-1
7	16,000.00	141		
8	13,400.00	-		
9	12,800.00			
10	15,500.00	-		-
11	26,300.00			
12	41,300.00	16		-

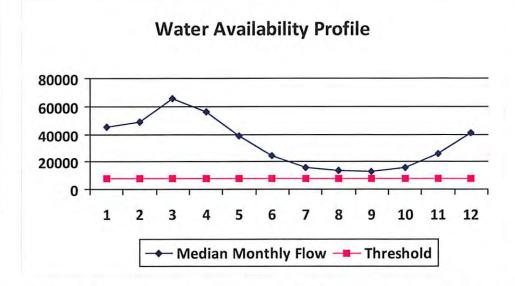

Min. Gauge Reading (cfs): Passby at Location (cfs):	
Ungauged Stream Safety (cfs):	1,617.00
Headwater Safety (cfs):	0.00
Pump rate (cfs):	2.81
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

WMP-01495 API/ID Number: 047-017-06331 Operator: **EQT Production Company** 513142 (OXF156H5) Source ID: 26260 Ohio River @ Select Energy Source Latitude: 39.346473 Source Name Select Energy Source Longitude: -81.338727 5030201 HUC-8 Code: 9/15/2013 Anticipated withdrawal start date: 25000 Pleasants Drainage Area (sq. mi.): County: 9/15/2014 Anticipated withdrawal end date: **Endangered Species?** ✓ Mussel Stream? 6,600,000 Total Volume from Source (gal): Trout Stream? ☐ Tier 3? Max. Pump rate (gpm): 1,500 Regulated Stream? Ohio River Min. Flow Max. Simultaneous Trucks: Proximate PSD? Max. Truck pump rate (gpm) Gauged Stream? 9999998 Ohio River Station: Racine Dam Reference Gaug 25,000.00 7216 Gauge Threshold (cfs): Drainage Area (sq. mi.)

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	50,956.00	2.0	-
2	54,858.00		4
3	73,256.00	-	
4	62,552.00	W.	
5	43,151.00	2.	1.2
6	27,095.00	-	
7	17,840.00	-	
8	14,941.00	*	
9	14,272.00	-	4
10	17,283.00		
11	29,325.00	-	4
12	46,050.00	4.	

Water Availability Profile Base Threshold (cfs): 80000 60000 Flow on this stream is regulated by the Army Corps of 40000 maintain the minimum guaranteed flow require 20000 1 2 3 5 6 8 9 10 11 12 7 Median Monthly Flow — Threshold

Water	Availability	Assessment	of	Location

Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	3.34
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

WMP-01495 API/ID Number: 047-017-06331 Operator: **EQT Production Company** 513142 (OXF156H5) 26261 Middle Island Creek @ Travis Truck Pad Source Latitude: 39.308545 Source ID: Source Name Michael J. Travis Source Longitude: -80.781102 5030201 HUC-8 Code: 9/15/2013 Anticipated withdrawal start date: Doddridge Drainage Area (sq. mi.): 122.83 County: 9/15/2014 Anticipated withdrawal end date: **Endangered Species?** ✓ Mussel Stream? 6,600,000 Total Volume from Source (gal): Trout Stream? ☐ Tier 3? Max. Pump rate (gpm): 4,200 Regulated Stream? Max. Simultaneous Trucks: 10 Proximate PSD? West Union Municipal Water Max. Truck pump rate (gpm) 420 Gauged Stream? MIDDLE ISLAND CREEK AT LITTLE, WV Reference Gaug 3114500 458.00 45 Gauge Threshold (cfs): Drainage Area (sq. mi.)

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	131.72	30.99	101.10
2	165.69	30.99	135.07
3	185.40	30.99	154.78
4	137.68	30.99	107.05
5	72.63	30.99	42.00
6	25.36	30.99	-5.26
7	14.35	30.99	-16.27
8	11.82	30.99	-18.81
9	6.05	30.99	-24.57
10	7.60	30.99	-23.02
11	37.14	30.99	6.51
12	90.73	30.99	60.11

Water Availability Profile 200 150 100 50 1 2 3 4 5 6 7 8 9 10 11 12 Median Monthly Flow Threshold

Base Threshold (cfs):	12.07
Upstream Demand (cfs):	6.55
Downstream Demand (cfs):	13.24
Pump rate (cfs):	9.36
Headwater Safety (cfs):	3.02
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	72.16
Passby at Location (cfs):	28.33

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.



WMP-01495

API/ID Number:

047-017-06331

Operator:

EQT Production Company

513142 (OXF156H5)

Source ID: 26262 Source Name Middle Island Creek @ Rock Run

Source Latitude: 39.298763

HUC-8 Code:

5030201

Drainage Area (sq. mi.):

107.35

County: D

Doddridge

Anticipated withdrawal start date:

9/15/2013

Anticipated withdrawal end date:

9/15/2014

✓ Endangered Species? ✓

Trout Stream?

✓ Mussel Stream?

Total Volume from Source (gal): 6,600,000

Source Longitude: -80.760682

Regulated Stream?

☐ Tier 3?

Max. Pump rate (gpm): 1,680

✓ Proximate PSD?

West Union Municipal Water

William Whitehill

Max. Simultaneous Trucks:

Max. Truck pump rate (gpm)

Gauged Stream?

Reference Gaug

3114500

MIDDLE ISLAND CREEK AT LITTLE, WV

45

420

Drainage Area	(sq.	mi.)

458.00

Estimated

Gauge Threshold (cfs):

45

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)	
1	115.12	19.74	95.58	
2	144.81	19.74	125.27	
3	162.04	19.74	142.50	
4	120.33	19.74	100.79	
5	63.47	19.74	43.93	
6	22.17	19.74	2.63	
7	12.54	19.74	-7.00	
8	10.33	19.74	-9.21	
9	5.29	19.74	-14.25	
10	6.65	19.74	-12.89	
11	32.46	19.74	12.91	
12	79.30	19.74	59.76	

Water Availability Profile 200 150 100 50 1 2 3 4 5 6 7 8 9 10 11 12 Median Monthly Flow Threshold

Base Threshold (cfs):	10.55
Upstream Demand (cfs):	2.81
Downstream Demand (cfs):	13.24
Pump rate (cfs):	3.74
Headwater Safety (cfs):	2.64
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	62.80
Passby at Location (cfs):	26.42

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

Source Detail



WMP-01495 API/ID Number: 047-017-06331 Operator: **EQT Production Company** 513142 (OXF156H5) Source ID: 26263 Source Name Middle Island Creek @ Barnes Withdrawal Site Source Latitude: 39.29958 Ellen L. Barnes Source Longitude: -80.75694 5030201 HUC-8 Code: Anticipated withdrawal start date: 9/15/2013 Doddridge 107.08 County: Drainage Area (sq. mi.): Anticipated withdrawal end date: 9/15/2014 **Endangered Species?** ✓ Mussel Stream? 6,600,000 Total Volume from Source (gal): Trout Stream? Tier 3? Max. Pump rate (gpm): 1,260 Regulated Stream? Max. Simultaneous Trucks: Proximate PSD? West Union Max. Truck pump rate (gpm) Gauged Stream? 3114500 MIDDLE ISLAND CREEK AT LITTLE, WV Reference Gaug 45 458.00 Gauge Threshold (cfs): Drainage Area (sq. mi.)

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	114.83	18.59	96.42
2	144.45	18.59	126.03
3	161.63	18.59	143.21
4	120.02	18.59	101.61
5	63.31	18.59	44.90
6	22.11	18.59	3.69
7	12.51	18.59	-5.91
8	10.30	18.59	-8.12
9	5.28	18.59	-13.14
10	6.63	18.59	-11.79
11	32.37	18.59	13.96
12	79.10	18.59	60.68

Water Availability Profile 200 150 100 50 1 2 3 4 5 6 7 8 9 10 11 12 Median Monthly Flow Threshold

Min. Gauge Reading (cfs): Passby at Location (cfs):	70.31 29.02
Ungauged Stream Safety (cfs):	2.63
Headwater Safety (cfs):	2.63
Pump rate (cfs):	2.81
Downstream Demand (cfs):	13.24
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	10.52

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

Max. Simultaneous Trucks: Max. Truck pump rate (gpm)

WMP-01495

API/ID Number:

047-017-06331

Operator:

Anticipated withdrawal end date:

Total Volume from Source (gal):

EQT Production Company

513142 (OXF156H5)

Doddridge

Source ID: 26264 Source Name Meathouse Fork @ Spiker Withdrawal Site Source Latitude: 39.2591

John & Sue Spiker Source Longitude: -80.72489

HUC-8 Code: 5030201

Anticipated withdrawal start date: 9/15/2013

Drainage Area (sq. mi.): 62.75 County: Endangered Species? ✓ Mussel Stream?

Regulated Stream?

Proximate PSD?

Gauged Stream?

Reference Gaug

3114500

MIDDLE ISLAND CREEK AT LITTLE, WV

Drainage Area (sq. mi.)

458.00

Gauge Threshold (cfs):

Max. Pump rate (gpm):

45

9/15/2014

6,600,000

1,260

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	67.29	16.52	51.09
2	84.65	16.52	68.45
3	94.72	16.52	78.52
4	70.34	16.52	54.14
5	37.10	16.52	20.90
6	12.96	16.52	-3.24
7	7.33	16.52	-8.87
8	6.04	16.52	-10.16
9	3.09	16.52	-13.11
10	3.88	16.52	-12.32
11	18.97	16.52	2.77
12	46.35	16.52	30.15

Water Availability Profile 100 80 60 40 20 0 1 2 3 4 5 6 7 8 9 10 11 12 Median Monthly Flow Threshold

Water	Availability	Assessment	of	Location

Min. Gauge Reading (cfs): Passby at Location (cfs):	74.77 9.25
Ungauged Stream Safety (cfs):	1.54
Headwater Safety (cfs):	1.54
Pump rate (cfs):	2.81
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	4.46
Base Threshold (cfs):	6.17

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.


Source Detail

17-66331

WMP-01495 API/ID Number: 047-017-06331 Operator: **EQT Production Company** 513142 (OXF156H5) Source Name South Fork of Hughes River @ Upper Wizard Run Source ID: 26265 Source Latitude: 39.189998 I.L. Morris Source Longitude: -80.79511 5030203 HUC-8 Code: 9/15/2013 Anticipated withdrawal start date: Doddridge Drainage Area (sq. mi.): 5.33 County: Anticipated withdrawal end date: 9/15/2014 **Endangered Species?** ✓ Mussel Stream? 6,600,000 Total Volume from Source (gal): Trout Stream? ☐ Tier 3? 1,260 Max. Pump rate (gpm): Regulated Stream? Max. Simultaneous Trucks: Proximate PSD? Max. Truck pump rate (gpm) Gauged Stream? SOUTH FORK HUGHES RIVER BELOW MACFARLAN, WV 3155220 Reference Gaug 22 229.00 Gauge Threshold (cfs): Drainage Area (sq. mi.)

Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	14.97	6.26	8.79
2	19.52	6.26	13.33
3	21.37	6.26	15.19
4	12.08	6.26	5.90
5	8.48	6.26	2.29
6	4.56	6.26	-1.63
7	2.26	6.26	-3.93
8	1.31	6.26	-4.88
9	1.57	6.26	-4.62
10	1.70	6.26	-4.48
11	5.09	6.26	-1.09
12	10.51	6.26	4.32

Water Availability Profile

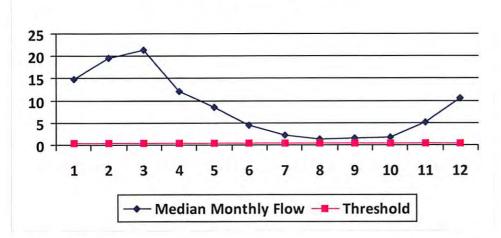

Water Availability Assessment of Location

Min. Gauge Reading (cfs):	33.12
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	0.13
Pump rate (cfs):	2.81
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	2.81
Base Threshold (cfs):	0.51

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

Max. Truck pump rate (gpm)

WMP-01495 API/ID Number: 047-017-06331 Operator: **EQT Production Company** 513142 (OXF156H5) Source ID: 26266 South Fork of Hughes River @ Harmony Road Source Name Source Latitude: 39.1962 I.L. Morris Source Longitude: -80.81442 5030203 HUC-8 Code: Anticipated withdrawal start date: 9/15/2013 Drainage Area (sq. mi.): 8.1 County: Doddridge Anticipated withdrawal end date: 9/15/2014 **Endangered Species?** ✓ Mussel Stream? Total Volume from Source (gal): 6,600,000 Trout Stream? Tier 3? 1,260

Regulated Stream? Max. Pump rate (gpm): 1,


Proximate PSD? Max. Simultaneous Trucks:

Reference Gaug 3155220 SOUTH FORK HUGHES RIVER BELOW MACFARLAN, WV

Drainage Area (sq. mi.) 229.00 Gauge Threshold (cfs): 22

Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	22.75	6.59	16.28
2	29.66	6.59	23.19
3	32.48	6.59	26.01
4	18.36	6.59	11.89
5	12.88	6.59	6.41
6	6.92	6.59	0.45
7	3.43	6.59	-3.04
8	1.98	6.59	-4.49
9	2.38	6.59	-4.09
10	2.59	6.59	-3.88
11	7.74	6.59	1.27
12	15.97	6.59	9.50

Water Availability Profile

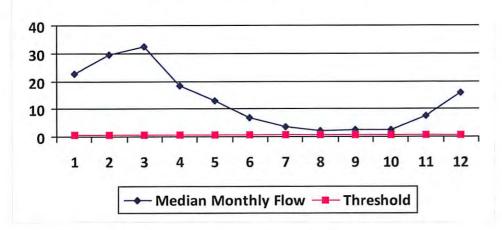

Water Availability Assessment of Location

Min. Gauge Reading (cfs): Passby at Location (cfs):	33.12 0.97
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	0.19
Pump rate (cfs):	2.81
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	2.81
Base Threshold (cfs):	0.78

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

✓ Gauged Stream?

WMP-01495 API/ID Number: 047-017-06331 Operator: **EQT Production Company** 513142 (OXF156H5) Source ID: 26267 Straight Fork @ Maxson Withdrawal Site Source Latitude: 39.144317 Source Name Douglas L. Maxson Source Longitude: -80.848587 HUC-8 Code: 5030203 9/15/2013 Anticipated withdrawal start date: Drainage Area (sq. mi.): 16.99 Ritchie County: Anticipated withdrawal end date: 9/15/2014 ✓ Mussel Stream? **Endangered Species?** 6,600,000 Total Volume from Source (gal): Trout Stream? ☐ Tier 3? Max. Pump rate (gpm): 1,680 Regulated Stream? Max. Simultaneous Trucks: Proximate PSD? Max. Truck pump rate (gpm) 420 Gauged Stream?

Drainage Area (sq	j. mi.) 22	9.00	Gauge Threshold (cfs):	22
Median monthly flow	Threshold	Estimated Available		

SOUTH FORK HUGHES RIVER BELOW MACFARLAN, WV

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	47.72	6.19	41.62
2	62.22	6.19	56.12
3	68.13	6.19	62.04
4	38.52	6.19	32.42
5	27.03	6.19	20.93
6	14.52	6.19	8.42
7	7.20	6.19	1.10
8	4.16	6.19	-1.94
9	5.00	6.19	-1.10
10	5.43	6.19	-0.67
11	16.23	6.19	10.13
12	33.50	6.19	27.40

3155220

Reference Gaug

Water Availability Profile 80 60 40 20 1 2 3 4 5 6 7 8 9 10 11 12 Median Monthly Flow Threshold

Water Availability Assessment of Location

Min. Gauge Reading (cfs): Passby at Location (cfs):	36.74
Ungauged Stream Safety (cfs):	0.41
Headwater Safety (cfs):	0.41
Pump rate (cfs):	3.74
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	1.63

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.



WMP-01495 API/ID Number: 047-017-06331 Operator: **EQT Production Company** 513142 (OXF156H5) Source ID: 26268 Middle Fork @ Janscheck Withdrawal Site Source Name Source Latitude: 39.151388 Mary Jo Janscheck Source Longitude: -80.812222 5030203 HUC-8 Code: 9/15/2013 Anticipated withdrawal start date: 5.92 . Drainage Area (sq. mi.): Doddridge County: Anticipated withdrawal end date: 9/15/2014 **Endangered Species?** ✓ Mussel Stream? 6,600,000 Total Volume from Source (gal): Trout Stream? ☐ Tier 3? 1,260 Max. Pump rate (gpm): Regulated Stream? Max. Simultaneous Trucks: Proximate PSD? Max. Truck pump rate (gpm) Gauged Stream? 3155220 SOUTH FORK HUGHES RIVER BELOW MACFARLAN, WV Reference Gaug 229.00 Gauge Threshold (cfs): 22 Drainage Area (sq. mi.)

Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	16.63	3.66	13.10
2	21.68	3.66	18.15
3	23.74	3.66	20.21
4	13.42	3.66	9.89
5	9.42	3.66	5.88
6	5.06	3.66	1.53
7	2.51	3.66	-1.02
8	1.45	3.66	-2.08
9	1.74	3.66	-1.79
10	1.89	3.66	-1.64
11	5.66	3.66	2.12
12	11.67	3.66	8.14

Water Availability Profile 25 20 15 10 5 1 2 3 5 6 7 8 9 10 11 12 Median Monthly Flow — Threshold

D - T - L - L (- C)	0.57
Base Threshold (cfs):	0.57
Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	2.81
Headwater Safety (cfs):	0.14
Ungauged Stream Safety (cfs):	0.14
Min. Gauge Reading (cfs):	35.81
Passby at Location (cfs):	0.85

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

west virginia department of environmental protection



Water Management Plan: Secondary Water Sources



WMP-01494

API/ID Number

047-017-06330

Operator:

EQT Production Company

513141 (OXF156H4)

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Ground Water

Source ID: 26255 Source Name Groundwater Well TW#1

Source start date:

Source end date:

9/15/2013

9/15/2014

Source Lat:

39.56059

Source Long:

-80.56027

County

Wetzel

Max. Daily Purchase (gal)

Total Volume from Source (gal):

8,300,000

WMP-01494

API/ID Number

047-017-06330

Operator:

EQT Production Company

513141 (OXF156H4)

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Lake/Reservior

Source ID: 26256 Source Name

Pennsboro Lake

Source start date:

9/15/2013

Source end date:

9/15/2014

Source Lat:

39.281689

Source Long:

-80.925526

County

Ritchie

Max. Daily Purchase (gal)

Total Volume from Source (gal):

8,300,000

WMP-01494

API/ID Number

047-017-06330

Operator:

EQT Production Company

513141 (OXF156H4)

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Multi-site impoundment

Davies Centralized Freshwater Impoundment Source ID: 26257 Source Name

Source start date:

9/15/2013

Source end date:

9/15/2014

Source Lat:

39.269635

Source Long:

-80.77711 County Doddridge

Max. Daily Purchase (gal)

Total Volume from Source (gal):

8,300,000

DEP Comments:

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-1083

Source ID: 27403 Source Name

OXF149 Tank Pad A

Source start date:

9/15/2013

Source end date:

9/15/2014

Source Lat:

39.221932

Source Long:

-80.799873

County

Doddridge

Max. Daily Purchase (gal)

Total Volume from Source (gal):

8,300,000

DEP Comments:

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-1532

WMP-01494

API/ID Number

047-017-06330

Operator:

EQT Production Company

513141 (OXF156H4)

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 27404 Source Name

OXF149 Tank Pad B

Source start date:

9/15/2003

Source end date:

9/15/2014

Source Lat:

39.221733

Source Long:

-80.798991 County Doddridge

Max. Daily Purchase (gal)

Total Volume from Source (gal):

8,300,000

DEP Comments:

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-1533

Recycled Frac Water

Source ID: 26258 Source Name

Various

9/15/2013

Source end date:

Source start date:

9/15/2014

8,300,000

Source Lat:

Source Long:

County

Max. Daily Purchase (gal)

Total Volume from Source (gal):

