

**STATE OF WEST VIRGINIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION
OFFICE OF OIL AND GAS**

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE IN TRIPLICATE, one copy mailed to the Department, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

Farm name: MarkWest Liberty Midstream Operator Well No.: MW-01

LOCATION: Elevation: 923' Quadrangle: Smithburg
District: West Union County: Doddridge
Latitude: 854 Feet South of 39 Deg. 17 Min. 00 Sec.
Longitude: 995 Feet West of 80 Deg. 43 Min. 30 Sec.

RECEIVED
Office of Oil and Gas

SEP 21 2018

Well Type: OIL _____ GAS X

Company Stalnaker Energy Coal Operator _____ WV Department of
P.O. Box 178 or Owner _____ Environmental Protection
Glennville, WV 26351
Agent Ron Stalnaker Coal Operator _____
Permit Issued Date 7/27/2018 or Owner _____

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of Gilmer ss:

Jason Miller and Kevin Hartleroad being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by the above named well operator, and participated in the work of plugging and filling the above well say that said work was commenced on the 24th day of August, 2018, and the well was plugged and filled in the following manner:


TYPE	FROM	TO	PIPE REMOVED	LEFT
2", 10 round	2280'	Surface	Shot off at 1410' per DEP approval.	870'
7"	1410' +	Surface	0'	1410' +, Perforated at Elevation
Ran 2 3/8" to 1410'	Load hole with 74 bbl	of 6% Gel		
Pump 50 SKS	Class A	From 1390' to 1143'	Wait on Cement, Tag Plug with Tubing	
Pump 50 SKS	Class A	From 974' to 721'	Wait on Cement, Tag Plug with Tubing	
Pump 104 SKS	Class A	294' to 0'	Set Monument	

Description of monument: 7" Casing with API number welded on metal plate. and that the work of plugging and filling said well was completed on the 29th day of August, 2018.

And further deponents saith not. Jason Miller
Kevin Hartleroad

Sworn and subscribe before me this 19th day of September, 2018

My commission expires July 18, 2019

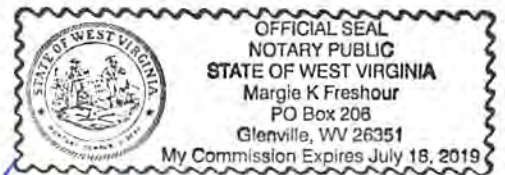

Margie K Freshour
Notary Public

Affidavit reviewed by the Office of Oil and Gas: [Signature] Title: Oil & Gas Inspector

12/28/2018