

west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax Earl Ray Tomblin, Governor Randy C. Huffman, Cabinet Secretary www.dep.wv.gov

October 28, 2013

WELL WORK PERMIT

Horizontal 6A Well

This permit, API Well Number: 47-1706380, issued to ANTERO RESOURCES CORPORATION, is evidence of permission granted to perform the specified well work at the location described on the attached pages and located on the attached plat, subject to the provisions of Chapter 22 of the West Virginia Code of 1931, as amended, and all rules and regulations promulgated thereunder, and to all conditions and provisions outlined in the pages attached hereto. Notification shall be given by the operator to the Oil and Gas Inspector at least 24 hours prior to the construction of roads, locations, and/or pits for any permitted work. In addition, the well operator shall notify the same inspector 24 hours before any actual well work is commenced and prior to running and cementing casing. Spills or emergency discharges must be promptly reported by the operator to 1-800-642-3074 and to the Oil and Gas inspector.

Please be advised that form WR-35, Well Operators Report of Well Work is to be submitted to this office within 90 days completion of permitted well work, as should form WR-34 Discharge Monitoring Report within 30 days of discharge of pits, if applicable. Failure to abide by all statutory and regulatory provisions governing all duties and operations hereunder may result in suspension or revocation of this permit and, in addition, may result in civil and/or criminal penalties being imposed upon the operators.

In addition to the applicable requirements of this permit, and the statutes and rules governing oil and gas activity in WV, this permit may contain specific conditions which must be followed. Permit conditions are attached to this cover letter.

Per 35CSR-4-5.2.g this permit will expire in two (2) years from the issue date unless permitted well work is commenced. If there are any questions, please feel free to contact me at (304) 926-0499 ext. 1654.

James Martin

Chief

Operator's Well No: RICHARD UNIT 2H

Farm Name: NELSON, ERIC E. .. ET AL

API Well Number: 47-1706380

Permit Type: Horizontal 6A Well

Date Issued: 10/28/2013

PERMIT CONDITIONS

West Virginia Code § 22-6A-8(d) allows the Office of Oil and Gas to place specific conditions upon this permit. Permit conditions have the same effect as law. Failure to adhere to the specified permit conditions may result in enforcement action.

CONDITIONS

- 1. This proposed activity may require permit coverage from the United States Army Corps of Engineers (USACOE). Through this permit, you are hereby being advised to consult with USACOE regarding this proposed activity.
- 2. If the operator encounters an unanticipated void, or an anticipated void at an unanticipated depth, the operator shall notify the inspector within 24 hours. Modifications to the casing program may be necessary to comply with W. Va. Code § 22-6A-5a (12), which requires drilling to a minimum depth of thirty feet below the bottom of the void, and installing a minimum of twenty (20) feet of casing. Under no circumstance should the operator drill more than fifty (50) feet below the bottom of the void or install less than twenty (20) feet of casing below the bottom of the void.
- 3. When compacting fills, each lift before compaction shall not be more than 12 inches in height, and the fill material shall be within plus or minus 2% of the optimum moisture content as determined by the standard proctor density test, ASTM D698, Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort. Each lift must meet 95 % compaction of the optimum density based on results from the standard proctor density test of the actual soils used in specific engineered fill sites. Each lift shall be tested for compaction, with a minimum of two tests per lift per acre of fill. All test results shall be maintained on site and available for review.
- 4. Operator shall install signage per § 22-6A-8g (6) (B) at all source water locations included in their approved water management plan within 24 hours of water management plan activation.
- 5. Oil and gas water supply wells will be registered with the Office of Oil and Gas and all such wells will be constructed and plugged in accordance with the standards of the Bureau for Public Health set forth in its Legislative rule entitled *Water Well Regulations*, 64 C.S.R. 19. Operator is to contact the Bureau of Public Health regarding permit requirements. In lieu of plugging, the operator may transfer the well to the surface owner upon agreement of the parties. All drinking water wells within fifteen hundred feet of the water supply well shall be flow tested by the operator upon request of the drinking well owner prior to operating the water supply well.
- 6. Pursuant to the requirements pertaining to the sampling of domestic water supply wells/springs the operator shall, no later than thirty (30) days after receipt of analytical data provide a written copy to the Chief and any of the users who may have requested such analyses.
- 7. If any explosion or other accident causing loss of life or serious personal injury occurs in or about a well or well work on a well, the well operator or its contractor shall give notice, stating the particulars of the explosion or accident, to the oil and gas inspector and the Chief, within 24 hours of said accident.
- 8. During the casing and cementing process, in the event cement does not return to the surface, the oil and gas inspector shall be notified within 24 hours.

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS WELL WORK PERMIT APPLICATION

2) Operator's Well Number: Research Unit 2H	1) Well Operator:	Antero	Resources	Corporation	494488557	017-Doddridge	Greenbrier	Big Isaac 7.5'
Altero pins to be disturbed, including roads, stockpile area, pits, etc., (acres): Selevation, current ground: -1360' Elevation, proposed post-construction: 1331'					Operator ID	County	District	Quadrangle
Allow Deep Oil Underground Storage Other (b) If Gas: Shallow Deep Other (b) If Gas: Shallow Other (b) If Gas: Shallow Other (b) If Gas: Other (b) If Gas: Shallow Other (b) If Gas: Other (c) If Gas	2) Operator's Well	Number:	Richard Un	it 2H		Well Pad Nam	e; Hughes Pad	9
Other (b) If Gas: Shallow Horizontal Deep Horizontal Proposed Target Formation(s), Depth(s), Anticipated Thicknesses and Associated Pressure(s): Marcallus Shale: 7,500' TVD, Anticipated Thicknesses and Associated Pressure(s): Marcallus Shale: 7,500' TVD, Anticipated Thicknesses and Associated Pressure(s): Marcallus Shale: 7,500' TVD, Anticipated Thicknesses 60 Fout, Associated Pressure- 3250# 7) Proposed Total Vertical Depth: 7,500' TVD 8) Formation at Total Vertical Depth: Marcallus P) Proposed Total Measured Depth: 15,400' MD 10) Approximate Fresh Water Strata Depths: 125,472' 11) Method to Determine Fresh Water Depth: Offset well records. Depths have been adjusted according to surface elevations. 12) Approximate Saltwater Depths: 545, 1952' 13) Approximate Coal Seam Depths: 407, 727' 14) Approximate Depth to Possible Void (coal mine, karst, other): None anticipated 15) Does proposed well location contain coal seams directly overlying or adjacent to an active mine? If so, indicate name and depth of mine: No 16) Describe proposed well work: Dill, perforate, fracture a new horizontal shallow well and complete Marcallus Shale Antero will be air drilling the freen water string which makes a difficult to determine when freshwater is encountered, therefore we have built in a buffer for the casing setting depth which holps to ensure that all fresh water zones are covered. Antero pians to pump Slickwalar into the Marcallus Shale termation in order to ready the well for production. The fluid will be comprised of approximately 99 percent water and sand, with less than 1 percent special-purpose additives as shown in the attached "List of Anticipated Additives Used for Fracturing or Stimulating Well." Received Office of Oil & Casa 18) Total area to be disturbed, including roads, stockpile area, pits, etc., (acres): 16, 16, 16 acres	3 Elevation, curren	t ground	~1360'	Ele	evation, proposed	post-construc	tion: 1	331'
Bornation Born	4) Well Type: (a) (Gas		Oil	Undergroun	d Storage		y
6) Proposed Target Formation(s), Depth(s), Anticipated Thicknesses and Associated Pressure(s): Marcellus Shale: 7.500 TVD, Anticipated Thickness-60 Feet, Associated Pressure- 3250# 7) Proposed Total Vertical Depth: 7,500 TVD 8) Formation at Total Vertical Depth: 9) Proposed Total Measured Depth: 15,400 MD 10) Approximate Fresh Water Strata Depths: 125'. 472' 11) Method to Determine Fresh Water Depth: Offset well records. Depths have been adjusted according to surface elevations. 12) Approximate Saltwater Depths: 407', 727' 14) Approximate Coal Seam Depths: 407', 727' 14) Approximate Depth to Possible Void (coal mine, karst, other): None anticipated No 16) Describe proposed well location contain coal seams directly overlying or adjacent to an active mine? If so, indicate name and depth of mine: 16) Describe proposed well work: Polili, perforate, fracture a new horizontal shallow well and complete Marcellus Shale Antero will be air drilling the fresh water string which makes it difficult to determine when freshwater is encountered, therefore we have built in a buffer for the casing setting depth which helps to ensure that all fresh water zones are covered. 17) Describe fracturing/stimulating methods in detail: Antero plans to pump Slickwater into the Marcellus Shale formation in order to ready the well for production. The fluid will be comprised of approximately 99 percent water and sand, with less than 1 percent special-purpose additives as shown in the attached "List of Anticipated Additives Used for Fracturing or Stimulating Well." Received Office of Oil & Gas 8) Total area to be disturbed, including roads, stockpile area, pits, etc, (acres): 16.51 acres		Other						
6) Proposed Target Formation(s), Depth(s), Anticipated Thicknesses and Associated Pressure(s): Marcellus Shale: 7.500 TVD, Anticipated Thickness-60 Foet, Associated Pressure- 3250# 7) Proposed Total Vertical Depth: 7,500 TVD 8) Formation at Total Vertical Depth: 15,400 MD 10) Approximate Fresh Water Strata Depths: 125'. 472' 11) Method to Determine Fresh Water Depth: Offset well records. Depths have been adjusted according to surface elevations. 12) Approximate Saltwater Depths: 407', 727' 13) Approximate Coal Seam Depths: 407', 727' 14) Approximate Depth to Possible Void (coal mine, karst, other): None anticipated No 16) Describe proposed well location contain coal seams directly overlying or adjacent to an active mine? If so, indicate name and depth of mine: Antero will be air drilling the fresh water string which makes it difficult to determine when freshwater is encountered, therefore we have built in a buffer for the casing setting depth which helps to ensure that all fresh water zones are covered. 17) Describe fracturing/stimulating methods in detail: Antero plans to pump Slickwater into the Marcellus Shale formation in order to ready the well for production. The fluid will be comprised of approximately 99 percent water and sand, with less than 1 percent special-purpose additives as shown in the attached "List of Anticipated Additives Used for Fracturing or Stimulating Well." Received Office of Oil & Gas 16:51 acres	(b) I:	f Gas:	Shallow		Deep			001
6) Proposed Target Formation(s), Depth(s), Anticipated Thicknesses and Associated Pressure(s): Marcellus Shale: 7.500 TVD, Anticipated Thickness-60 Foet, Associated Pressure- 3250# 7) Proposed Total Vertical Depth: 7,500 TVD 8) Formation at Total Vertical Depth: 15,400 MD 10) Approximate Fresh Water Strata Depths: 125'. 472' 11) Method to Determine Fresh Water Depth: Offset well records. Depths have been adjusted according to surface elevations. 12) Approximate Saltwater Depths: 407', 727' 13) Approximate Coal Seam Depths: 407', 727' 14) Approximate Depth to Possible Void (coal mine, karst, other): None anticipated No 16) Describe proposed well location contain coal seams directly overlying or adjacent to an active mine? If so, indicate name and depth of mine: Antero will be air drilling the fresh water string which makes it difficult to determine when freshwater is encountered, therefore we have built in a buffer for the casing setting depth which helps to ensure that all fresh water zones are covered. 17) Describe fracturing/stimulating methods in detail: Antero plans to pump Slickwater into the Marcellus Shale formation in order to ready the well for production. The fluid will be comprised of approximately 99 percent water and sand, with less than 1 percent special-purpose additives as shown in the attached "List of Anticipated Additives Used for Fracturing or Stimulating Well." Received Office of Oil & Gas 16:51 acres			Horizontal					1)
6) Proposed Target Formation(s), Depth(s), Anticipated Thicknesses and Associated Pressure(s): Marcellus Shale: 7.500 TVD, Anticipated Thickness-60 Foet, Associated Pressure- 3250# 7) Proposed Total Vertical Depth: 7,500 TVD 8) Formation at Total Vertical Depth: 15,400 MD 10) Approximate Fresh Water Strata Depths: 125'. 472' 11) Method to Determine Fresh Water Depth: Offset well records. Depths have been adjusted according to surface elevations. 12) Approximate Saltwater Depths: 407', 727' 13) Approximate Coal Seam Depths: 407', 727' 14) Approximate Depth to Possible Void (coal mine, karst, other): None anticipated No 16) Describe proposed well location contain coal seams directly overlying or adjacent to an active mine? If so, indicate name and depth of mine: Antero will be air drilling the fresh water string which makes it difficult to determine when freshwater is encountered, therefore we have built in a buffer for the casing setting depth which helps to ensure that all fresh water zones are covered. 17) Describe fracturing/stimulating methods in detail: Antero plans to pump Slickwater into the Marcellus Shale formation in order to ready the well for production. The fluid will be comprised of approximately 99 percent water and sand, with less than 1 percent special-purpose additives as shown in the attached "List of Anticipated Additives Used for Fracturing or Stimulating Well." Received Office of Oil & Gas 16:51 acres	5) Existing Pad? Ye	s or No:	No					9-30
8) Formation at Total Vertical Depth: 15,400' MD 10) Approximate Fresh Water Strata Depths: 11) Method to Determine Fresh Water Depth: 12) Approximate Saltwater Depths: 13) Approximate Coal Seam Depths: 14) Approximate Coal Seam Depths: 15) Does proposed well location contain coal seams directly overlying or adjacent to an active mine? If so, indicate name and depth of mine: 16) Describe proposed well work: 17) Describe proposed well work: 18) Describe proposed well work: 19 Describe proposed well work: 20 Drill, perforate, fracture a new horizontal shallow well and complete Marcellus Shale 2 Antero will be air drilling the fresh water string which makes it difficult to determine when freshwater is encountered, therefore we have built in a buffer for the casing setting depth which helps to ensure that all frosh water zones are covered. 17) Describe fracturing/stimulating methods in detail: 2 Antero plans to pump Silckwater into the Marcellus Shale formation in order to ready the well for production. The fluid will be comprised of approximately 99 percent water and sand, with less than 1 percent special-purpose additives us shown in the attached "List of Anticipated Additives Used for Fracturing or Stimulating Well." Received 18) Total area to be disturbed, including roads, stockpile area, pits, etc, (acres): 16.51 acres						d Associated	Pressure(s):	- 1
9) Proposed Total Measured Depth: 15,400° MD 10) Approximate Fresh Water Strata Depths: 125′, 472′ 11) Method to Defermine Fresh Water Depth: Offset well records. Depths have been adjusted according to surface elevations. 12) Approximate Saltwater Depths: 545′, 1952′ 13) Approximate Coal Seam Depths: 407′, 727′ 14) Approximate Depth to Possible Void (coal mine, karst, other): None anticipated 15) Does proposed well location contain coal seams directly overlying or adjacent to an active mine? If so, indicate name and depth of mine: No 16) Describe proposed well work: Drill, perforate, fracture a new horizontal shallow well and complete Marcellus Shale *Antero will be air drilling the fresh water string which makes it difficult to determine when freshwater is encountered, therefore we have built in a buffer for the casing setting depth which helps to ensure that all fresh water zones are covered. 17) Describe fracturing/stimulating methods in detail: Antero plans to pump Slickwater into the Marcellus Shale formation in order to ready the well for production. The fluid will be comprised of approximately 99 percent water and sand, with less than 1 percent special-purpose additives as shown in the attached "List of Anticipated Additives Used for Fracturing or Stimulating Well." **Raceived** Office of Oil & Gas** 16.51 acres 16.51 acres	7) Proposed Total V	ertical D	epth:	7,500' TVD				
10) Approximate Fresh Water Strata Depths: 125, 472' Offset well records. Depths have been adjusted according to surface elevations. 12) Approximate Saltwater Depths: 13) Approximate Coal Seam Depths: 407, 727' 14) Approximate Depth to Possible Void (coal mine, karst, other): None anticipated 15) Does proposed well location contain coal seams directly overlying or adjacent to an active mine? If so, indicate name and depth of mine: 16) Describe proposed well work: Prill, perforate, fracture a new horizontal shallow well and complete Marcellus Shale *Antero will be air drilling the fresh water string which makes it difficult to determine when freshwater is encountered, therefore we have built in a buffer for the casing setting depth which helps to ensure that all fresh water zones are covered. 17) Describe fracturing/stimulating methods in detail: Antero plans to pump Slickwater into the Marcellus Shale formation in order to ready the well for production. The fluid will be comprised of approximately 99 percent water and sand, with less than 1 percent special-purpose additives as shown in the attached "List of Anticipated Additives Used for Fracturing or Stimulating Well." Received Office of Oil & Gas 8) Total area to be disturbed, including roads, stockpile area, pits, etc, (acres): 16,51 acres	8) Formation at Total	al Vertica	al Depth:	Marcellus				
11) Method to Determine Fresh Water Depth: Offset well records. Depths have been adjusted according to surface elevations. 12) Approximate Saltwater Depths: 407', 727' 14) Approximate Depth to Possible Void (coal mine, karst, other): None anticipated No adjacent to an active mine? If so, indicate name and depth of mine: Prill, perforate, fracture a new horizontal shallow well and complete Marcellus Shale *Antero will be air drilling the fresh water string which makes it difficult to determine when freshwater is encountered, therefore we have built in a buffer for the casing setting depth which helps to ensure that all fresh water zones are covered. 17) Describe fracturing/stimulating methods in detail: Antero plans to pump Slickwater into the Marcellus Shale formation in order to ready the well for production. The fluid will be comprised of approximately 99 percent water and sand, with less than 1 percent special-purpose additives as shown in the attached "List of Anticipated Additives Used for Fracturing or Stimulating Well." Received Office of Oil & Gas 18) Total area to be disturbed, including roads, stockpile area, pits, etc, (acres): 110.	9) Proposed Total M	1easured	Depth:	15,400' MD				
12) Approximate Saltwater Depths: 13) Approximate Coal Seam Depths: 14) Approximate Depth to Possible Void (coal mine, karst, other): 15) Does proposed well location contain coal seams directly overlying or adjacent to an active mine? If so, indicate name and depth of mine: 16) Describe proposed well work: 17) Describe proposed well work: 18) Describe proposed well work: 19 19 20 21 21 21 21 21 21 21 21 21	10) Approximate Fr	esh Wate	er Strata Dej	oths: 125	5', 472'			
Approximate Coal Seam Depths: 407', 727' 14) Approximate Depth to Possible Void (coal mine, karst, other): None anticipated 15) Does proposed well location contain coal seams directly overlying or adjacent to an active mine? If so, indicate name and depth of mine: 16) Describe proposed well work: Drill, perforate, fracture a new horizontal shallow well and complete Marcellus Shale *Antero will be air drilling the fresh water string which makes it difficult to determine when freshwater is encountered, therefore we have built in a buffer for the casing setting depth which helps to ensure that all fresh water zones are covered. 17) Describe fracturing/strimulating methods in detail: Antero plans to pump Slickwater into the Marcellus Shale formation in order to ready the well for production. The fluid will be comprised of approximately 99 percent water and sand, with less than 1 percent special-purpose additives as shown in the attached "List of Anticipated Additives Used for Fracturing or Stimulating Well." Received Office of Oil & Gas 18) Total area to be disturbed, including roads, stockpile area, pits, etc, (acres): 16.51 acres	11) Method to Deter	rmine Fre	esh Water D	epth: of	fset well records. Depths h	nave been adjusted a	ccording to surface	elevations.
14) Approximate Depth to Possible Void (coal mine, karst, other): None anticipated No adjacent to an active mine? If so, indicate name and depth of mine: Drill, perforate, fracture a new horizontal shallow well and complete Marcellus Shale *Antero will be air drilling the fresh water string which makes it difficult to determine when freshwater is encountered, therefore we have built in a buffer for the casing setting depth which helps to ensure that all fresh water zones are covered. 17) Describe fracturing/stimulating methods in detail: Antero plans to pump Slickwater into the Marcellus Shale formation in order to ready the well for production. The fluid will be comprised of approximately 99 percent water and sand, with less than 1 percent special-purpose additives as shown in the attached "List of Anticipated Additives Used for Fracturing or Stimulating Well." Received Office of Oil & Gas 16.51 acres	12) Approximate Sa	ltwater I	Depths:	545', 1952'				
15) Does proposed well location contain coal seams directly overlying or adjacent to an active mine? If so, indicate name and depth of mine: 16) Describe proposed well work: 17) Describe fracturing/stimulating methods in detail: Antero plans to pump Slickwater into the Marcellus Shale formation in order to ready the well for production. The fluid will be comprised of approximately 99 percent water and sand, with less than 1 percent special-purpose additives as shown in the attached "List of Anticipated Additives Used for Fracturing or Stimulating Well." 18) Total area to be disturbed, including roads, stockpile area, pits, etc, (acres): 19) Describe fracturing or Stimulating or Stimulating well." 10) Received Office of Oil & Gas	13) Approximate Co	al Seam	Depths:	407', 727'				
adjacent to an active mine? If so, indicate name and depth of mine: 16 Describe proposed well work: Drill, perforate, fracture a new horizontal shallow well and complete Marcellus Shale *Antero will be air drilling the fresh water string which makes it difficult to determine when freshwater is encountered, therefore we have built in a buffer for the casing setting depth which helps to ensure that all fresh water zones are covered. 17 Describe fracturing/stimulating methods in detail: Antero plans to pump Slickwater into the Marcellus Shale formation in order to ready the well for production. The fluid will be comprised of approximately 99 percent water and sand, with less than 1 percent special-purpose additives as shown in the attached "List of Anticipated Additives Used for Fracturing or Stimulating Well." Received Office of Oil & Gas	14) Approximate De	epth to Po	ossible Voic	l (coal mine, k	carst, other):	None anticip	pated	
*Antero will be air drilling the fresh water string which makes it difficult to determine when freshwater is encountered, therefore we have built in a buffer for the casing setting depth which helps to ensure that all fresh water zones are covered. 17) Describe fracturing/stimulating methods in detail: Antero plans to pump Slickwater into the Marcellus Shale formation in order to ready the well for production. The fluid will be comprised of approximately 99 percent water and sand, with less than 1 percent special-purpose additives as shown in the attached "List of Anticipated Additives Used for Fracturing or Stimulating Well." Received Office of Oil & Gas 16.51 acres						or No		
setting depth which helps to ensure that all fresh water zones are covered. 17) Describe fracturing/stimulating methods in detail: Antero plans to pump Slickwater into the Marcellus Shale formation in order to ready the well for production. The fluid will be comprised of approximately 99 percent water and sand, with less than 1 percent special-purpose additives as shown in the attached "List of Anticipated Additives Used for Fracturing or Stimulating Well." Received Office of Oil & Gas 18) Total area to be disturbed, including roads, stockpile area, pits, etc, (acres): 16.51 acres	Describe propos	ed well w	work:	rill, perforate, fractu	re a new horizontal shallov	w well and complete	Marcellus Shale	
Antero plans to pump Slickwater into the Marcellus Shale formation in order to ready the well for production. The fluid will be comprised of approximately 99 percent water and sand, with less than 1 percent special-purpose additives as shown in the attached "List of Anticipated Additives Used for Fracturing or Stimulating Well." Received Office of Oil & Gas 8) Total area to be disturbed, including roads, stockpile area, pits, etc, (acres): 16.51 acres	*Antero will be air drilling th	e fresh water	string which make	s it difficult to determine	ne when freshwater is enco	untered, therefore we	have built in a buffer	for the casing
Antero plans to pump Slickwater into the Marcellus Shale formation in order to ready the well for production. The fluid will be comprised of approximately 99 percent water and sand, with less than 1 percent special-purpose additives as shown in the attached "List of Anticipated Additives Used for Fracturing or Stimulating Well." Received Office of Oil & Gas 8) Total area to be disturbed, including roads, stockpile area, pits, etc, (acres): 16.51 acres	setting depth which helps to	ensure that a	all fresh water zon	es are covered.				
8) Total area to be disturbed, including roads, stockpile area, pits, etc, (acres): 16.51 acres	· '' - '' - '' - '' - '' - '' - ''				eady the well for production	. The fluid will be con	nprised of approximate	ely 99 percent
8) Total area to be disturbed, including roads, stockpile area, pits, etc, (acres): 16.51 acres	water and sand, with less th	nan 1 percent	special-purpose a	dditives as shown in t	he attached "List of Anticipa	ated Additives Used fo	or Fracturing or Stimul	ating Well."
8) Total area to be disturbed, including roads, stockpile area, pits, etc, (acres):						Rec		
BOT - 0033	0) T-4-1 4- 1	15 4 1 1	1 2 1 10		9	Conice of		
9) Area to be disturbed for well pad only, less access road (acres):						(acres):		
	9) Area to be distur	bed for v	well pad onl	y, less access	road (acres):	3.04 acres	2(113	

17 06380

20)

CASING AND TUBING PROGRAM

ТҮРЕ	Size	New or Used	<u>Grade</u>	Weight per ft.	FOOTAGE: For Drilling	INTERVALS: Left in Well	CEMENT: Fill -up (Cu. Ft.)
Conductor	20"	New	H-40	94#	40'	40'	CTS, 38 Cu. Ft.
Fresh Water	13-3/8"	New	J-55/H-40	54.5#/ 48#	525'	525' *see above	CTS, 729 Cu. Ft.
Coal	9-5/8"	New	J-55	36#	2460'	2460'	CTS, 1002 Cu. Ft.
Intermediate						T	
Production	5-1/2"	New	P-110	20#	15400'	15400'	3840 Cu. Ft.
Tubing	2-3/8"	New	N-80	4.7#		7100'	
Liners							

TYPE Wellbore Wall Size Burst Cement Cement Yield Diameter **Thickness** Pressure Type 20" 24" 0.438" 1530 1.18 Class A Conductor 13-3/8" 17-1/2" 0.38"/0.33" 2730/1730 1.18 Class A Fresh Water Coal 9-5/8" 12-1/4" 0.352" Class A 3520 1.18 Intermediate 5-1/2" 0.361" 12630 8-3/4" & 8-1/2" Lead-H/POZ & Tail - H H/POZ-1.44 & H-1.8 Production 2-3/8" 4.778" 0.19" 11200 Tubing Liners

PACKERS

Kind:	N/A	
Sizes:	N/A	
Depths Set:	N/A	Received

003 2013

Page 2 of 3

21) Describe centralizer placement for each casing string.	Conductor: no centralizers
Surface Casing: one centralizer 10' above the float shoe, one of	n the insert float collar and one every 4th joint
spaced up the hole to surface.	
Intermediate Casing: one centralizer above float joint, one cer	ntralizer 5' above float collar and one every 4th collar
to surface.	110.12
Production Casing: one centralizer at shoe joint and one every	3 joints to top of cement in intermediate casing.
22) Describe all cement additives associated with each cemen Conductor: no additives, Class A cement.	t type.
Surface: Class A cement with 2% calcium and 1/4 lb flake, 5 ga	allons of clay treat
Intermediate: Class A cement with 1/4 lb of flake, 5 gallons of c	clay treat
Production: Lead cement- 50/50 Class H/Poz + 1.5% salt + 1% C-48	5 + 0.5% C-16a + 0.2% C-12 + 0.45% C-20 + 0.05% C-51
Production: Tail cement- Class H + 45 PPS Calcium Carbonate + 1.0%	FL-160 + 0.2% ACGB-47 + 0.05% ACSA-51 + 0.2% ACR-20

23) Proposed borehole conditioning procedures.

Conductor: blowhole clean with air, run casing, 10 bbls fresh water.

Surface: blowhole clean with air, trip to conductor shoe, trip to bottom, blowhole clean with air, trip out, run casing, circulate pipe capacity + 40 bbls fresh water followed by 25 bbls bentonite mud, 10 bbls fresh water spacer.

Intermediate: blowhole clean with air, trip to surface casing shoe, trip to bottom, blowhole clean with air, trip out, run casing, circulate 40 bbls brine water followed by 10 bbls fresh water and 25 bbls bentonite mud, pump 10 bbls fresh water.

Production: circulate with 14 lb/gal NaCl mud, trip to middle of lateral, circulate, pump high viscosity sweep, trip to base of curve, pump high viscosity sweep, trip to top of curve, trip to bottom, circulate, pump high viscosity sweep, trip out, run casing, circulate 10 bbls fresh water, pump 48 bbls barite pill, pump 10 bbls fresh water followed by 48 bbls mud flush and 10 bbls water.

Received Office of Oil & Gas

Page 3 of 3

^{*}Note: Attach additional sheets as needed.

1	7 Page 0 6 3 8 0
API Number 47 - 017	
Operator's Wel	I No. Richard Unit 2H

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION OFFICE OF OIL AND GAS

FLUIDS/ CUTTINGS DISPOSAL & RECLAMATION PLAN

Operator Name Antero Re	sources Corporation	OP Code 494488557	
operator rume		The second	_
Watershed (HUC 10) Star	ndings Run of Meathouse Fork	Quadrangle Big Isaac 7.5'	_
Elevation 1331'	County_Doddridge	District Greenbrier	_
Do you anticipate using mo	ore than 5,000 bbls of water to complete th	ne proposed well work? Yes No	
Will a pit be used for drill	cuttings? Yes No X		
If so, please descr	ibe anticipated pit waste: No pit will be used at this si	ite. Drilling/Flowback fluids will be stored in tanks. Cuttings will be contained and hauled off si	le,
Will a synthetic li	ner be used in the pit? Yes N/A No	N/A If so, what ml.? N/A	- 00
	l Method For Treated Pit Wastes:		V
1	Land Application Underground Injection (UIC Permit Num		. ۲ ب
		ations when applicable. API# will be provided on Form WR-34	_)
	Off Site Disposal (Meadowfill Landfill Perm Other (Explain	III #5 WF-1032-98)	
			_
Will closed loop system be	used? Yes		_
Drilling medium anticipated	d for this well? Air, freshwater, oil based,	etcSurface - Alr/Freshwater, Intermediate - Dust/Stiff Foam, Production - Water Base	ed Mud
-If oil based, what	type? Synthetic, petroleum, etc. N/A		
Additives to be used in dril	ling medium? Please See Attachment		
		e, etc. Stored in tanks, removed offsite and taken to landfill.	
	lan to solidify what medium will be used?		
			-
-Landin of ousite	name/permit number? Meadowfill Landfill (Pe	######################################	_
on August 1, 2005, by the Corovisions of the permit are aw or regulation can lead to I certify under perpention form and all a obtaining the information, penalties for submitting false.	Office of Oil and Gas of the West Virginia e enforceable by law. Violations of any to enforcement action. Inalty of law that I have personally examinate the enforcements thereto and that, based on real believe that the information is true, as the information, including the possibility of	ions of the GENERAL WATER POLLUTION PERM Department of Environmental Protection. I understaterm or condition of the general permit and/or other nined and am familiar with the information submitting inquiry of those individuals immediately respondentate, and complete. I am aware that there are so fine or imprisonment.	nd that the applicable ed on this
Company Official (Typed I	A STATE OF THE STA		
Company Official TitleE	nvironmental Specialist	Received	200
		Office of Oil & 0	Jas
Subscribed and sworn before Handul	e me this 13 day of Sep U	, 20 BISA BOTTINELLE Notary Public Notary Public Notary Public Notary ID 20124072365 My Commission Expires Nov 9, 2	-

Proposed Revegetation T	reatment: Acres Disturbed 16.51	Prevegetation p	рН
Lime 4 Fertilizer (10-20 Mulch 2-3	Tons/acre or to correct to pF-20 or equivalent) 500 lbs	Hay or :	straw or Wood Fiber (will be used where nee Access Road (.05) + New Spoil Pads (5.53)= 16.51 Acres
		ed Mixtures	
Seed Type Tall Fescue	Area I (Temporary) Ibs/acre 45	Seed Type Tall Fescue	rea II (Permanent) lbs/acre 45
Perennial Rye	20	Doronnial Dva	20
i cicililai itye	20	Perennial Rye	20
*or type of grass seed Attach: Drawing(s) of road, locati	requested by surface owner	*or type of grass seed requ	
*or type of grass seed Attach: Drawing(s) of road, locati Photocopied section of in	requested by surface owner	*or type of grass seed requ	
*or type of grass seed Attach: Drawing(s) of road, locati Photocopied section of in	requested by surface owner ion,pit and proposed area for land appropriate to the second seco	*or type of grass seed requ	t 5 to Wu

Field Reviewed?

) Yes

OCT - 2013

Interceived Office of Oil & Gas

west virginia department of environmental protection





Water Management Plan: Primary Water Sources



WMP-01529

API/ID Number:

047-017-06380

Operator:

Antero Resources

Richard Unit 2H

Important:

For each proposed primary water source (including source intakes for purchased water sources) identified in your water management plan, and summarized herein, DEP has made an evaluation concerning water availability over the specified date range. DEP's assessment is based on the following considerations:

- Statistical analysis of historical USGS stream gauge data (transferred to un-gauged locations as necessary);
- Identification of sensitive aquatic life (endangered species, mussels, etc.);
- •Quantification of known existing demands on the water supply (Large Quantity Users);
- Minimum flows required by the Army Corps of Engineers; and
- · Designated stream uses.

Based on these factors, DEP has provided, for each intake location (and origination point for purchased water), a reference gauge location and discharge flow reading which must be surpassed prior to withdrawals. Additionally, DEP has established a minimum passby flow at the withdrawal location which must also be surpassed prior to withdrawals. These thresholds are considered terms of the permit and are enforceable as such.

DEP is aware that some intake points will be used for mutiple wells and well sites. In these cases, the thresholds set by the Water Management Plan are to be interepreted as total withdrawal limits for each location over the specified date range regardless of how many wells are supported by that intake.

For all purchased water intakes, determinations of water availability are made at the original source intake location. It is the responsibility of the Oil and Gas Operator, not the seller, to cease withdrawal of water from the seller when flows are less than the minimum gauge reading at the stream gauge referenced by the Water Management Plan in order to protect stream uses.

Note that the determinations made herein are based on the best available data, but it is impossible to predict water availability in the future. While the DEP has carefully established these minimum withdrawal thresholds, it remains the operator's responsibility to protect aquatic life at all times. Approval to withdrawal is contingent upon permission from the land owner. It is the responsibility of the operator to secure and maintain permission prior to any withdrawals.

The operator is reminded that 24-48 hours prior to withdrawing (or purchasing) water, DEP must be notified by email at DEP.water.use@wv.gov.

Source Summary

WMP-01529

API Number:

047-017-06380

Operator:

Antero Resources

Richard Unit 2H

Stream/River

Ohio River @ Ben's Run Withdrawal Site Source

Tyler

Owner:

Ben's Run Land Company

Limited Partnership

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

11/22/2015 11/22/2014

8,800,000

39.46593

-81.110781

✓ Regulated Stream?

Ohio River Min. Flow

Ref. Gauge ID:

999999

Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm):

3,360

Min. Gauge Reading (cfs):

6,468.00

Min. Passby (cfs)

DEP Comments:

Refer to the specified station on the National Weather Service's Ohio River forecast

website: http://www.erh.noaa.gov/ohrfc//flows.shtml

Source

West Fork River @ JCP Withdrawal

Harrison

Owner:

James & Brenda Raines

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

39.320913

Intake Latitude: Intake Longitude: -80.337572

11/22/2014

11/22/2015

8,800,000

3061000

WEST FORK RIVER AT ENTERPRISE, WV

Max. Pump rate (gpm):

2.000

Regulated Stream? Stonewall Jackson Dam Ref. Gauge ID:

Min. Gauge Reading (cfs):

175.00

Min. Passby (cfs)

146.25

DEP Comments:

Source

West Fork River @ McDonald Withdrawal

Harrison

Owner:

David Shrieves

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

11/22/2014

11/22/2015

8,800,000

39.16761

-80.45069

Regulated Stream? Stonewall Jackson Dam Ref. Gauge ID:

3061000

WEST FORK RIVER AT ENTERPRISE, WV

Max. Pump rate (gpm):

3.000

Min. Gauge Reading (cfs):

175.00

Min. Passby (cfs)

106.30

Source	West Fork Rive	er @ GAL Withdra	wal		Harrison	Owner:	David Shrieves
Start Date 11/22/2014			Volume (gal) . 800,000	Max. daily p	urchase (gal)	Intake Latitude: 39.16422	Intake Longitude: -80.45173
☑ Regulated	d Stream? Stone	ewall Jackson Dan	n Ref. Gauge II	D: 30610 0	00	WEST FORK RIVER AT ENTE	RPRISE, WV
Max. Pump	rate (gpm):	2,000 Mi	n. Gauge Read	ing (cfs):	175.00	Min. Passby (cf	rs) 106.30
	DEP Commer	nts:					
Source	Middle Island (Creek @ Mees Wi	thdrawal Site		Pleasants	Owner:	Sarah E. Mees
Start Date	End Date	Total	Volume (gal)	Max. daily p	urchase (gal)	Intake Latitude:	Intake Longitude:
11/22/2014	4 11/22/2015	8	,800,000			39.43113	-81.079567
Regulated	d Stream?		Ref. Gauge II	D: 31145 0	00	MIDDLE ISLAND CREEK AT	LITTLE, WV
Max. Pump	rate (gpm):	3,360 Mi	n. Gauge Read	ing (cfs):	52.59	Min. Passby (cf	s) 47.63
	DEP Commer	nts:					
Source	Middle Island (Creek @ Dawson '	Withdrawal		Tyler	Owner: G a	ary D. and Rella A. Dawson
Start Date			Volume (gal)	Max. daily p	urchase (gal)		Intake Longitude:
11/22/2014	4 11/22/2015	8,	.800,000			39.379292	-80.867803
Regulated	d Stream?		Ref. Gauge II	D: 31145 (00	MIDDLE ISLAND CREEK AT	LITTLE, WV
Max. Pump	rate (gpm):	3,000 Mi	n. Gauge Read	ing (cfs):	76.03	Min. Passby (cf	rs) 28.83
	DEP Commer	nts:					

0	Source	McElroy Creek	@ Forest W	/ithdrawal		Tyler	Owner:	Forest (C. & Brenda L. Moore
	Start Date 11/22/2014	End Date 11/22/2015		Total Volume (gal) 8,800,000	Max. daily	purchase (gal)	Intake Latit 39.396 7		ake Longitude: -80.738197
	☐ Regulated	Stream?		Ref. Gauge I	D: 3114 !	500	MIDDLE ISLAND CRE	EK AT LITT	LE, WV
	Max. Pump r	ate (gpm):	1,000	Min. Gauge Read	ling (cfs):	74.77	Min. Passl	by (cfs)	13.10
		DEP Commer	nts:						
0	Source	Meathouse For	·k @ Gagno	n Withdrawal		Doddridge	Owner:	_	Gagnon and san C. Gagnon
	Start Date 11/22/2014	End Date 11/22/2015		Total Volume (gal) 8,800,000	Max. daily	purchase (gal)	Intake Latit 39.260 9		ake Longitude: -80.720998
	☐ Regulated	Stream?		Ref. Gauge I	D: 3114 !	500	MIDDLE ISLAND CRE	EK AT LITT	LE, WV
	Max. Pump r	rate (gpm):	1,000	Min. Gauge Read	ling (cfs):	71.96	Min. Passl	by (cfs)	11.74
		DEP Commer	nts:						
Ø	Source	Meathouse For	k @ White	hair Withdrawal		Doddridge	Owner:	E	ton Whitehair
	Start Date 11/22/2014	End Date 11/22/2015		Total Volume (gal) 8,800,000	Max. daily	purchase (gal)	Intake Latit 39.2113		ake Longitude: -80.679592
	☐ Regulated	Stream?		Ref. Gauge II	D: 3114 !	500	MIDDLE ISLAND CRE	EK AT LITT	LE, WV
	Max. Pump r	ate (gpm):	1,000	Min. Gauge Read	ling (cfs):	69.73	Min. Passl	by (cfs)	7.28

11/01/2013

Source	Tom's Fork @ E	rwin Withdrawal			Doddridge	Owner:	John F. Er	win and Sandra E. Erwin
Start Date 11/22/2014	End Date 11/22/2015		lume (gal) 1 0,000	Max. daily pu	irchase (gal)		.174306	Intake Longitude: -80.702992
☐ Regulated	l Stream?		Ref. Gauge ID:	3114500)	MIDDLE ISLAND	CREEK AT	LITTLE, WV
Max. Pump	rate (gpm):	1,000 Min. 0	Gauge Readin	ng (cfs):	69.73	Min.	Passby (cf:	s) 0.59
	DEP Commer	nts:						
Source	Arnold Creek @	Davis Withdrawal			Doddridge	Owner:		Jonathon Davis
Start Date 11/22/2014	End Date 11/22/2015		lume (gal) 1 0,000	Max. daily pu	irchase (gal)		Latitude: .302006	Intake Longitude: -80.824561
☐ Regulated	l Stream?		Ref. Gauge ID:	3114500)	MIDDLE ISLAND	CREEK AT	LITTLE, WV
Max. Pump	rate (gpm):	1,000 Min. (Gauge Readin	ng (cfs):	69.73	Min.	Passby (cf:	s) 3.08
	DEP Commer	nts:						
Source	Buckeye Creek	@ Powell Withdraw	al		Doddridge	Owner:		Dennis Powell
Start Date 11/22/2014	End Date 11/22/2015		lume (gal) 1 0,000	Max. daily pu	rchase (gal)		Latitude: . 277142	Intake Longitude: -80.690386
☐ Regulated	Stream?		Ref. Gauge ID:	3114500)	MIDDLE ISLAND	CREEK AT	LITTLE, WV
Max. Pump	rate (gpm):	1,000 Min. 0	Gauge Readin	g (cfs):	69.73	Min.	Passby (cf:	4.59

South Fork of Hughes River @ Knight Withdrawal Ritchie Tracy C. Knight & Source Owner: Stephanie C. Knight Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: Start Date **End Date** 11/22/2014 11/22/2015 8,800,000 39.198369 -80.870969 Regulated Stream? Ref. Gauge ID: 3155220 **JOUTH FORK HUGHES RIVER BELOW MACFARLAN, W**\ Min. Passby (cfs) 1.95 Max. Pump rate (gpm): 3,000 Min. Gauge Reading (cfs): 39.80 **DEP Comments:** Source North Fork of Hughes River @ Davis Withdrawal Ritchie Owner: Lewis P. Davis and Norma J. Davis Start Date **End Date** Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: 11/22/2014 11/22/2015 8,800,000 39.322363 -80.936771 ☐ Regulated Stream? Ref. Gauge ID: 3155220 **JOUTH FORK HUGHES RIVER BELOW MACFARLAN, W**\ Max. Pump rate (gpm): 1,000 Min. Gauge Reading (cfs): Min. Passby (cfs) 35.23 2.19

Source Summary

WMP-01529

API Number:

047-017-06380

Operator:

Antero Resources

Richard Unit 2H

Purchased Water

Ohio River @ Select Energy Source

Pleasants

Owner:

Select Energy

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude:

Intake Longitude:

11/22/2014

11/22/2015

8,800,000

500,000

39.346473

-81.338727

✓ Regulated Stream?

Ohio River Min. Flow Ref. Gauge ID:

9999998

Ohio River Station: Racine Dam

Max. Pump rate (gpm):

1,680

Min. Gauge Reading (cfs):

7,216.00

Min. Passby (cfs)

DEP Comments:

Refer to the specified station on the National Weather Service's Ohio River forecast

website: http://www.erh.noaa.gov/ohrfc//flows.shtml

Middle Island Creek @ Solo Construction Source

Pleasants

Owner:

Solo Construction, LLC

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

11/22/2014

11/22/2015

8,800,000

1,000,000

39.399094

-81.185548

✓ Regulated Stream?

Ohio River Min. Flow Ref. Gauge ID:

9999999

Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm):

Min. Gauge Reading (cfs):

6,468.00

Min. Passby (cfs)

DEP Comments:

Elevation analysis indicates that this location has the same elevation as Middle Island Creek's pour point into the Ohio River. As such, it is deemed that water flow at this

location is heavily influenced by the Ohio River.

Source Claywood Park PSD Wood

Owner:

Claywood Park PSD

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

11/22/2014

11/22/2015

8,800,000

9999998

Ohio River Station: Racine Dam

Max. Pump rate (gpm):

✓ Regulated Stream?

Min. Gauge Reading (cfs):

Ref. Gauge ID:

7,216.00

Min. Passby (cfs)

DEP Comments:

Elevation analysis indicates that this location has approximately the same elevation as Little Kanawha's pour point into the Ohio River. As such, it is deemed that water flow

at this location is heavily influenced by the Ohio River.

Source Sun Valley Public Service District Harrison Owner: Sun Valley PSD

Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude:

200,000

Regulated Stream? Stonewall Jackson Dam Ref. Gauge ID: 3061000 WEST FORK RIVER AT ENTERPRISE, WV

Max. Pump rate (gpm): Min. Gauge Reading (cfs): 171.48 Min. Passby (cfs)

8,800,000


DEP Comments:

11/22/2015

11/22/2014

API/ID Number: 047-017-06380 Antero Resources WMP-01529 Operator: Richard Unit 2H Ohio River @ Select Energy Source Latitude: 39.346473 Source ID: 27298 Source Name Select Energy Source Longitude: -81.338727 5030201 HUC-8 Code: Anticipated withdrawal start date: 11/22/2014 25000 County: Pleasants Drainage Area (sq. mi.): Anticipated withdrawal end date: 11/22/2015 ✓ Mussel Stream? **Endangered Species?** 8,800,000 Total Volume from Source (gal): Trout Stream? ☐ Tier 3? 1,680 Max. Pump rate (gpm): Ohio River Min. Flow Regulated Stream? Proximate PSD? Max. Simultaneous Trucks: Max. Truck pump rate (gpm) Gauged Stream? Ohio River Station: Racine Dam Reference Gaug 9999998 25,000.00 Drainage Area (sq. mi.) Gauge Threshold (cfs): 7216

Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	50,956.00		-
2	54,858.00		-
3	73,256.00	(4)	-
4	62,552.00	2	-
5	43,151.00		9
6	27,095.00		1.2
7	17,840.00	(4)	4.0
8	14,941.00	-	
9	14,272.00	2	- 9
10	17,283.00		1.4
11	29,325.00		
12	46,050.00	14	4

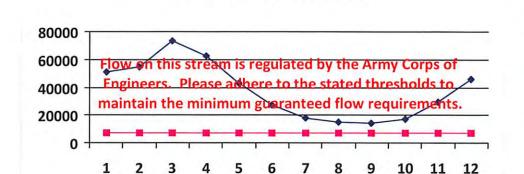

Median Monthly Flow — Threshold


Water Availability Profile

Base Threshold (cfs): Upstream Demand (cfs): Downstream Demand (cfs): Pump rate (cfs): Headwater Safety (cfs): Ungauged Stream Safety (cfs): O.00 Min. Gauge Reading (cfs): Passby at Location (cfs):

Water Availability Assessment of Location

WMP-01529 API/ID Number: 047-017-06380 Operator: Antero Resources Richard Unit 2H Middle Island Creek @ Solo Construction Source Latitude: 39.399094 Source ID: 27299 Source Name Source Longitude: -81.185548 Solo Construction, LLC HUC-8 Code: 5030201 11/22/2014 Anticipated withdrawal start date: Drainage Area (sq. mi.): County: Pleasants 11/22/2015 Anticipated withdrawal end date: **Endangered Species?** ✓ Mussel Stream? 8,800,000 Total Volume from Source (gal): Trout Stream? ☐ Tier 3? Max. Pump rate (gpm): Regulated Stream? Ohio River Min. Flow Proximate PSD? Max. Simultaneous Trucks: City of St. Marys Max. Truck pump rate (gpm) Gauged Stream? 9999999 Ohio River Station: Willow Island Lock & Dam Reference Gaug 25,000.00 6468 Drainage Area (sq. mi.) Gauge Threshold (cfs):

Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)		
1	45,700.00		1.5		
2	49,200.00		1.2		
3	65,700.00	19	1.4		
4	56,100.00	Q	D+1		
5	38,700.00	-	-		
6	24,300.00				
7	16,000.00				
8	13,400.00		-		
9	12,800.00		12.		
10	15,500.00	-	4		
11	26,300.00	1.4	-		
12	41,300.00		1		

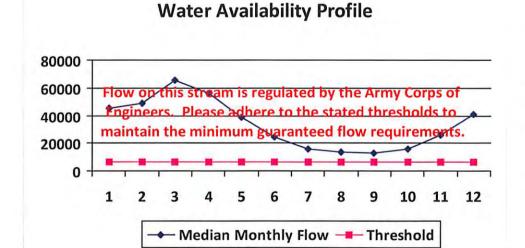

Min. Gauge Reading (cfs): Passby at Location (cfs):	
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	0.00
Pump rate (cfs):	
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	-

Source Detail WMP-01529 API/ID Number: 047-017-06380 Operator: Antero Resources Richard Unit 2H Source ID: 27300 Claywood Park PSD Source Name Source Latitude: -Claywood Park PSD Source Longitude: -HUC-8 Code: 5030203 11/22/2014 Anticipated withdrawal start date: Wood Drainage Area (sq. mi.): 25000 County: Anticipated withdrawal end date: 11/22/2015 ✓ Mussel Stream? **Endangered Species?** Total Volume from Source (gal): 8,800,000 Trout Stream? ☐ Tier 3? Max. Pump rate (gpm): Regulated Stream? Max. Simultaneous Trucks: Proximate PSD? Claywood Park PSD Max. Truck pump rate (gpm) Gauged Stream? 9999998 Ohio River Station: Racine Dam Reference Gaug 25,000.00 7216 Gauge Threshold (cfs): Drainage Area (sq. mi.) Estimated Median Threshold monthly flow Available (+ pump Month (cfs) water (cfs) 1 50,956.00 2 54,858.00 3 73,256.00 4 62,552.00 5 43,151.00 6 27,095.00 7 17,840.00 8 14,941.00 9 14,272.00 17,283.00 10 11 29,325.00 12 46,050.00 Water Availability Assessment of Location **Water Availability Profile** Base Threshold (cfs): Upstream Demand (cfs): 0.00 80000 Downstream Demand (cfs): 0.00 60000 Flow on this stream is regulated by the Army Corps of

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the
proposed numberate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month

10

11

12

9

8

Please adhere to the stated thresholds to

7

Median Monthly Flow — Threshold

maintain the minimum guaranteed flow requirements.

6

5

0.00

0.00

Pump rate (cfs):

Headwater Safety (cfs):

Ungauged Stream Safety (cfs):

Min. Gauge Reading (cfs): Passby at Location (cfs):

40000

20000


1

2

3

			300	irce Detail			
	WMP-0	01529	API/ID Number	047-017-063 Chard Unit 2H	80 Operator:	Antero I	Resources
Source II	D: 27301 Sou		alley Public Service alley PSD	e District		_atitude: - ngitude: -	
	HUC-8 Code: Drainage Area (dangered Species) out Stream?			Harrison	Anticipated withdrawal s Anticipated withdrawal Total Volume from So	end date:	11/22/2014 11/22/2015 8,800,000
☐ Pro	gulated Stream? oximate PSD? ouged Stream?	Stonewall Jac	ckson Dam			ate (gpm): Max. Simultaneou x. Truck pump ra	
	Reference Gaug Drainage Area (sc	3061000 q. mi.) 759		ER AT ENTERPRISE,		eshold (cfs):	234
Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)				
1	1,200.75	-					
2	1,351.92	3	+				
3	1,741.33	-	100				
4	995.89	-					
5	1,022.23						
6	512.21	-	4				
7	331.86	3					
8	316.87	-	1.9				
9	220.48		112				
10	216.17	-	7				
11	E42 4E						

Water Availability Profile

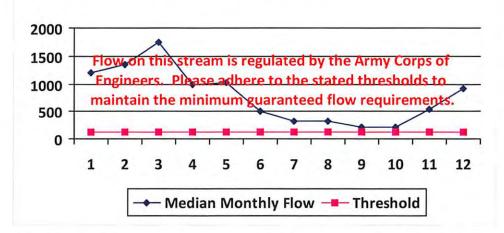

Water Availability Assessment of Location


Base Threshold (cfs):	-
Upstream Demand (cfs):	
Downstream Demand (cfs):	
Pump rate (cfs):	
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00

12

926.12

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.


Source Detail API/ID Number: WMP-01529 047-017-06380 Operator: Antero Resources Richard Unit 2H Source Latitude: 39.46593 Ohio River @ Ben's Run Withdrawal Site Source ID: 27284 Source Name Ben's Run Land Company Limited Partnership Source Longitude: -81.110781 5030201 HUC-8 Code: Anticipated withdrawal start date: 11/22/2014 25000 Tyler Drainage Area (sq. mi.): County: 11/22/2015 Anticipated withdrawal end date: **Endangered Species?** ✓ Mussel Stream? 8,800,000 Total Volume from Source (gal): Trout Stream? Tier 3? 3,360 Ohio River Min. Flow Max. Pump rate (gpm): Regulated Stream? Max. Simultaneous Trucks: Proximate PSD? Max. Truck pump rate (gpm) Gauged Stream? Ohio River Station: Willow Island Lock & Dam 9999999 Reference Gaug 25,000.00 Gauge Threshold (cfs): 6468 Drainage Area (sq. mi.) Median Estimated Threshold Available monthly flow (+ pump Month water (cfs) (cfs) 1 45,700.00 2 49,200.00 3 65,700.00 4 56,100.00 38,700.00 5 6 24,300.00 16,000.00 7 8 13,400.00 9 12,800.00 10 15,500.00 11 26,300.00 41,300.00 12 Water Availability Assessment of Location **Water Availability Profile**

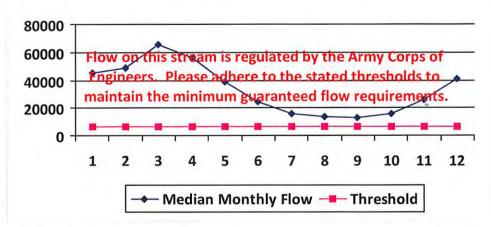

Base Threshold (cfs):	
Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	7.49
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00

WMP-01529 API/ID Number: 047-017-06380 Operator: Antero Resources Richard Unit 2H West Fork River @ JCP Withdrawal Source Latitude: 39.320913 27285 Source ID: Source Name Source Longitude: -80.337572 James & Brenda Raines 5020002 HUC-8 Code: Anticipated withdrawal start date: 11/22/2014 532.2 Harrison Drainage Area (sq. mi.): County: Anticipated withdrawal end date: 11/22/2015 **Endangered Species?** ✓ Mussel Stream? 8,800,000 Total Volume from Source (gal): Trout Stream? Tier 3? 2.000 Stonewall Jackson Dam Max. Pump rate (gpm): Regulated Stream? Max. Simultaneous Trucks: Proximate PSD? Max. Truck pump rate (gpm) Gauged Stream? 3061000 WEST FORK RIVER AT ENTERPRISE, WV Reference Gaug 234 759.00 Gauge Threshold (cfs): Drainage Area (sq. mi.)

Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	1,630.82	*	-
2	1,836.14		-
3	2,365.03		7
4	1,352.59		
5	1,388.37		9
6	695.67	2	
7	450.73		-
8	430.37	1.8	7
9	299.45	4	1.5
10	293.59	G.	- 4
11	736.74	,	-
12	1,257.84	4	-

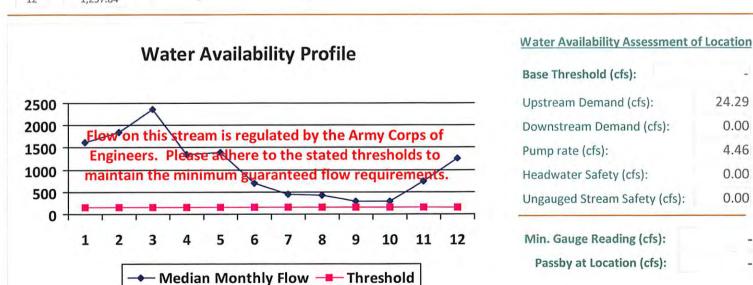

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.


24.29

0.00

4.46

0.00

0.00

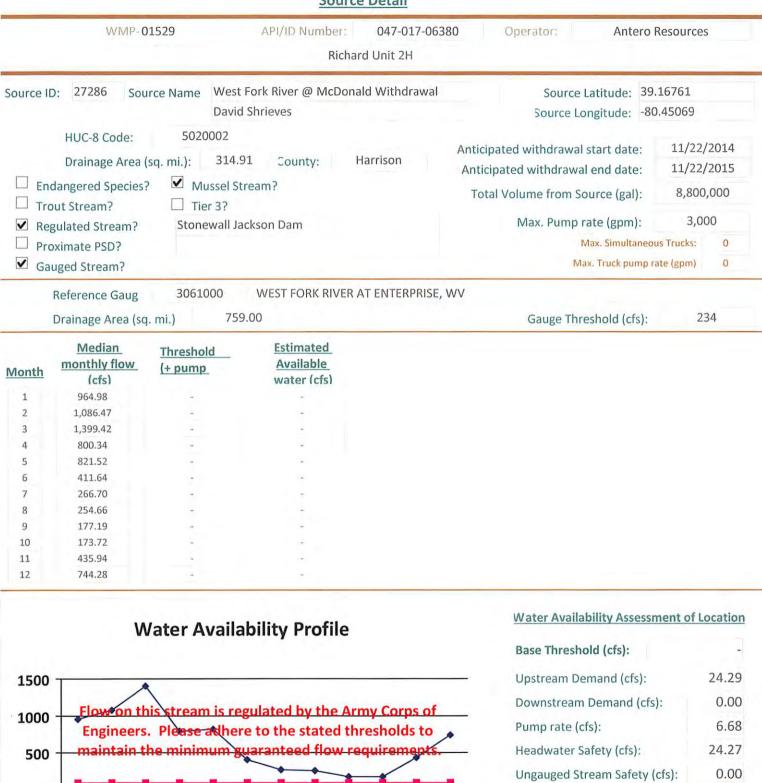

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

10

11

12

Min. Gauge Reading (cfs):

Passby at Location (cfs):

9

2

1

3


5

6

7

Median Monthly Flow — Threshold



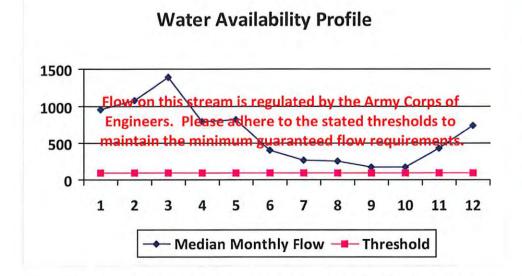

Base Threshold (cfs):	11.4
Upstream Demand (cfs):	24.29
Downstream Demand (cfs):	0.00
Pump rate (cfs):	4.46
Headwater Safety (cfs):	24.18
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	
Passby at Location (cfs):	

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

8

9

10

11 12 253.65


176.49

173.04 434.22

741.35

	WMP-01529	API/ID Number: 047-017-06380	Operator: Ante	ero Resources
Source ID:	27288 Source Name	Richard Unit 2H Middle Island Creek @ Mees Withdrawal Site Sarah E. Mees	Source Latitude:	39.43113 -81.079567
D Endang ☐ Trout S ☐ Regula ☐ Proxim			Anticipated withdrawal start date Anticipated withdrawal end date Total Volume from Source (gal) Max. Pump rate (gpm) Max. Simulta Max. Truck pur	2: 11/22/2015 2: 8,800,000 2: 3,360 2: 0
	erence Gaug 3114. inage Area (sq. mi.)	MIDDLE ISLAND CREEK AT LITTLE, WV	Gauge Threshold (cfs	s): 45

Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	519.88	55.12	465.14
2	653.95	55.12	599.22
3	731.75	55.12	677.01
4	543.38	55.12	488,65
5	286.64	55.12	231.90
6	100.10	55.12	45.36
7	56.65	55.12	1.91
8	46.64	55.12	-8.10
9	23.89	55.12	-30.85
10	30.01	55.12	-24.72
11	146.56	55.12	91.83
12	358.10	55.12	303.37

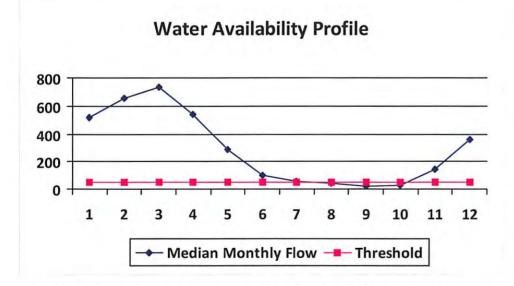


Min. Gauge Reading (cfs): Passby at Location (cfs):	52.49 47.63
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	0.00
Pump rate (cfs):	7.49
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	47.63

WMP-01529	API/ID Number:	047-017-06380	Operator:	Antero Res	sources
	Richar	d Unit 2H			
Source ID: 27289 Source Name	Middle Island Creek @ Daw Gary D. and Rella A. Dawson		Source Lati		
	201 181.34 County: ssel Stream? r 3?	Tyler	Anticipated withdrawal star Anticipated withdrawal en Total Volume from Sourc Max. Pump rate	rt date: d date: ee (gal):	11/22/2014 11/22/2015 8,800,000 3,000
✓ Gauged Stream?				uck pump rate	
Reference Gaug 31145 Drainage Area (sq. mi.)	00 MIDDLE ISLAND CRI	EEK AT LITTLE, WV	Gauge Thresho		45

Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	194.47	42.06	152.68
2	244.62	42.06	202.83
3	273.72	42.06	231.93
4	203.26	42.06	161.47
5	107.22	42.06	65.43
6	37.44	42.06	-4.35
7	21.19	42.06	-20.60
8	17.45	42.06	-24.34
9	8.94	42.06	-32.85
10	11.23	42.06	-30.56
11	54.82	42.06	13.04
12	133.96	42.06	92.17



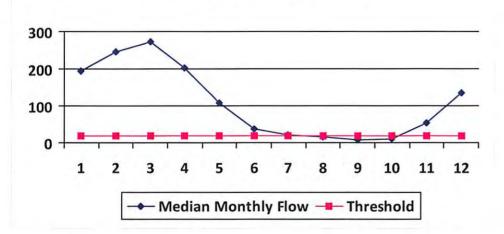

6.03
0.00
4.45
6.68
6.55
3.10
7.82

Passby at Location (cfs):


Water Availability Assessment of Location

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

28.82

WMP-015	529	API/ID Number		Operator: Antero	Resources
		Rie	chard Unit 2H		
Source ID: 27290 Source	e Name McEl	roy Creek @ Fores	t Withdrawal	Source Latitude: 3	9.39675
	Fores	st C. & Brenda L. M	oore	Source Longitude: -8	30.738197
HUC-8 Code: Drainage Area (sq Endangered Species? Trout Stream?	5030201 . mi.): 88.8		Tyler	Anticipated withdrawal start date: Anticipated withdrawal end date: Total Volume from Source (gal): Max. Pump rate (gpm):	11/22/2014 11/22/2015 8,800,000 1,000
Regulated Stream? Proximate PSD? Gauged Stream?				Max. Simultane Max. Truck pump	ous Trucks: 0


Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	95.28	19.78	75.68
2	119.86	19.78	100.25
3	134.11	19.78	114.51
4	99.59	19.78	79.99
5	52.54	19.78	32.93
6	18.35	19.78	-1.26
7	10.38	19.78	-9.22
8	8.55	19.78	-11.05
9	4.38	19.78	-15.23
10	5.50	19.78	-14.10
11	26.86	19.78	7.26
12	65.63	19.78	46.03

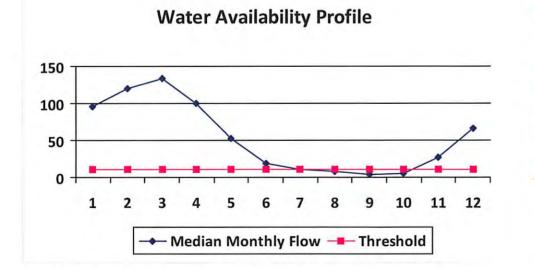

Min. Gauge Reading (cfs): Passby at Location (cfs):	74.19 13.09
Ungauged Stream Safety (cfs):	2.18
Headwater Safety (cfs):	2.18
Pump rate (cfs):	2.23
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	4.46
Base Threshold (cfs):	8.73

WMP-01529	API/ID Number:	047-017-06380	Operator: Ante	ero Resources
	Richa	rd Unit 2H		
ource ID: 27291 Source N	ame Meathouse Fork @ Gagnor	n Withdrawal	Source Latitude:	39.26054
	George L. Gagnon and Susa	n C. Gagnon	Source Longitude:	-80.720998
☐ Trout Stream? ☐ Regulated Stream? ☐ Proximate PSD?	5030201 ii.): 60.6 County: D ☑ Mussel Stream? ☐ Tier 3?	oddridge		2: 11/22/2015 2: 8,800,000 2: 1,000 3: 1,000 4: 0
☐ Gauged Stream?			Max. Truck pur	mp rate (gpm) 0

Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	64.99	13.39	51.70
2	81.75	13.39	68.46
3	91.47	13.39	78.19
4	67.93	13.39	54.64
5	35.83	13.39	22.55
6	12.51	13.39	-0.77
6 7	7.08	13.39	-6.20
8	5.83	13.39	-7.45
9	2.99	13.39	-10.30
10	3.75	13.39	-9.53
11	18.32	13.39	5.04
12	44.76	13.39	31.48

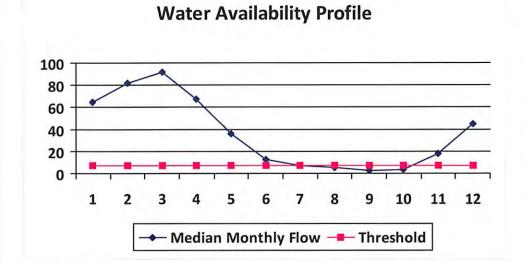

Min. Gauge Reading (cfs): Passby at Location (cfs):	71.96 11.74
Ungauged Stream Safety (cfs):	1.49
Headwater Safety (cfs):	1.49
Pump rate (cfs):	2.23
Downstream Demand (cfs):	2.81
Upstream Demand (cfs):	2.23
Base Threshold (cfs):	5.95


WMP-01529 API/ID Number: 047-017-06380 Operator: Antero Resources Richard Unit 2H Source ID: 27292 Meathouse Fork @ Whitehair Withdrawal Source Latitude: 39.211317 Source Name Elton Whitehair Source Longitude: -80.679592 5030201 HUC-8 Code: 11/22/2014 Anticipated withdrawal start date: 30.37 Doddridge Drainage Area (sq. mi.): County: Anticipated withdrawal end date: 11/22/2015 **Endangered Species?** ✓ Mussel Stream? Total Volume from Source (gal): 8,800,000 Trout Stream? ☐ Tier 3? 1,000 Max. Pump rate (gpm): Regulated Stream? Max. Simultaneous Trucks: Proximate PSD? Max. Truck pump rate (gpm) Gauged Stream? 3114500 MIDDLE ISLAND CREEK AT LITTLE, WV Reference Gaug

<u>Month</u>	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	32.57	6.70	26.15
2	40.97	6.70	34.55
3	45.84	6.70	39.42
4	34.04	6.70	27.62
5	17.96	6.70	11.54
6	6.27	6.70	-0.15
7	3.55	6.70	-2.87
8	2.92	6.70	-3.50
9	1.50	6.70	-4.92
10	1.88	6.70	-4.54
11	9.18	6.70	2.76
12	22.43	6.70	16.01

Water Availability Profile

458.00

Drainage Area (sq. mi.)

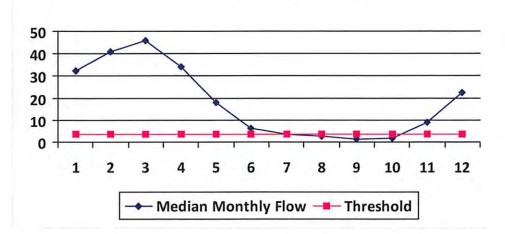

Water Availability Assessment of Location

Gauge Threshold (cfs):


Min. Gauge Reading (cfs): Passby at Location (cfs):	69.73 7.29
Ungauged Stream Safety (cfs):	0.75
Headwater Safety (cfs):	0.75
Pump rate (cfs):	2.23
Downstream Demand (cfs):	2.81
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	2.98

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

45



Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	4.30	2.82	1.88
2	5.41	2.82	2.98
3	6.05	2.82	3.63
4	4.49	2.82	2.07
5	2.37	2.82	-0.05
6	0.83	2.82	-1.60
7	0.47	2.82	-1.96
8	0.39	2.82	-2.04
9	0.20	2.82	-2.23
10	0.25	2.82	-2.18
11	1.21	2.82	-1.21
12	2.96	2.82	0.54

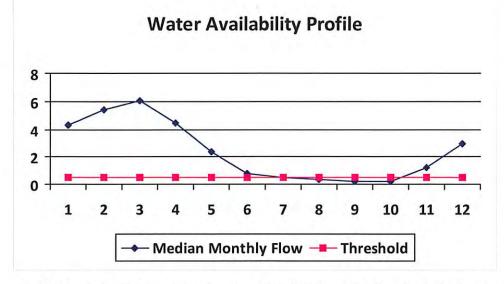


69.73
0.10
0.10
2.23
0.00
0.00
0.39

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

WMP-01529	API/ID Number:	047-017-06380	Operator: Ante	ero Resources
	Richar	d Unit 2H		
Source ID: 27294 Source Name	rnold Creek @ Davis With	drawal	Source Latitude:	39.302006
J	onathon Davis		Source Longitude:	-80.824561
HUC-8 Code: 503020		A	nticipated withdrawal start date	e: 11/22/2014
Drainage Area (sq. mi.):	20.83 County: Do	oddridge	Anticipated withdrawal end date	e: 11/22/2015
☐ Endangered Species? ✓ Muss ☐ Trout Stream? ☐ Tier 3	sel Stream?		Total Volume from Source (gal): 8,800,000
Regulated Stream?			Max. Pump rate (gpm): 1,000
Proximate PSD?			Max. Simulta	aneous Trucks: 0
☐ Gauged Stream?			Max. Truck pu	mp rate (gpm) 0

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	22.34	5.30	17.29
2	28.10	5.30	23.05
3	31.44	5.30	26.39
4	23.35	5.30	18.30
5	12.32	5.30	7.26
6	4.30	5.30	-0.75
7	2.43	5.30	-2.62
8	2.00	5.30	-3.05
9	1.03	5.30	-4.03
10	1.29	5.30	-3.76
11	6.30	5.30	1.25
12	15.39	5.30	10.34

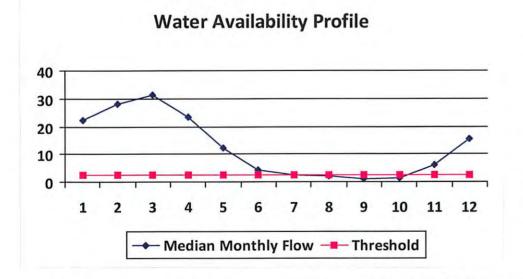

Min. Gauge Reading (cfs):	69.73
Ungauged Stream Safety (cfs):	0.51
Headwater Safety (cfs):	0.51
Pump rate (cfs):	2.23
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	2.05


WMP-01529	API/ID Number:	047-017-06380	Operator:	Antero F	Resources
	Richar	d Unit 2H			
Source ID: 27295 Source Name Bu	ckeye Creek @ Powell W	ithdrawal	Source L	atitude: 39.	277142
De	ennis Powell		Source Lo	ngitude: -80	.690386
	1.15 County: Do	oddridge	Anticipated withdrawal Anticipated withdrawal Total Volume from So Max. Pump ra	end date: ource (gal):	11/22/2014 11/22/2015 8,800,000 1,000
Proximate PSD? Gauged Stream?				1ax. Simultaneou x. Truck pump ra	
Reference Gaug 3114500 Drainage Area (sq. mi.)	MIDDLE ISLAND CR	EEK AT LITTLE, WV		eshold (cfs):	45

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)	
1	33.41	6.82	26.95	
2	42.02	6.82	35.56	
3	47.02	6.82	40.56	
4	34.92	6.82	28.46	
5	18.42	6.82	11.96	
6	6.43	6.82	-0.03	
7	3.64	6.82	-2.82	
8	3.00	6.82	-3.46	
9	1.53	6.82	-4.92	
10	1.93	6.82	-4.53	
11	9.42	6.82	2.96	
12	23.01	6.82	16.55	

Water Availability Profile

5

4



8

7

Median Monthly Flow — Threshold

_	Ungauged Stream Safety
	Headwater Safety (cfs):
-	Pump rate (cfs):
-	Downstream Demand (cf
_	Upstream Demand (cfs):

water Av	aliability Assessme	ent of Location
Base Thr	eshold (cfs):	3.06

0.00 Downstream Demand (cfs): 2.23 Pump rate (cfs):

0.77 Headwater Safety (cfs): Ungauged Stream Safety (cfs): 0.77

Min. Gauge Reading (cfs):

69.73

Passby at Location (cfs):

4.59

0.00

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

10

11

12

9

50

40

30

20

10


1

2

3

WMP-01529	API/ID Number:	047-017-06380	Operator:	Antero Resources
	Richar	rd Unit 2H		
Source ID: 27296 Source Name	South Fork of Hughes River	@ Knight Withdrawal	Source Latitu	ide: 39.198369
	Tracy C. Knight & Stephanie	e C. Knight	Source Longitu	ide: -80.870969
HUC-8 Code: 5030 Drainage Area (sq. mi.): ✓ Endangered Species? ✓ Mu		Ritchie	icipated withdrawal start ticipated withdrawal end	date: 11/22/2015
	er 3?	Т	otal Volume from Source Max. Pump rate (g	
□ Proximate PSD?✓ Gauged Stream?				multaneous Trucks: 0 ck pump rate (gpm) 0
Reference Gaug 3155.	220 SOUTH FORK HUGH	IES RIVER BELOW MAG	CFARLAN, WV	
Drainage Area (sq. mi.)	229.00		Gauge Threshol	d (cfs): 22

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	45.67	14.26	31.44
2	59.55	14.26	45.31
3	65.21	14.26	50.97
4	36.87	14.26	22.63
5	25.86	14.26	11.63
6	13.90	14.26	-0.33
7	6.89	14.26	-7.34
8	3.98	14.26	-10.25
9	4.79	14.26	-9.45
10	5.20	14.26	-9.04
11	15.54	14.26	1.30
12	32.06	14.26	17.82

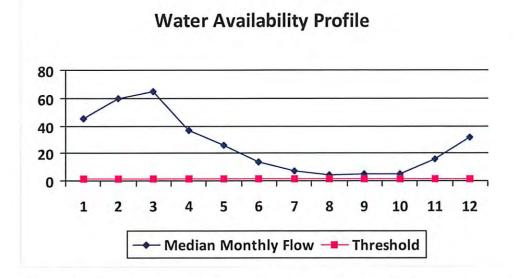

Base Threshold (cfs):	1.56
Unstream Demand (cfs):	5.62

Water Availability Assessment of Location

Downstream Demand (cfs): 0.00

Pump rate (cfs): 6.68
Headwater Safety (cfs): 0.39

Ungauged Stream Safety (cfs): 0.00

Min. Gauge Reading (cfs):


39.80

Passby at Location (cfs):

1.95

WMP-01529	API/ID Number:	047-017-06380	Operator: Anter	o Resources
	Richard	l Unit 2H		
Source ID: 27297 Source Name No	orth Fork of Hughes River @	@ Davis Withdrawa	al Source Latitude:	39.322363
Le	ewis P. Davis and Norma J. I	Davis	Source Longitude: -	80.936771
HUC-8 Code: 5030203		A	nticipated withdrawal start date:	11/22/2014
Drainage Area (sq. mi.): 15.18 County: Ritchie ✓ Endangered Species? ✓ Mussel Stream? ☐ Trout Stream? ☐ Tier 3?			Anticipated withdrawal end date: Total Volume from Source (gal):	11/22/2015
				8,800,000
Regulated Stream?			Max. Pump rate (gpm):	1,000
☐ Proximate PSD?			Max. Simultan	eous Trucks: 0
☐ Gauged Stream?			Max, Truck pum	o rate (gpm) 0
Reference Gaug 3155220	SOUTH FORK HUGHE	S RIVER BELOW IV	IACFARLAN, WV	
	229.00		Gauge Threshold (cfs)	: 22

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	42.64	4.42	38.36
2	55.59	4.42	51.32
3	60.88	4.42	56.60
4	34.42	4.42	30.14
5	24.15	4.42	19.87
6	12.98	4.42	8.70
7	6.44	4.42	2.16
8	3.72	4.42	-0.56
9	4.47	4.42	0.19
10	4.85	4.42	0.57
11	14.50	4.42	10.23
12	29.93	4.42	25.65

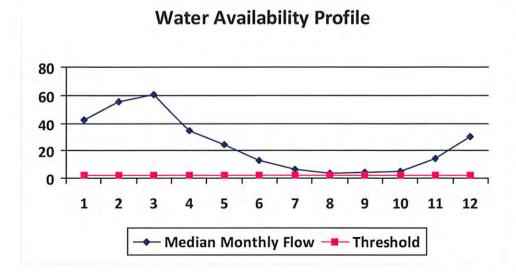

Min. Gauge Reading (cfs): Passby at Location (cfs):	35.23
Ungauged Stream Safety (cfs):	0.36
Headwater Safety (cfs):	0.36
Pump rate (cfs):	2.23
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	1.46

west virginia department of environmental protection



Water Management Plan: **Secondary Water Sources**



WMP-01529

API/ID Number

047-017-06380

Operator:

Antero Resources

Richard Unit 2H

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Lake/Reservior

Source ID: 27302 Source Name

City of Salem Reservior (Lower Dog Run)

Source start date:

11/22/2014

Public Water Provider

Source end date:

11/22/2015

Source Lat:

39.28834

Source Long:

-80.54966

County

Harrison

Max. Daily Purchase (gal)

1,000,000

Total Volume from Source (gal):

8,800,000

WMP-01529 API/ID Number 047-017-06380	Operator:	Antero Resources
---------------------------------------	-----------	------------------

Richard Unit 2H

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 27303 Source Name Pennsboro Lake Source start date: 11/22/2014 Source end date: 11/22/2015

Source Lat: 39.281689 Source Long: -80.925526 County Ritchie

Max. Daily Purchase (gal)

Total Volume from Source (gal):

8,800,000

DEP Comments:

Source ID: 27304 Source Name Powers Lake (Wilderness Water Park Dam) Source start date: 11/22/2014
Private Owner Source end date: 11/22/2015

Source Lat: 39.255752 Source Long: -80.463262 County Harrison

Max. Daily Purchase (gal) Total Volume from Source (gal): 8,800,000

The second secon	Control of the Contro			a company of the manager of the party	
WMP- 01529	API/ID Number	047-017-06380	Operator:	Antero Resources	
	Richa	ard Unit 2H			

Michard Offi

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 27305 Source Name Powers Lake Two Source start date: 11/22/2014

Source end date: 11/22/2015

Source Lat: 39.247604 Source Long: -80.466642 County Harrison

Max. Daily Purchase (gal)

Total Volume from Source (gal): 8,800,000

WMP-01529 API/ID Number 047-017-06380 Operator: Antero Resources

Richard Unit 2H

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Other

Source ID: 27306 Source Name Poth Lake (Landowner Pond) Source start date: 11/22/2014

Private Owner Source end date: 11/22/2015

Source Lat: 39.221306 Source Long: -80.463028 County Harrison

Max. Daily Purchase (gal)

Total Volume from Source (gal): 8,800,000

DEP Comments:

Source ID: 27307 Source Name Williamson Pond (Landowner Pond) Source start date: 11/22/2014

Source end date: 11/22/2015

Source Lat: 39.19924 Source Long: -80.886161 County Ritchie

Max. Daily Purchase (gal)

Total Volume from Source (gal): 8,800,000

WMP-01529

API/ID Number:

047-017-06380

Operator:

Antero Resources

Richard Unit 2H

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 27308 Source Name

Eddy Pond (Landowner Pond)

Source start date:

11/22/2014

Source end date:

11/22/2015

Source Lat:

39.19924

Source Long:

-80.886161

County

Ritchie

Max. Daily Purchase (gal)

Total Volume from Source (gal):

8,800,000

DEP Comments:

Source ID: 27309 Source Name

Source Lat:

Hog Lick Quarry

Industrial Facility

Source start date: Source end date: 11/22/2014 11/22/2015

39.419272

Source Long:

-80.217941

County

Marion

Max. Daily Purchase (gal)

1,000,000

Total Volume from Source (gal):

8,800,000

WMP-01529 API/ID Number 047-017-06380 Operator: Antero Resources

Richard Unit 2H

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 27310 Source Name Glade Fork Mine Source start date: 11/22/2014
Industrial Facility Source end date: 11/22/2015

Source Lat: 38.965767 Source Long: -80.299313 County Upshur

Max. Daily Purchase (gal) 1,000,000 Total Volume from Source (gal): 8,800,000

DEP Comments:

Recycled Frac Water

Source ID: 27311 Source Name Radabaugh Unit 2H Source start date: 11/22/2014


Source end date: 11/22/2015

Source Lat: Source Long: County

Max. Daily Purchase (gal)

Total Volume from Source (gal): 8,800,000



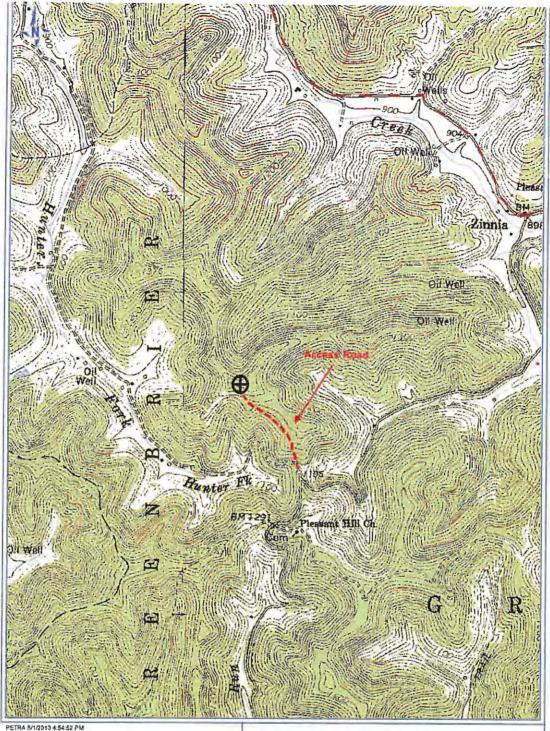

DCN 9-30-2013

= 17 06380

Antero Resources Corp

APPALACHIAN BASIN

Richard Unit 2H

Doddridge County

Received Office of Oil & Gas

REMARKS

QUADRANGLE: BIG ISAAC WATERSHED: STANDINGS RUN OF 2013

MEATHOUSE FORK DISTRICT: GREENBRIER

By: ECM

11/01/2013

