

west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax Earl Ray Tomblin, Governor Randy C. Huffman, Cabinet Secretary www.dep.wv.gov

December 30, 2013

WELL WORK PERMIT

Horizontal 6A Well

This permit, API Well Number: 47-1706420, issued to ANTERO RESOURCES CORPORATION, is evidence of permission granted to perform the specified well work at the location described on the attached pages and located on the attached plat, subject to the provisions of Chapter 22 of the West Virginia Code of 1931, as amended, and all rules and regulations promulgated thereunder, and to all conditions and provisions outlined in the pages attached hereto. Notification shall be given by the operator to the Oil and Gas Inspector at least 24 hours prior to the construction of roads, locations, and/or pits for any permitted work. In addition, the well operator shall notify the same inspector 24 hours before any actual well work is commenced and prior to running and cementing casing. Spills or emergency discharges must be promptly reported by the operator to 1-800-642-3074 and to the Oil and Gas inspector.

Please be advised that form WR-35, Well Operators Report of Well Work is to be submitted to this office within 90 days completion of permitted well work, as should form WR-34 Discharge Monitoring Report within 30 days of discharge of pits, if applicable. Failure to abide by all statutory and regulatory provisions governing all duties and operations hereunder may result in suspension or revocation of this permit and, in addition, may result in civil and/or criminal penalties being imposed upon the operators.

In addition to the applicable requirements of this permit, and the statutes and rules governing oil and gas activity in WV, this permit may contain specific conditions which must be followed. Permit conditions are attached to this cover letter.

Per 35CSR-4-5,2.g this permit will expire in two (2) years from the issue date unless permitted well work is commenced. If there are any questions, please feel free to contact me at (304) 926-0499 ext. 1654.

James Martin

Chief

Operator's Well No: HONEY UNIT 1H

Farm Name: DUFFLEMEYER, MICHAEL B., "E

API Well Number: 47-1706420

Permit Type: Horizontal 6A Well

Date Issued: 12/30/2013

Promoting a healthy environment.

API Number: 17-06420

PERMIT CONDITIONS

West Virginia Code § 22-6A-8(d) allows the Office of Oil and Gas to place specific conditions upon this permit. Permit conditions have the same effect as law. Failure to adhere to the specified permit conditions may result in enforcement action.

CONDITIONS

- This proposed activity may require permit coverage from the United States Army Corps of Engineers (USACOE). Through this permit, you are hereby being advised to consult with USACOE regarding this proposed activity.
- 2. If the operator encounters an unanticipated void, or an anticipated void at an unanticipated depth, the operator shall notify the inspector within 24 hours. Modifications to the casing program may be necessary to comply with W. Va. Code § 22-6A-5a (12), which requires drilling to a minimum depth of thirty feet below the bottom of the void, and installing a minimum of twenty (20) feet of casing. Under no circumstance should the operator drill more than fifty (50) feet below the bottom of the void or install less than twenty (20) feet of casing below the bottom of the void.
- 3. When compacting fills, each lift before compaction shall not be more than 12 inches in height, and the moisture content of the fill material shall be within limits as determined by the Standard Proctor Density test of the actual soils used in specific engineered fill, ASTM D698, Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort, to achieve 95 % compaction of the optimum density. Each lift shall be tested for compaction, with a minimum of two tests per lift per acre of fill. All test results shall be maintained on site and available for review.
- Operator shall install signage per § 22-6A-8g (6) (B) at all source water locations included in their approved water management plan within 24 hours of water management plan activation.
- 5. Oil and gas water supply wells will be registered with the Office of Oil and Gas and all such wells will be constructed and plugged in accordance with the standards of the Bureau for Public Health set forth in its Legislative rule entitled Water Well Regulations, 64 C.S.R. 19. Operator is to contact the Bureau of Public Health regarding permit requirements. In lieu of plugging, the operator may transfer the well to the surface owner upon agreement of the parties. All drinking water wells within fifteen hundred feet of the water supply well shall be flow tested by the operator upon request of the drinking well owner prior to operating the water supply well.
- Pursuant to the requirements pertaining to the sampling of domestic water supply wells/springs the operator shall, no later than thirty (30) days after receipt of analytical data provide a written copy to the Chief and any of the users who may have requested such analyses.
- 7. If any explosion or other accident causing loss of life or serious personal injury occurs in or about a well or well work on a well, the well operator or its contractor shall give notice, stating the particulars of the explosion or accident, to the oil and gas inspector and the Chief, within 24 hours of said accident.
- During the casing and cementing process, in the event cement does not return to the surface, the oil and gas inspector shall be notified within 24 hours.

WW-6B (9/13)

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS WELL WORK PERMIT APPLICATION

1) Well Opera	tor: Antero R	Resources Corporation	494488557	017-Doddridge	New Milton	New Milton
-			Operator ID	County	District	Quadrangle
2) Operator's	Well Number	Honey Unit 1H	Well P	ad Name: Snake	Run Pad	
3) Farm Name	Surface Own	er: Michael Dufflemeye	er et al Public Ro	oad Access: CR	25	
4) Elevation, c	urrent ground	l: ~1113' Ele	evation, propose	d post-construction	n: 1081'	
5) Well Type	(a) Gas	Oil_	Un	derground Storag	e	
	Other					
	(b)If Gas	Shallow	Dеер			D'
		Horizontal				N
6) Existing Pac	i: Yes or No	No				12
	-	on(s), Depth(s), Antici	-			
Marcellus Sh	ale: 7400' TVI), Anticipated Thickness-	60 feet, Associate	ed Pressure- 3250#		
8) Proposed To	otal Vertical D	Depth: 7400' TVD				
9) Formation a	t Total Vertic	al Depth: Marcellus S	Shale			
10) Proposed T	otal Measure	d Depth: 14,500' MD				
11) Proposed H	Iorizontal Leg	Length: 6606'				
12) Approxima	te Fresh Wate	er Strata Depths:	51', 156'			
13) Method to	Determine Fr	esh Water Depths: 0	ffset weil records. D	epths have been adj	usted accord	ing to surface elevations.
14) Approxima	te Saltwater I	Depths: 1194'				
15) Approxima	te Coal Seam	Depths: 201', 435', 74	46, 1080'			
16) Approxima	te Depth to P	ossible Void (coal mir	ne, karst, other):	None anticipated		
		tion contain coal seam t to an active mine?	Yes	No.	7	
(a) If Yes, pro	vide Mine In	fo: Name:				
(-) Pro		Depth:			in the second	
		Seam:				
		Ommore				
RECE Office of O						

DEC 3 0 2013

Page 1 of 3

WV Department of Environmental Protection WW-6B (9/13)

18)

CASING AND TUBING PROGRAM

TYPE	Size	New or Used	Grade	Weight per ft. (lb/ft)	FOOTAGE: For Drilling	INTERVALS: Left in Well	CEMENT: Fill-up (Cu. Ft.)
Conductor	20"	New	H-40	94#	40'	40'	CTS,38 Cu. Ft.
Fresh Water	13-3/8*	New	J-55/H-40	54.5#/ 48#	310'	310'	CTS, 431 Cu. Ft
Coal	9-5/8"	New	J-55	36#	2470'	2470'	CTS,1006 Cu. Ft.
Intermediate							
Production	5-1/2"	New	P-110	20#	14500'	14500'	3589 Cu. Ft.
Tubing	2-3/8"	New	N-80	4.7#		7100'	
Liners							

TYPE	Size	Wellbore Diameter	Wall Thickness	Burst Pressure	Cement Type	Cement Yield (cu. ft./k)
Conductor	20"	24"	0.438"	1530	Class A	1.18
Fresh Water	13-3/8"	17-1/2"	0.38"/0.33"	2730/1730	Class A	1.18
Coal	9-5/8"	12-1/4"	0.352"	3520	Class A	1.18
Intermediate						
Production	5-1/2"	8-3/4" & 8-1/2"	0.361"	12630	Lead-H/POZ & Tail - H	H/POZ-1.44 & H-1.8
Tubing	2-3/8"	4.778"	0.19"	11200		
Liners						

PACKERS

Kind:	N/A	
Sizes:	N/A	
Depths Set:	N/A	

RECEIVED
Office of Oil and Gas

DEC 3 0 2013

WV Department of Environmental Protection Page 2 of 3

Drill, perforate, fracture a new horizontal shallow well and complete Marcellus Shale.	
20) Describe fracturing/stimulating methods in detail, including anticipated max	pressure and max rate:
Antero plans to pump Slickwater into the Marcellus Shale formation in order to ready the be comprised of approximately 99 percent water and sand, with less than 1 percent spec the attached "List of Anticipated Additives Used for Fracturing or Stimulating Well."	
21) Total Area to be disturbed, including roads, stockpile area, pits, etc., (acres):	23.32 acres
22) Area to be disturbed for well pad only, less access road (acres): 4.35 acres	
23) Describe centralizer placement for each casing string:	
Conductor: no centralizers Surface Casing: one centralizer 10' above the float shoe, one on the insert float collar and one every 4th join to surface. Intermediate Casing: one centralizer above float joint, one centralizer 5' above float collar and one every 4th Production Casing: one centralizer at shoe joint and one every 3 joints to top of cement in intermediate casi	collar to surface.
24) Describe all cement additives associated with each cement type:	
ourface: Class A cement with 2% calcium and 1/4 lb flake, 5 gallons of clay treat	

25) Proposed borehole conditioning procedures: Conductor: blowhole clean with air, run casing, 10 bbls fresh water.

Surface: blowhole clean with air, trip to conductor shoe, trip to bottom, blowhole clean with air, trip out, run casing, circulate pipe capacity + 40 bbls fresh water followed by 25 bbls bentonite mud, 10 bbls fresh water spacer.

Production: Lead cement- 50/50 Class H/Poz + 1,5% salt + 1% C-45 + 0.5% C-16a + 0.2% C-12 + 0.45% C-20 + 0.05% C-51 Production: Tail cement- Class H + 45 PPS Calcium Carbonate + 1.0% FL-160 + 0.2% ACGB-47 + 0.05% ACSA-51 + 0.2% ACR-20

Intermediate: blowhole clean with air, trip to surface casing shoe, trip to bottom, blowhole clean with air, trip out, run casing distribute 40 bbls brine water followed by 10 bbls fresh water and 25 bbls bentonite mud, pump 10 bbls fresh water. water followed by 10 bbls fresh water and 25 bbls bentonite mud, pump 10 bbls fresh water.

Production: circulate with 14 lb/gal NaCl mud, trip to middle of lateral, circulate, pump high viscosity sweep, trip to top of curve, trip to bottom, circulate, pump high viscosity sweep, trip to top of curve, trip to bottom, circulate, pump high viscosity sweep, trip out, run casing, circulate 10 bbls fresh water, pump 48 bbls water followed by 10 bbls fresh water and 25 bbls bentonite mud, pump 10 bbls fresh water. barite pill, pump 10 bbls fresh water followed by 48 bbls mud flush and 10 bbls water.

*Note: Attach additional sheets as needed.

Office of Oil and GRE

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION OFFICE OF OIL AND GAS 4701706420

FLUIDS/ CUTTINGS DISPOSAL & RECLAMATION PLAN

Operator Name Antero	Resources Corporation	OP Code 494488557	
Watershed (HUC 10)_M	leathouse Fork Qu	adrangle New Milton	
Elevation 1081	County Doddridge	District New Milton	
Do you anticipate using Will a pit be used? Ye			
	scribe anticipated pit waste.	(Critical and I sentence Flacia will be elemed in lanks. Cultings will be lanked and holded off alia.)	
	sal Method For Treated Pit Wastes:	If so, what ml.? N/A	
Proposed Dispe	Land Application		
	Underground Injection (UIC Permit Numbe	er)
	Reuse (at API Number Future permitted well locat)
	Off Site Disposal (Supply form WW-9 for di Other (Explain	isposal location) (Meadowfill Landfill Permit #SWF-1032	-98)
Will closed loop system	be used? If so, describe: Yes		
Drilling medium anticipa	ated for this well (vertical and horizontal)? Air	, freshwater, oil based, etc. Duniform Foam, Production - Nation Stated Must	_
-If oil based, wi	hat type? Synthetic, petroleum, etc. N/A		_
Additives to be used in d	trilling medium? Please See Attachment		
Drill cuttings disposal m	ethod? Leave in pit, landfill, removed offsite,	etc. Stored in tanks, removed offsite and taken to landfill.	
	d plan to solidify what medium will be used? (4000	
-Landfill or off	site name/permit number? Meadowfill Landfill (Pen	mit #SWF-1032-98)	_
on August 1, 2005, by the provisions of the permit law or regulation can lead I certify under	are enforceable by law. Violations of any ter do to enforcement action. penalty of law that I have personally examin	be of the GENERAL WATER POLLUTION PERMIT Department of Environmental Protection. I understand an or condition of the general permit and/or other applied and am familiar with the information submitted by inquiry of those individuals immediately response turate, and complete. I am aware that there are signine or imprisonment.	that the plicable on this
Company Official (Typ	ed Name) Gerard G. Alberts	No. 103	
Company Official Title	Environmental & Regulatory Manager	May 5,5	al Projection
Subscribed and sworn by	Porshelli,	20IS_LISA BOT TAVELLI Notary Public Totary Public State of Colorado Notary ID 20124072365	
My commission expires	11912016	My Commission Expires Nov 9,	2016

Form WW-9	Operator's Well No. Honey Unit
Antero Resources Corporation	
Proposed Revegetation Treatment: Acres Disturbed 23	3.32 Prevegetation pH
Lime 2-3 Tons/acre or to correct	et to pH 6.5
Fertilizer type Hay or straw or Wood Fiber (will be	e used where needed)
Fertilizer amount 500	lbs/acre
2-3	Tons/acre
	+ New Water Containment Pad (4.10) + New Excess/Toptoil Material Stockpiles (8.42) = 23.32. Ne
	Seed Mixtures
Temporary	Permanent
Seed Type lbs/acre	Seed Type lbs/acre
Annual Ryegrass 40	Crownvetch 10-15
"See attached Table 3 for additional seed type (Snake Run Pad Design Page 18	*See attached Table 4s for additional seed type (Snake Rum Ped Design Page 19)
or type of grass seed requested by surface owner	*or type of grass seed requested by surface owner
NOTE: No Fescue or Timothy Grass sh	hall he used
lan Approved by: Daugles News comments: Picseed & Mulch	for Michael Daff
Dep segulations	
Contact Inspector be	fore construction begins
isle: Bill I Sas suspection RECEIVED Yes ffice of Oil and Gas	Date: 12-30-2011
DEC 3 0 2013	

WV Department of Environmental Protection

Form WW-9 Additives Additives Additives Additives

SURFACE INTERVAL

- 1. Fresh Water
- 2. Soap -Foamer AC
- 3. Air

INTERMEDIATE INTERVAL

STIFF FOAM RECIPE:

- 1) 1 ppb Soda Ash / Sodium Carbonate-Alkalinity Control Agent
- 2) 1 ppb Conqor 404 (11.76 ppg) / Corrosion Inhibitor
- 3) 4 ppb KLA-Gard (9.17 ppg) / Amine Acid Complex-Shale Stabilizer
- 4) 1ppb Mil Pac R / Sodium Carboxymethylcellulose-Filtration Control Agent
- 5) 12 ppb KCL / Potassium Chloride-inorganic Salt
- 6) Fresh Water 80 bbls
- 7) Air

PRODUCTION INTERVAL

- 1. Alpha 1655
 - Salt Inhibitor
 - 2. Mil-Carb
 - Calcium Carbonate
 - 3. Cottonseed Hulls
 - Cellulose-Cottonseed Pellets LCM
 - 4. Mil-Seal
 - Vegetable, Cotton & Cellulose-Based Fiber Blend LCM
 - 5. Clay-Trol
 - Amine Acid Complex Shale Stabilizer
 - 6. Xan-Plex
 - Viscosifier For Water Based Muds
 - Mil-Pac (All Grades)
 - Sodium Carboxymethylcellulose Filtration Control Agent
 - 8. New Drill
 - Anionic Polyacrylamide Copolymer Emulsion Shale Stabilizer
- Caustic Soda
 - Sodium Hydroxide Alkalinity Control
- 10. Mil-Lime
 - Calcium Hydroxide Lime
- 11. LD-9
- Polyether Polyol Drilling Fluid Defoamer
- 12. Mil Mica
 - Hydro-Biotite Mica LCM

ECCENSO

13. Escaid 110

4701706420

Drilling Fluild Solvent - Aliphatic Hydrocarbon

14. Ligco

Highly Oxidized Leonardite - Filteration Control Agent

15. Super Sweep

Polypropylene - Hole Cleaning Agent

16. Sulfatrol K

Drilling Fluid Additive - Sulfonated Asphalt Residuum

17. Sodium Chloride, Anhydrous

Inorganic Salt

18. D-D

Drilling Detergent - Surfactant

19, Terra-Rate

Organic Surfactant Blend

20. W.O. Defoam

Alcohol-Based Defoamer

21. Perma-Lose HT

Fluid Loss Reducer For Water-Based Muds

22, Xan-Plex D

Polysaccharide Polymer - Drilling Fluid Viscosifier

23. Walnut Shells

Ground Cellulosic Material - Ground Walnut Shells - LCM

24. Mil-Graphite

Natural Graphite - LCM

25. Mil Bar

Barite - Weighting Agent

26. X-Cide 102

Biocide

27. Soda Ash

Sodium Carbonate - Alkalinity Control Agent

28. Clay Trol

Amine Acid complex - Shale Stabilizer

29, Sulfatrol

Sulfonated Asphalt - Shale Control Additive

30. Xanvis

Viscosifier For Water-Based Muds

31. Milstarch

Starch - Fluid Loss Reducer For Water Based Muds

32. Mil-Lube

Drilling Fluid Lubricant

Secemed



Well Site Safety Plan Antero Resources

Well Name: Dufflemeyer Unit 1H, Dufflemeyer Unit 2H,

Honey Unit 1H, Honey Unit 2H, Asena Unit 1H,

Asena Unit 2H

Pad Location: Snake Run Pad

Doddridge County/ New Milton District

GPS Coordinates: Lat 39°12'17.52"/Long -80°39'3.68" (NAD83)

Driving Directions:

From New Milton:

Head SW on CO Route 25/ Meathouse Fork Rd. for 3.8 miles until past the intersection with CO Route 25/8 Snake Run Branch. Access Road will be on left.

RECEIVED
Office of Oil and Gas

DEC N 0 2013

WV Department of Environmental Protection 12-30-2013

west virginia department of environmental protection



Water Management Plan: Primary Water Sources



WMP-01681

API/ID Number:

047-017-06420

Operator:

Antero Resources

Honey Unit 1H

Important:

For each proposed primary water source (including source intakes for purchased water sources) identified in your water management plan, and summarized herein, DEP has made an evaluation concerning water availability over the specified date range. DEP's assessment is based on the following considerations:

- Statistical analysis of historical USGS stream gauge data (transferred to un-gauged locations as necessary);
- Identification of sensitive aquatic life (endangered species, mussels, etc.);
- Quantification of known existing demands on the water supply (Large Quantity Users);
- . Minimum flows required by the Army Corps of Engineers; and
- Designated stream uses.

Based on these factors, DEP has provided, for each intake location (and origination point for purchased water), a reference gauge location and discharge flow reading which must be surpassed prior to withdrawals. Additionally, DEP has established a minimum passby flow at the withdrawal location which must also be surpassed prior to withdrawals. These thresholds are considered terms of the permit and are enforceable as such.

DEP is aware that some intake points will be used for multiple wells and well sites. In these cases, the thresholds set by the Water Management Plan are to be interepreted as total withdrawal limits for each location over the specified date range regardless of how many wells are supported by that intake.

For all purchased water intakes, determinations of water availability are made at the original source intake location. It is the responsibility of the Oil and Gas Operator, not the seller, to cease withdrawal of water from the seller when flows are less than the minimum gauge reading at the stream gauge referenced by the Water Management Plan in order to protect stream uses.

Note that the determinations made herein are based on the best available data, but it is impossible to predict water availability in the future. While the DEP has carefully established these minimum withdrawal thresholds, it remains the operator's responsibility to protect aquatic life at all times. Approval to withdrawal is contingent upon permission from the land owner. It is the responsibility of the operator to secure and maintain permission prior to any withdrawals.

The operator is reminded that 24-48 hours prior to withdrawing (or purchasing) water, DEP must be notified by email at DEP.water.use@wv.gov.



Source Summary

WMP-01681

API Number:

047-017-06420

Operator:

Antero Resources

Honey Unit 1H

Stream/River

n Source

Ohio River @ Ben's Run Withdrawal Site

Tyler.

Owner:

Ben's Run Land Company

Limited Partnership

Start Date

End Date

Total Volume (gal) Max. daily purchase (gal)

9999999

Intake Latitude: Intake Longitude:

6/24/2014

6/24/2015

7,170,000

39.46593

-81.110781

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID:

Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm):

3,360

Min. Gauge Reading (cfs):

6,468.00

Min. Passby (cfs)

DEP Comments:

Refer to the specified station on the National Weather Service's Ohio River forecast website: http://www.erh.noaa.gov/ohrfc//flows.shtml

■ Source

West Fork River @ JCP Withdrawal

Harrison

Owner:

James & Brenda Raines

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

39.320913

Intake Latitude: Intake Longitude: -80.337572

6/24/2014

6/24/2015

7,170,000

3061000

WEST FORK RIVER AT ENTERPRISE, WV

Max. Pump rate (gpm):

2,000

Regulated Stream? Stonewall Jackson Dam Ref. Gauge ID:

Min. Gauge Reading (cfs):

175.00

Min. Passby (cfs)

146.25

DEP Comments:

Source

West Fork River @ McDonald Withdrawal

Harrison

Owner:

David Shrieves

Start Date 6/24/2014 End Date 6/24/2015

7,170,000

Total Volume (gal) Max. daily purchase (gal)

Intake Latitude: Intake Longitude: 39.16761

-80.45069

Regulated Stream? Stonewall Jackson Dam Ref. Gauge ID:

3061000

WEST FORK RIVER AT ENTERPRISE, WV

Max. Pump rate (gpm):

3,000

Min. Gauge Reading (cfs):

175.00

Min. Passby (cfs)

106.30

Harrison

Owner:

David Shrieves

West Fork River @ GAL Withdrawal

Source

Source Tom's Fork @ Erwin With	drawal Doddridge	Owner: John F. Erwin and Sandra E. Erwin
Start Date End Date 6/24/2014 6/24/2015	Total Volume (gal) Max. daily purchase (gal) 7,170,000	Intake Latitude: Intake Longitude: 39.174306 -80.702992
☐ Regulated Stream?	Ref. Gauge (D: 3114500	MIDDLE ISLAND CREEK AT LITTLE; WV
Max. Pump rate (gpm): 1,000	Min. Gauge Reading (cfs): 69.73	Min. Passby (cfs) 0.59
DEP Comments:		
s Source Arnold Creek @ Davis Wit	thdrawal Doddridge	Owner: Jonathon Davis
Start Date End Date 6/24/2014 6/24/2015	Total Volume (gal) Max. daily purchase (gai) 7,170,000	Intake Latitude: Intake Longitude: 39,302006 -80.824561
☐ Regulated Stream?	Ref. Gauge ID: 3114500	MIDDLE ISLAND CREEK AT LITTLE, WV
Max. Pump rate (gpm): 1,000	Min. Gauge Reading (cfs): 69.73	Min. Passby (cfs) 3.08
DEP Comments:		
o Source Buckeye Creek @ Powell	Withdrawal Doddridge	Owner: Dennis Powell
Start Date End Date 6/24/2014 6/24/2015	Total Volume (gal) Max. daily purchase (gal) 7,170,000	intake Latitude: intake Longitude: 39.277142 -80.690386
Regulated Stream?	Ref. Gauge ID: 3114500	MIDDLE ISLAND CREEK AT LITTLE, WV
Max. Pump rate (gpm): 1,000	Min. Gauge Reading (cfs): 69.73	Min. Passby (cfs) 4.59
	A CONTRACTOR OF THE PROPERTY O	The second second

@ Source South Fork of Hughes River @ Knight Withdrawal Ritchie Owner: Tracy C. Knight & Stephanie C. Knight Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: 6/24/2014 6/24/2015 7,170,000 39.198369 -80.870969 Regulated Stream? OUTH FORK HUGHES RIVER BELOW MACFARLAN, WI Ref. Gauge ID: 3155220 Max. Pump rate (gpm): 3,000 Min. Gauge Reading (cfs): 39.80 Min. Passby (cfs) 1.95 **DEP Comments:** North Fork of Hughes River @ Davis Withdrawal Ritchie Lewis P. Davis and Norma Source Owner: J. Davis Start Date End Date Max. daily purchase (gal) Total Volume (gal) Intake Latitude: Intake Longitude: 6/24/2014 6/24/2015 7,170,000 39.322363 -80.936771 Regulated Stream? **JOUTH FORK HUGHES RIVER BELOW MACFARLAN, WI** Ref. Gauge ID: 3155220 Max. Pump rate (gpm): 1,000 Min. Gauge Reading (cfs): 35.23 Min. Passby (cfs) 2.19 DEP Comments:

Source Summary

WMP-01681

API Number:

047-017-06420

Operator:

Antero Resources

Honey Unit 1H

Purchased Water

o Source

Ohio River @ Select Energy

Pleasants

Owner:

Select Energy

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

6/24/2014

6/24/2015

7,170,000

500,000

39.346473

-81.338727

✓ Regulated Stream?

Ohio River Min. Flow Ref. Gauge ID:

9999998

Ohio River Station: Racine Dam

Max. Pump rate (gpm):

1,680

Min. Gauge Reading (crs):

7,216.00

Min. Passby (cfs)

DEP Comments:

Refer to the specified station on the National Weather Service's Ohio River forecast.

website: http://www.erh.noaa.gov/ohrfc//flows.shtml

Middle Island Creek @ Solo Construction

Pleasants

Owner:

Solo Construction, LLC

Start Date 6/24/2014

End Date 6/24/2015 Total Volume (gal) 7,170,000

Max. daily purchase (gal) 1,000,000

Intake Latitude: Intake Longitude: 39.399094

-81.185548

Regulated Stream?

Ohio River Min. Flow Ref. Gauge 1D: 9999999

Ohlo River Station: Willow Island Lock & Dam

Max, Pump rate (gpm);

Min. Gauge Reading (cfs):

6,468.00

Min. Passby (cfs)

DEP Comments:

Elevation analysis indicates that this location has the same elevation as Middle Island Creek's pour point into the Ohio River. As such, it is deemed that water flow at this

location is heavily influenced by the Ohio River.

Source

Claywood Park PSD

Wood

Owner:

Claywood Park PSD

Start Date

End Date

Total Volume (gal) Max. daily purchase (gal) 7,170,000

Intake Latitude: Intake Longitude:

6/24/2014

6/24/2015

Ref. Gauge ID:

9999998

Ohio River Station: Racine Dam

Max. Pump rate (gpm):

Regulated Stream?

Min. Gauge Reading (cfs):

7,216.00

Min. Passby (cfs)

DEP Comments:

Elevation analysis indicates that this location has approximately the same elevation as Little Kanawha's pour point into the Ohio River. As such, it is deemed that water flow

at this location is heavily influenced by the Ohio River.

Source Sun Valley Public Service District

Harrison Owner:

Sun Valley PSD

Start Date End Date

Total Volume (gal) Max. daily purchase (gal)

200,000

Intake Latitude: Intake Longitude:

6/24/2014 6/24/2015

7,170,000

Regulated Stream? Stonewall Jackson Dam Ref. Gauge ID: 3061000 WEST FORK RIVER AT ENTERPRISE, WV

Max. Pump rate (gpm):

Min. Gauge Reading (cfs): 171.48

Min. Passby (cfs)

WMP-01681 API/ID Number: 047-0			047-017-0 ey Unit 1H	06420 Operato	r: Antero R	esources		
iource li): 31259 Sou	perator or	River @ Select Energ	у	S	ource Latitude: 39.3	46473	
			Energy		So	urce Longitude: -81.	338727	
	HUC-8 Code: Drainage Area (5030201 sq. mi.): , 2500	O County:	Pleasants		drawal start date:	6/24/2014 6/24/2015	
-	Endangered Species? Mussel Stream?				7,170,000			
-	Trout Stream? Tier 3? Regulated Stream? Ohio River Min. Flow		Max.	Pump rate (gpm):	1,680			
-	oximate PSD?					Max. Simultaneous	Trucks:	
✓ Gauged Stream?					Max. Truck pump rate (gpm)			
	Reference Gaug	9999998	Ohio River Station:	Racine Dam			100000000000000000000000000000000000000	
	Drainage Area (sq	1 7		racine buil	Gau	ge Threshold (cfs):	7216	
Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)					
1	50,956.00		water itisi					
2	54,858.00							
3	73,256.00							
4	62,552.00	-						
5	43,151.00	-	a 1					
6	27,095.00		-					
7	17,840.00	-	-					
8	14,941.00	+						
9	14,272.00	-	-					
10	17,283.00 29,325.00	2						
12	46,050.00		0					
146.11	w	ater Availa	bility Profile		Water	Availability Assessme	ent of Locatio	
					Base T	hreshold (cfs):		
80000	1				Upstre	am Demand (cfs):	0.00	
60000	/	-			Downs	tream Demand (cfs):	0.00	
40000			ulated by the Ar			rate (cfs):	3.74	
	maintain th		aranteed flow re	/		rater Safety (cfs):	0.00	
20000		8	***	-			100	
)	0 0		-	Ungau	ged Stream Safety (cf	s): 0.00	

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.


- Median Monthly Flow - Threshold

11 12

Min. Gauge Reading (cfs): Passby at Location (cfs):

	WMP-0	01681	API/ID Number	r: 047-017-0642 oney Unit 1H	O Operator: Antero	Resources
Source II	D: 31260 Sou	juga- m	dle Island Creek @ S	Solo Construction	Source Latitude: 3	S. 141 - S. S. MANI
		Solo	Construction, LLC		Source Longitude: -	81.185548
	HUC-8 Code: Drainage Area (Pleasants	Anticipated withdrawal start date: Anticipated withdrawal end date:	6/24/2014 6/24/2015
_	☐ Endangered Species? ☑ Mussel Stream? ☐ Trout Stream? ☐ Tier 3?				Total Volume from Source (gal):	7,170,000
Regulated Stream? Ohio River Min. Flow					Max. Pump rate (gpm):	
	oximate PSD?	City of St. N	Carrie Cost As		Max. Simultaine	gus Trucks:
	uged Stream?	City of St. 1	10.10		Max, Truck pump	
	Reference Gaug Drainage Area (sq	9999999 j. mi.) 25,0	00.00	on: Willow Island Loc		22.1
	Reference Gaug Drainage Area (sq <u>Median</u> monthly flow	-	Estimated Available	on: Willow Island Loc	k & Dam	22.1
Month	Reference Gaug Drainage Area (sq <u>Median</u> <u>monthly flow</u> (cfs)	mi.) 25,0	000.00 Estimated	on: Willow Island Loc	k & Dam	22.1
Month 1	Reference Gaug Drainage Area (sq Median monthly flow (cfs) 45,700.00	mi.) 25,0	Estimated Available	on: Willow Island Loc	k & Dam	22.1
Month 1 2	Reference Gaug Drainage Area (sq Median monthly flow (cfs) 45,700.00 49,200.00	mi.) 25,0	Estimated Available	on: Willow Island Loc	k & Dam	22.1
Month 1 2 3	Reference Gaug Drainage Area (sq Median monthly flow (cfs) 45,700.00 49,200.00 65,700.00	mi.) 25,0	Estimated Available	on: Willow Island Loc	k & Dam	22.1
Month 1 2 3 4	Reference Gaug Drainage Area (sq Median monthly flow (cfs) 45,700.00 49,200.00 65,700.00 56,100.00	mi.) 25,0	Estimated Available	on: Willow Island Loc	k & Dam	22.1
Month 1 2 3 4 5	Reference Gaug Drainage Area (sq Median monthly flow (cfs) 45,700.00 49,200.00 65,700.00 56,100.00 38,700.00	mi.) 25,0	Estimated Available	on: Willow Island Loc	k & Dam	22.1
Month 1 2 3 4	Reference Gaug Drainage Area (sq Median monthly flow (cfs) 45,700.00 49,200.00 65,700.00 56,100.00	mi.) 25,0	Estimated Available	on: Willow Island Loc	k & Dam	22.1
Month 1 2 3 4 5 6	Reference Gaug Drainage Area (sq Median monthly flow (cfs) 45,700.00 49,200.00 65,700.00 56,100.00 38,700.00 24,300.00	mi.) 25,0	Estimated Available	on: Willow Island Loc	k & Dam	22.1
Month 1 2 3 4 5 6 7	Reference Gaug Drainage Area (sq Median monthly flow (cfs) 45,700.00 49,200.00 65,700.00 56,100.00 38,700.00 24,300.00 16,000.00	mi.) 25,0	Estimated Available	on: Willow Island Loc	k & Dam	22.1
Month 1 2 3 4 5 6 7 8	Reference Gaug Drainage Area (sq Median monthly flow (cfs) 45,700.00 49,200.00 65,700.00 56,100.00 38,700.00 24,300.00 16,000.00 13,400.00	mi.) 25,0	Estimated Available	on: Willow Island Loc	k & Dam	22.1
Month 1 2 3 4 5 6 7 8	Reference Gaug Drainage Área (sq Median monthly flow (cfs) 45,700.00 49,200.00 65,700.00 56,100.00 38,700.00 24,300.00 16,000.00 13,400.00 12,800.00	mi.) 25,0	Estimated Available	on: Willow Island Loc	k & Dam	22.1




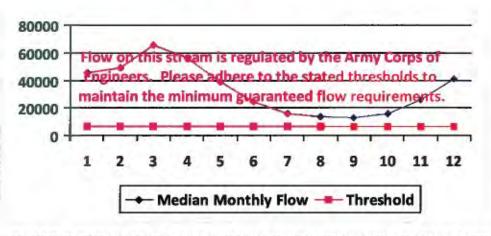

Water Availability Assessment of Location

Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

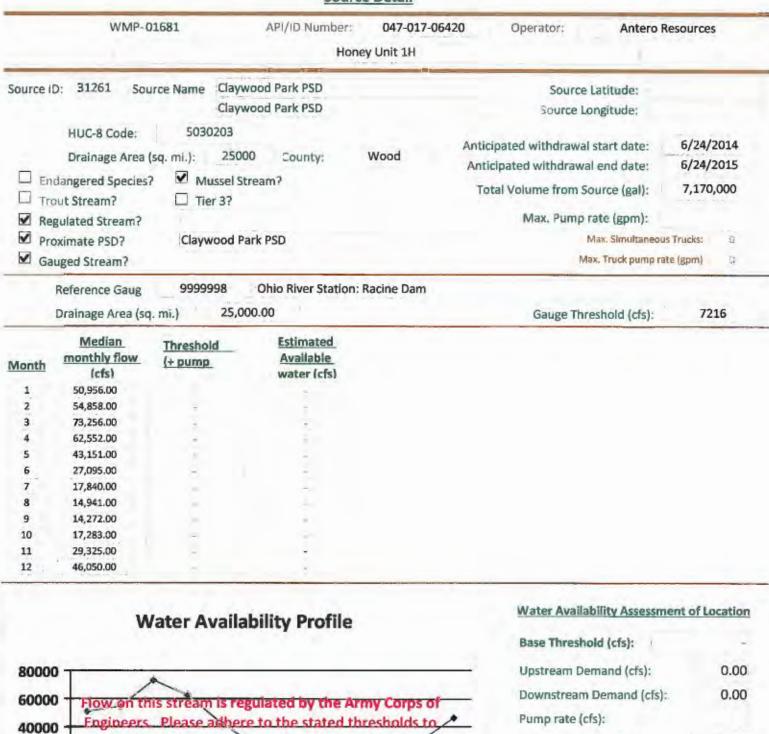

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

10

Threshold

11

12

maintain the minimum guaranteed flow requirements.

Median Monthly Flow

20000

0

1

2


0.00

0.00

Headwater Safety (cfs):

Ungauged Stream Safety (cfs):

Min. Gauge Reading (cfs): Passby at Location (cfs):

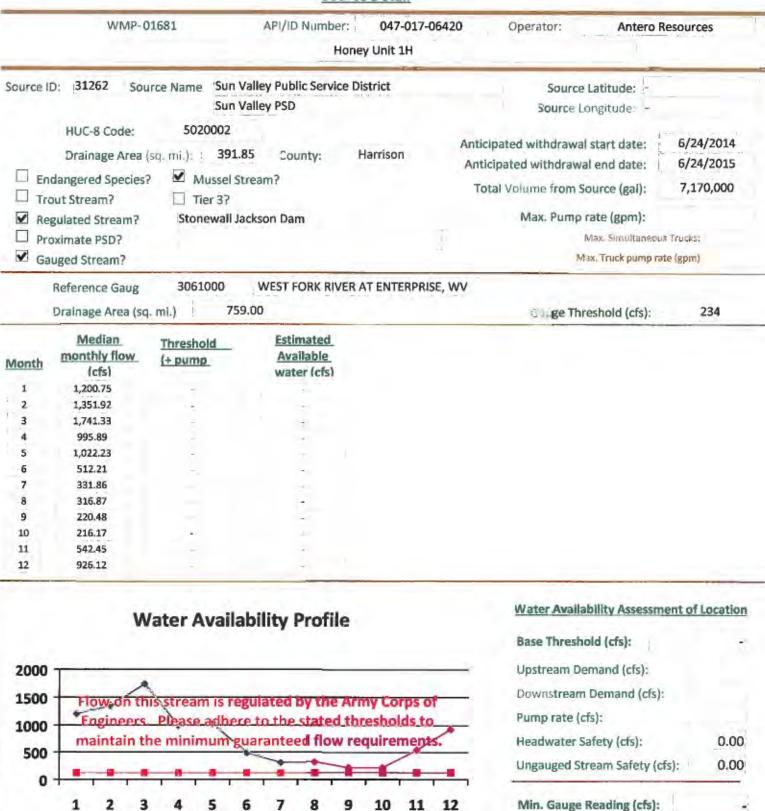


"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

Threshold

Median Monthly Flow

Passby at Location (cfs):

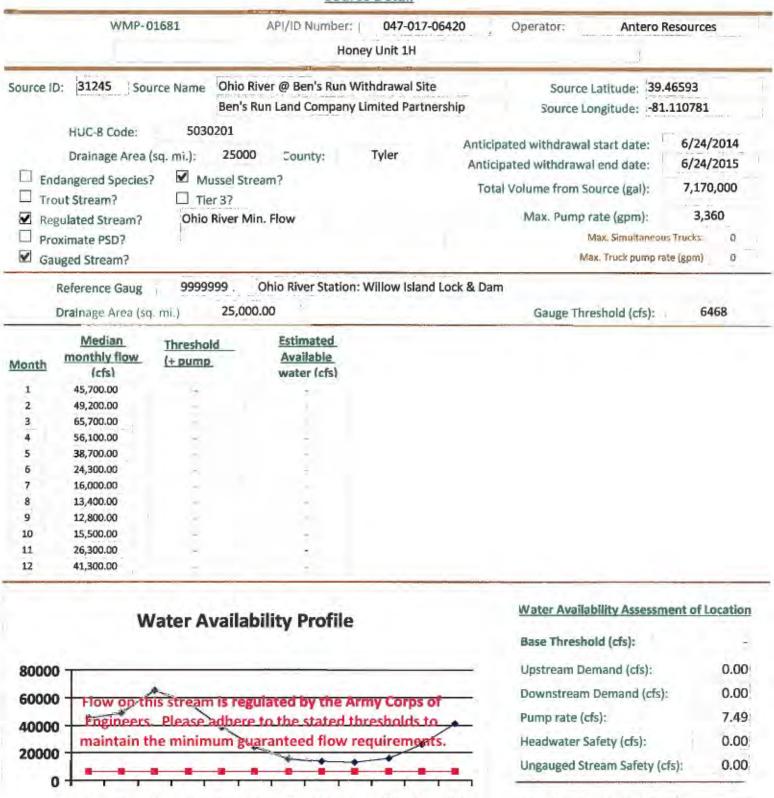

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

11

10

Threshold

12


Min. Gauge Reading (cfs):

Passby at Location (cfs):

Median Monthly Flow


1

2

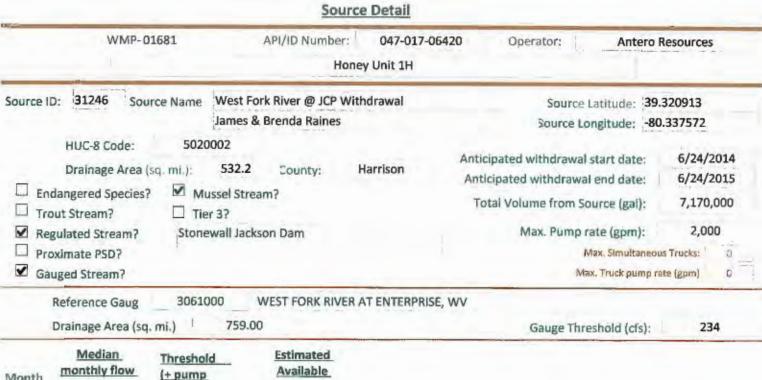

Month	Median monthly flow (cfs)	Threshold (+ pump	Available water (cfs)
1	1,630.82	4	
2	1,836.14	-	19
3	2,365.03	4	13
4	1,352.59	8	-
5	1,388.37	- 2	9
6	695.67		-
7	450.73	-	
8	430.37		
9	299.45		-
10	293.59		9" 1
11	736.74	-	9
12	1,257.84	-	7

Water Availability Profile

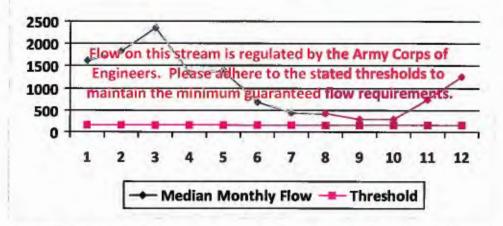

Water Availability Assessment of Location

Base Threshold (cfs):	-
Upstream Demand (cfs):	24.29
Downstream Demand (cfs):	0.00
Pump rate (cfs):	4.46
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	
Passby at Location (cfs):	

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

	WMP-0	1681	API/ID Number	047-017-0642 oney Unit 1H	O Operator: Antero	Resources
ource II		David	Fork River @ McD Shrieves	onald Withdrawal	Source Latitude: 35	MALE MARKET PARTY
☐ Tro	HUC-8 Code: Drainage Area (dangered Species) out Stream? gulated Stream? oximate PSD?		ream?	Harrison	Anticipated withdrawal start date: Anticipated withdrawal end date: Total Volume from Source (gal): Max. Pump rate (gpm): Max. Simultaneo	The state of the s
	uged Stream?	2051000	WEST FORK BIN	ED AT ENTERDRICE W	Max. Truck pump	rate (gpm) 0
	Reference Gaug Drainage Area (sq	3061000 , mi.) 759		ER AT ENTERPRISE, V	Gauge Threshold (cfs):	234
Vionth	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)			
1	964.98	-	Water telar			
2	1,086.47	-	-			
3	1,399.42	-				
4	800.34	41	14			
5	821.52	44	-			
6	411.64					
7	266.70	71	1.5			
8	254.66		- 4			
9	177.19	-00	-			
10	173.72	31	14			
11	435.94	-	9			
12	744.28					
	W	later Availa	bility Profile		Water Availability Assess	ment of Locatio
		atel Availa	Dinty Profile		Base Threshold (cfs):	
1500	-				- Upstream Demand (cfs):	24.29
2500	/					- 11000
	Flowion th	is stream is res	ulated by the	Army Corns of	Downstream Demand (cfs	s): 0.00

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

10 11

12

9

Flow on this stream is regulated by the Army Corps of

Engineers. Please-adhere to the stated thresholds to

6

Median Monthly Flow - Threshold

5

guaranteed flow requirem

1000

500

1

2

3

6.68

24.27

0.00

Pump rate (cfs):

Headwater Safety (cfs):


Ungauged Stream Safety (cfs):

Min. Gauge Reading (cfs): Passby at Location (cfs):

Source Detail WMP-01681 API/ID Number: 047-017-06420 Operator: Antero Resources Honey Unit 1H Source Name West Fork River @ GAL Withdrawal Source Latitude: 39.16422 31248 Source ID: David Shrieves Source Longitude: -80.45173 5020002 HUC-8 Code: 6/24/2014 Anticipated withdrawal start date: 313.67 Harrison Drainage Area (sq. mi.): County: 6/24/2015 Anticipated withdrawal end date: ✓ Mussel Stream? **Endangered Species?** Total Volume from Source (gal): 7,170,000 Trout Stream? ☐ Tier 3? 2,000 Max. Pump rate (gpm): Stonewall Jackson Dam Regulated Stream? Max. Simultaneous Trucks: Proximate PSD? Max. Truck pump rate (gpm) G. Gauged Stream? 3061000 WEST FORK RIVER AT ENTERPRISE, WV Reference Gaug Drainage Area (sq. mi.) 234 759.00 Gauge Threshold (cfs):

Month	Median monthly flow (cfs)	Threshold (+ pump	Available water (cfs)	
1	961.18	8	-	
2	1,082.19	0.	-	
3	1,393.91	14	2	
4	797.19	2	-	
5	818.28	9	-	
6	410.02		-	
7	265.65	15	-	
8	253.65		-	
9	176.49	-		
10	173.04		4	
11	434.22		-	
12	741.35	_	*	



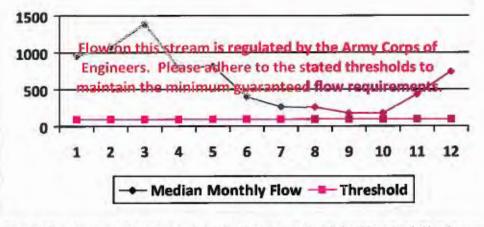

Water Availability Assessment of Location

Base Threshold (cfs):	. =
Upstream Demand (cfs):	24.29
Downstream Demand (cfs):	0.00
Pump rate (cfs):	4.46
Headwater Safety (cfs):	24.18
Ungauged Stream Safety (cfs):	0.00

Min. Gauge Reading (cfs): Passby at Location (cfs): -

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.


Source Detail WMP-01681 API/ID Number: 047-017-06420 Operator: Antero Resources Honey Unit 1H Middle Island Creek @ Mees Withdrawal Site Source Latitude: 39.43113 Source ID: |31249 Source Name Sarah E. Mees Source Longitude: -81.079567 5030201 HUC-8 Code: 6/24/2014 Anticipated withdrawal start date: 484.78 Drainage Area (sq. mi.): County: Pleasants Anticipated withdrawal end date: 6/24/2015 Endangered Species? ✓ Mussel Stream? Total Volume from Source (gal): 7,170,000 Trout Stream? ☐ Tier 3? Max. Pump rate (gpm): 3,360 Regulated Stream? Proximate PSD? Max. Simultaneous Trucks: Gauged Stream? Max. Truck pump rate (gpm) c 3114500 MIDDLE ISLAND CREEK AT LITTLE, WV Reference Gaug

Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	519.88	55.12	465.14
2	653.95	55.12	599.22
3	731.75	55.12	677.01
4	543.38	55.12	488.65
5	286.64	55.12	231.90
6	100.10	55.12	45.36
7	56.65	55.12	1.91
8	46.64	55.12	-8.10
9	23.89	55.12	-30.85
10	30.01	55.12	-24.72
11	146.56	55.12	91.83
12	358.10	55.12	303.37

Drainage Area (sq. ml.)

Water Availability Profile

458.00

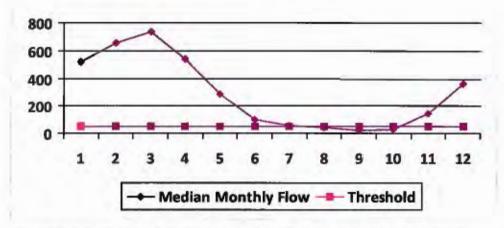

Water Availability Assessment of Location

Gauge Threshold (cfs):

45

Min. Gauge Reading (cfs): Passby at Location (cfs):	52.49 47.63
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	0.00
Pump rate (cfs):	7.49
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	47.63


"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

	WMP-0	1681	API/ID Number:	047-017-0642	Operator:	Antero Re	esources
			Hone	y Unit 1H		1	
Source II	D: 31250 Soc	irce Name	Middle Island Creek @ Daw Gary D. and Rella A. Dawson	And the last of th		Latitude: 39.3	-
☐ Tro	HUC-8 Code: Drainage Area (dangered Species) out Stream? gulated Stream?	Mu Mu	201 181.34 County: ssel Stream? r 3?	Tyler	Anticipated withdrawal Anticipated withdrawa Total Volume from So Max. Pump (l end date: ource (gal):	6/24/2019 6/24/2019 7,170,000 3,000
☐ Pro	oximate PSD? uged Stream?					Max. Simultaneous ax. Truck pump rate	
Month	Median monthly flow	Threshol	Available		Gauge Thr	eshold (cfs):	45
1	(cfs) 194.47	42.06	water (cfs) 152.68				
3	244.62 273.72	42.06 42.06	202.83 231.93				
5	203.26 107.22	42.06 42.06	161.47 65.43				
6 7	37.44 21.19	42.06 42.06	4.35 -20.60				
9	17.45 8.94	42.06 42.06	-24.34 -32.85				
10 11	11.23 54.82	42.06 42.06	-30.56 13.04				

Water Availability Profile

92.17

42.06

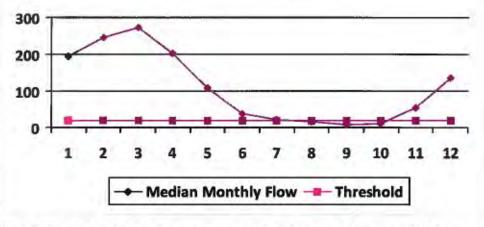

Water Availability Assessment of Location

Min. Gauge Reading (cfs): Passby at Location (cfs):	76.03 28.82
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	4.45
Pump rate (cfs):	6.68
Downstream Demand (cfs):	6.55
Upstream Demand (cfs):	13.10
Base Threshold (cfs):	17.82

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.


12

	WMP-0	01681	API/ID Number:	047-017-064	120 Operator:	Antero R	Resources	
			Но	ney Unit 1H				
Source I	D: 31251 Sou	irce Name McElro	y Creek @ Forest	Withdrawal	Source	Latitude: 39.	39675	
		Forest	C. & Brenda L. Mo	ore	Source L	ongitude: 1-80.	.738197	
	HUC-8 Code:	5030201						
		The second second		+ 100	Anticipated withdrawa	start date:	6/24/2014	
	Drainage Area	(sq. mi.): 88.85	County:	Tyler	Anticipated withdrawa	al end date:	6/24/2015	
En	dangered Species	? Unussel Stre	eam?		Total Volume from S		7,170,000	
□ Tri	out Stream?	☐ Tier 3?			Total volume from 5	ource (gar):	7,170,000	i
□ Re	guiated Stream?	1-200			Max. Pump	rate (gpm):	1,000	
-	oximate PSD?	j:		· · · · · · · · · · · · · · · · · · ·		Max. Simultaneou	s Trucks: 0	
						lax, Truck pump ra		-
L Ga	uged Stream?			-		ion, Truck pump ta	te (Bhard	
	Reference Gaug	3114500	MIDDLE ISLAND	CREEK AT LITTLE, V	WV			
	Drainage Area (sq	ı. mi.) 458,0	00		Gauge Thi	reshold (cfs):	45	
Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)					
1	95.28	19.78	75.68					
2	119.86	19.78	100.25					
3	134.11	19.78	114.51					
4	99.59	19.78	79.99					
5	52.54	19.78	32.93					
6	18.35	19.78	-1.26					
7	10.38	19.78	-9.22					
8	8.55	19.78	-11.05					
9	4.38	19.78	-15.23					
10	5.50	19.78	-14.10					
11	26.86	19.78	7.26					



19.78

46.03

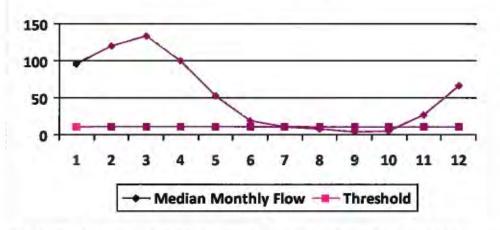

Water Availability Assessment of Location

Min. Gauge Reading (cfs): Passby at Location (cfs):	74.19 13.09
Ungauged Stream Safety (cfs):	2.18
Headwater Safety (cfs):	2.18
Pump rate (cfs):	2.23
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	4.46
Base Threshold (cfs):	8.73

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

12

	WMP-0	1681		API/ID Numbe		20 Operator:	Antero	Resources
					loney Unit 1H			
Source II	D: 31252 Sou	rce Name	Meathou	se Fork @ Gag	gnon Withdrawal	Sou	rce Latitude: 39.	26054
			George L	. Gagnon and	Susan C. Gagnon	Source	e Longitude: -80	.720998
	HUC-8 Code: Drainage Area (60.6	County:	Doddridge	Anticipated withdra		6/24/2014 6/24/2015
		ussel Strea er 3?	sel Stream?		Total Volume fro		7,170,000	
☐ Re	gulated Stream? oximate PSD?	1)	Max. Pur	mp rate (gpm): Max. Simultaneou	1,000 us Trucks: 0
	ouged Stream?						Max. Truck pump ra	ate (gpm) 0
	Reference Gaug	3114	500 N	AIDDLE ISLAND	CREEK AT LITTLE, V	vv		
	Drainage Area (sq	. mi.)	458.00			Garage	Threshold (cfs):	45
Month	Median monthly flow (cfs)	Thresho (+ pump		Estimated Available water (cfs)				
1	64.99	13.39		51.70				
2	81.75	13.39		68.46				
3	91.47	13.39		78.19				
4	67.93	13.39		54.64				
5	35.83	13.39		22.55				
6	12.51	13.39		-0.77				
7	7.08	13.39		-6.20				
8	5.83	13.39		-7.45				
9	2.99	13.39		-10.30				

Water Availability Profile

-9.53


5.04

31.48

13.39

13.39

13.39

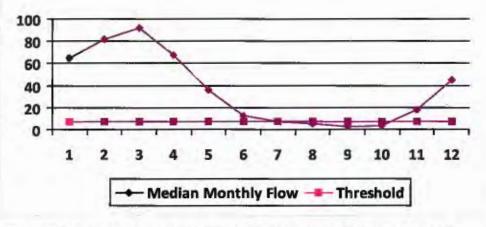

Water Availability Assessment of Location

Passby at Location (cfs):	11.74
Min. Gauge Reading (cfs):	71.96
Ungauged Stream Safety (cfs):	1.49
Headwater Safety (cfs):	1.49
Pump rate (cfs):	2.23
Downstream Demand (cfs):	2.81
Upstream Demand (cfs):	2.23
Base Threshold (cfs):	5.95

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

10

11

12

3.75

18.32

Source Detail WMP-01681 API/ID Number: 047-017-06420 Operator: Antero Resources Honey Unit 1H Source ID: 31253 Source Name | Meathouse Fork @ Whitehair Withdrawal Source Latitude: 39.211317 Elton Whitehair Source Longitude: -80.679592 5030201 HUC-8 Code: Anticipated withdrawal start date: 6/24/2014 30.37 Drainage Area (sq. ml.): County: Doddridge 6/24/2015 Anticipated withdrawal end date: **Endangered Species?** ✓ Mussel Stream? Total Volume from Source (gal): 7,170,000 Trout Stream? Tier 3? Max. Pump rate (gpm): 1,000 Regulated Stream? Max. Simultaneous Trucks: Proximate PSD? Gauged Stream? Max. Truck pump rate (gpm)


MIDDLE ISLAND CREEK AT LITTLE, WV

	Drainage Area (so	, mi.) 458	3.00	Gauge Threshold (cfs):
Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)	
1	32.57	6.70	26.15	
2	40.97	6.70	34.55	
3	45.84	6.70	39.42	
4	34.04	6.70	27.62	
5	17.96	6.70	11.54	
6	6.27	6.70	-0.15	
7	3.55	6.70	-2.87	
8	2.92	6.70	-3.50	
. 9	1.50	6.70	-4.92	
10	1.88	6.70	-4.54	
11	9.18	6,70	2.76	
12	22.43	6.70	16.01	

Water Availability Profile

3114500

Reference Gaug

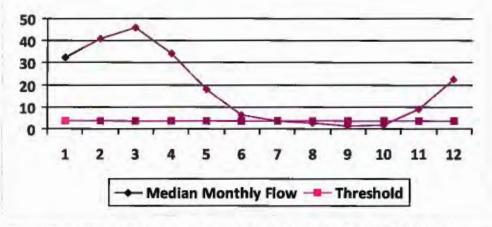

Water Availability Assessment of Location

45


Min. Gauge Reading (cfs): Passby at Location (cfs):	69.73 7.29
Ungauged Stream Safety (cfs):	0.75
Headwater Safety (cfs):	0.75
Pump rate (cfs):	2.23
Downstream Demand (cfs):	2.81
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	2.98

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

Source Detail WMP-01681 API/ID Number: 047-017-06420 Operator: Antero Resources Honey Unit 1H Source ID: 31254 Source Name Tom's Fork @ Erwin Withdrawal Source Latitude: 39.174306 John F. Erwin and Sandra E. Erwin Source Longitude: '-80.702992 HUC-8 Code: 5030201 6/24/2014 Anticipated withdrawal start date: Drainage Area (sq. ml.): 4.01 County: Doddridge Anticipated withdrawal end date: 6/24/2015 Endangered Species? ✓ Mussel Stream? Total Volume from Source (gal): 7,170,000 ☐ Tier 3? Trout Stream? 1,000 Max. Pump rate (gpm): Regulated Stream? Proximate PSD? Max. Simultaneous Trucks: Gauged Stream? Max. Truck pump rate (gpm) 3114500 MIDDLE ISLAND CREEK AT LITTLE, WV Reference Gaug 458.00

	and a second	S. C. Company of the		Googe Titleshold (cis):	
Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)		
1	4.30	2.82	1.88		
2	5.41	2.82	2.98		
3	6.05	2.82	3.63		
4	4.49	2.82	2.07		
5	2.37	2.82	-0.05		
6	0.83	2.82	-1.60		
7	0.47	2.82	-1,96		
8	0.39	2.82	-2.04		
9	0.20	2.82	-2.23		
10	0.25	2.82	-2.18		
11	1.21	2.82	-1.21		
12	2.96	2.82	0.54		



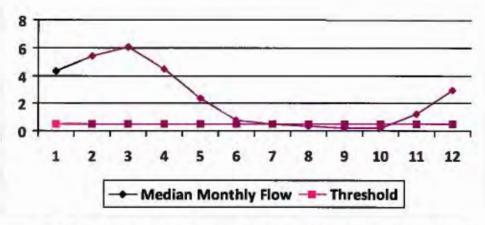

Water Availability Assessment of Location Base Threshold (cfs): 0.39

Gauge Threshold (cfs):

Upstream Demand (cfs): 0.00 Downstream Demand (cfs): 0.00 Pump rate (cfs): 2.23 Headwater Safety (cfs): 0.10 Ungauged Stream Safety (cfs): 0.10

Min. Gauge Reading (cfs): 69.73 Passby at Location (cfs): 0.59

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

Drainage Area (sq. mi.)

	WMP-0	01681	API/ID Number:	047-017-	06420	Operator:	Antero	Resources
			Но	ney Unit 1H				
Source I	D: 31255 Sou	irce Name Arn	old Creek @ Davis W	ithdrawal		Sou	rce Latitude: 39.	302006
		Jon	athon Davis			Source	e Longitude: -80	.824561
□ En	HUC-8 Code: Drainage Area dangered Species	-	.83 County: Stream?	Doddridge	Anti	cipated withdra	awal end date:	6/24/2014
□ Tr	out Stream?	☐ Tier 3?			10	tal Volume froi	m source (gai):	7,170,000
☐ Re	egulated Stream?					Max. Pur	mp rate (gpm):	1,000
☐ Pre	oximate PSD?						Max. Simultaneou	us Trucks: 0
☐ Ga	auged Stream?						Max. Truck pump ra	ate (gom) 0
	Drainage Area (sq	ı. mi.) 4	58.00			Gauge	Threshold (cfs):	45
Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)					
1	22,34	5.30	17.29					
2	28.10	5.30	23.05					
3	31.44	5.30	26.39					
4	23.35	5.30	18.30					
5	12.32	5.30	7.26					
6	4.30	5.30	-0.75					
7	2.43	5.30	-2.62					
8	2.00	5.30	-3.05					
9	1.03	5.30	-4.03					

Water Availability Profile

5.30


5.30

5.30

-3.76

1.25

10.34

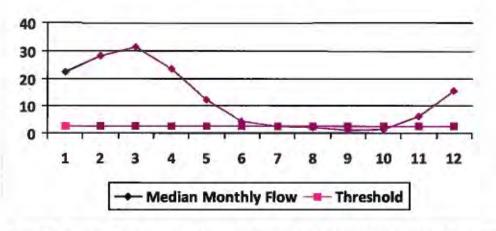

Min. Gauge Reading (cfs): Passby at Location (cfs):	69.73 3.07
Ungauged Stream Safety (cfs):	0.51
Headwater Safety (cfs):	0.51
Pump rate (cfs):	2.23
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	2.05

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

10

11

12


1.29

6.30

WMP-01681	API/ID Number:	047-017-06420 y Unit 1H	Operator: Antero	o Resources
Source ID: 31256 Source Name	Buckeye Creek @ Powell W Dennis Powell		Source Latitude: -	89.277142 80.690386
	×1	oddridge Anti	cipated withdrawal start date: cipated withdrawal end date: stal Volume from Source (gal): Max. Pump rate (gpm): Max. Simultane Max. Truck pump	6/24/2015 7,170,000 1,000 Bous Trucks: 0
Reference Gaug 31145 Drainage Area (sq. mi.)	MIDDLE ISLAND CR 458.00	EEK AT LITTLE, WV	Gauge Threshold (cfs):	45
Median Threshol Month (cfs) (+ pump	Available			

Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	33.41	6.82	26.95
2	42.02	6.82	35.56
3	47.02	6.82	40.56
4	34.92	6.82	28.46
5	18.42	6.82	11.96
6	6.43	6.82	-0.03
7	3.64	6.82	-2.82
8	3.00	6.82	-3.46
9	1.53	6.82	-4.92
10	1.93	6.82	-4.53
11	9.42	6.82	2.96
12	23.01	6.82	16.55
			75 5

Water Availability Profile

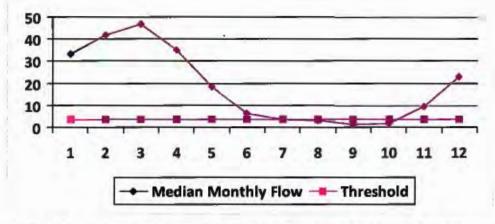

Water Availability Assessment of Location

Min. Gauge Reading (cfs): Passby at Location (cfs):	69.73 4.59
Ungauged Stream Safety (cfs):	0.77
Headwater Safety (cfs):	0.77
Pump rate (cfs):	2.23
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	3.06


"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

			3001	ice Detail			
	WMP-0	1681	API/ID Number:	047-017-06420 ney Unit 1H	Operator:	Antero Resources	
Source II	D: 31257 Sou	9.700	th Fork of Hughes Riv cy C. Knight & Stepha	The second secon	55° 28 -	e Latitude: 39.198369 Longitude: -80.870969	
☐ Tro	HUC-8 Code: Drainage Area (dangered Species? out Stream? gulated Stream? oximate PSD? auged Stream?	100	.26 County: Stream?	Ritchie		ral end date: 6/24/20	015
	Reference Gaug Drainage Area (sq	3155220 . mi.) 2	SOUTH FORK HU 29.00	GHES RIVER BELOW		reshold (cfs): 22	
Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)				
1	45.67	14.26	31.44				
2	59.55	14.26	45.31				
3	65.21	14.26	50.97				
4	36.87	14.26	22.63				
5	25.86	14.26	11.63				
6	13.90	14.26	-0.33				
7	6.89	14.26	-7.34				
8	3.98	14.26	-10.25				
9	4.79	14.26	-9.45				
10	5.20	14.26	9.04				
11	15.54	14.26	1.30				

Water Availability Profile

17.82

14.26

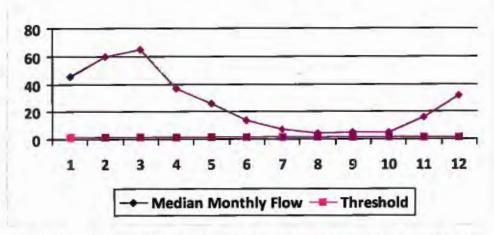

Water Availability Assessment of Location Base Threshold (cfs): 1.56 Upstream Demand (cfs): 5.62 0.00 Downstream Demand (cfs): 6.68 Pump rate (cfs): 0.39 Headwater Safety (cfs): 0.00 Ungauged Stream Safety (cfs): Min. Gauge Reading (cfs): 39.80 Passby at Location (cfs): 1.95

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.


32.06

12

	WMP-0	1681	API/ID Number:	047-017-06420	Operator:	Antero R	esources
			Hon	ey Unit 1H			
Source ID	: 31258 Sou	Part Part Part Part Part Part Part Part	North Fork of Hughes Rive ewis P. Davis and Norma	THE RESERVE OF THE PARTY OF THE	2000	Latitude: 39.3	
☐ Regi	HUC-8 Code: Drainage Area (langered Species? ut Stream? ulated Stream? ximate PSD? aged Stream?	-	15.18 County: sel Stream?	Ritchie		l end date: ource (gal):	W. Collection
	Reference Gaug	3155220	SOUTH FORK HUG	HES RIVER BELOW N	Total Control of the Control		Mar
D	Orainage Area (sq	. mi.)	229.00		Gauge Thre	eshold (cfs):	22
Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)				
2	42.64 55.59 60.88	4.42 4.42 4.42	38.36 51.32 56.60				

42.64	4.42	38.36
55.59	4.42	51.32
60.88	4.42	56.60
34.42	4.42	30.14
24.15	4.42	19.87
12.98	4.42	8.70
6.44	4.42	2.16
3.72	4.42	-0.56
4.47	4.42	0.19
4.85	4.42	0.57
14.50	4.42	10.23
29.93	4.42	25.65
	55.59 60.88 34.42 24.15 12.98 6.44 3.72 4.47 4.85 14.50	55.59 4.42 60.88 4.42 34.42 4.42 24.15 4.42 12.98 4.42 6.44 4.42 3.72 4.42 4.47 4.42 4.85 4.42 14.50 4.42

Water Availability Profile

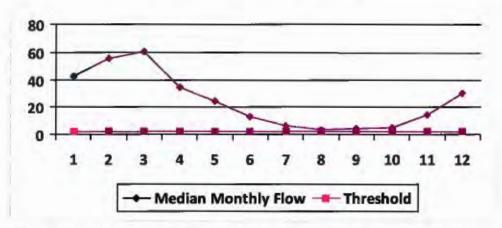

Water Availability Assessment of Location Base Threshold (cfs): 1.46

Upstream Demand (cfs): 0.00

Downstream Demand (cfs): 0.00

Pump rate (cfs): 2.23
Headwater Safety (cfs): 0.36

Ungauged Stream Safety (cfs):

Min. Gauge Reading (cfs): 35.23

Passby at Location (cfs): 2.19

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

west virginia department of environmental protection



Water Management Plan: Secondary Water Sources



WMP-01681

API/ID Number

047-017-06420

Operator:

Antero Resources

Honey Unit 1H

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Lake/Reservior

Source ID: 31263 Source Name

City of Salem Reservior (Lower Dog Run)

Public Water Provider

Source start date:

6/24/2014

Source end date:

6/24/2015

Source Lat:

39.28834

Source Long:

-80.54966 County Harrison

Max. Daily Purchase (gal)

1,000,000

Total Volume from Source (gal):

7,170,000

WMP-01681

API/ID Number

047-017-06420

Operator:

Antero Resources

Honey Unit 1H

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 31264 Source Name

Pennsboro Lake

Source start date:

6/24/2014

Source end date:

6/24/2015

Source Lat:

39.281689

Source Long:

-80.925526

County

Ritchie

Max. Daily Purchase (gal)

Total Volume from Source (gal):

7,170,000

DEP Comments:

Source ID: 31265 Source Name

Powers Lake (Wilderness Water Park Dam)

Source start date: Source end date:

6/24/2014 6/24/2015

Source Lat:

39.255752

Private Owner

-80.463262 Source Long:

County

Harrison

Max. Daily Purchase (gal)

Total Volume from Source (gal):

7,170,000

WMP-01681

API/ID Number

047-017-06420

Operator:

Antero Resources

Honey Unit 1H

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 31266 Source Name

Powers Lake Two

Source start date:

6/24/2014

Source end date:

6/24/2015

Source Lat:

39.247604

Source Long:

-80.466642

County

Harrison

Max. Daily Purchase (gal)

Total Volume from Source (gal):

7,170,000

Honey Unit 1H

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Other

Source ID: 31267 Source Name

Poth Lake (Landowner Pond)

Private Owner

Source start date:

6/24/2014

Source end date:

6/24/2015

Source Lat:

39.221306

Source Long:

-80.463028

County

Harrison

Max. Daily Purchase (gal)

Total Volume from Source (gal):

7,170,000

DEP Comments:

Source ID: 31268 Source Name

Williamson Pond (Landowner Pond)

Source start date:

6/24/2014

Source end date:

6/24/2015

Source Lat:

39.19924

Source Long:

-80.886161

County

Ritchie

Max. Daily Purchase (gal)

Total Volume from Source (gal):

7,170,000

Honey Unit 1H

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- *For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- *For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Eddy Pond (Landowner Pond) Source ID: 31269 Source Name

Source start date:

6/24/2014

Source end date:

6/24/2015

Source Lat:

39.19924

Source Long:

-80.886161

County

Ritchie

Max. Daily Purchase (gal)

Total Volume from Source (gal):

7,170,000

DEP Comments:

Source ID: 31270 Source Name

Hog Lick Quarry

Industrial Facility

Source start date:

Source end date:

6/24/2014 6/24/2015

Source Lat:

39.419272

Source Long:

-80.217941

County

Marion

Max. Daily Purchase (gal)

1.000.000

Total Volume from Source (gal):

7,170,000

Honey Unit 1H

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: |31271 | Source Name

Glade Fork Mine

Industrial Facility

Source start date:

6/24/2014

Source end date:

6/24/2015

Source Lat:

38.965767

Source Long:

-80.299313

County

Upshur

Max. Daily Purchase (gal)

1,000,000

Total Volume from Source (gal):

7,170,000

DEP Comments:

Recycled Frac Water

Source ID: 31272 Source Name

Various

Source start date:

6/24/2014

Source end date:

6/24/2015

Source Lat:

Max. Daily Purchase (gal)

Source Long:


County

Total Volume from Source (gal):

7,170,000

DEP Comments:

Sources include, but are not limited to: Honey Unit 2H

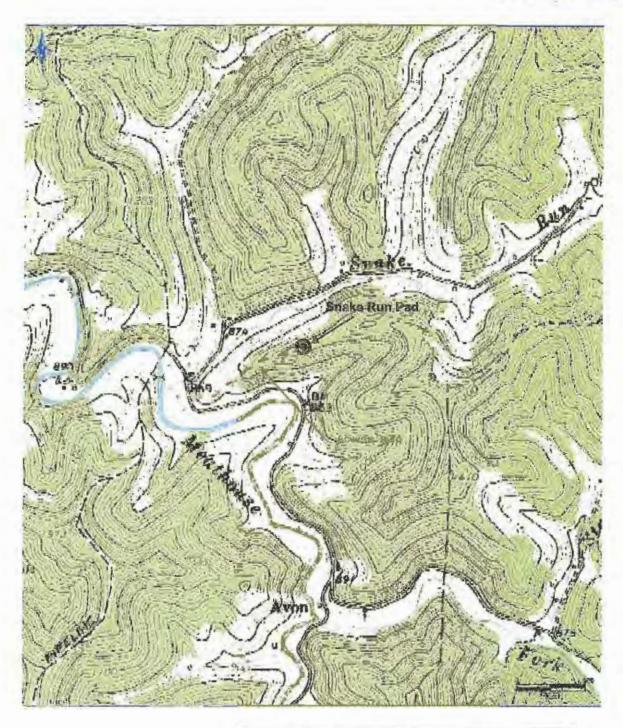

Antero Resources Corporation

Appalachian Basin Honey Unit 1H Doddridge County

Quadrangle: New Milton Watershed: Meathouse Fork

District: New Milton Date: 11-1-2013 Ceived

Office of Oil and Cease Protection

Office of Oil and Cease Protection

Office of Oil and Cease Protection

