

west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax Earl Ray Tomblin, Governor Randy C. Huffman, Cabinet Secretary www.dep.wv.gov

March 19, 2014

WELL WORK PERMIT

Horizontal 6A Well

This permit, API Well Number: 47-1706470, issued to ANTERO RESOURCES CORPORATION, is evidence of permission granted to perform the specified well work at the location described on the attached pages and located on the attached plat, subject to the provisions of Chapter 22 of the West Virginia Code of 1931, as amended, and all rules and regulations promulgated thereunder, and to all conditions and provisions outlined in the pages attached hereto. Notification shall be given by the operator to the Oil and Gas Inspector at least 24 hours prior to the construction of roads, locations, and/or pits for any permitted work. In addition, the well operator shall notify the same inspector 24 hours before any actual well work is commenced and prior to running and cementing casing. Spills or emergency discharges must be promptly reported by the operator to 1-800-642-3074 and to the Oil and Gas inspector.

Please be advised that form WR-35, Well Operators Report of Well Work is to be submitted to this office within 90 days completion of permitted well work, as should form WR-34 Discharge Monitoring Report within 30 days of discharge of pits, if applicable. Failure to abide by all statutory and regulatory provisions governing all duties and operations hereunder may result in suspension or revocation of this permit and, in addition, may result in civil and/or criminal penalties being imposed upon the operators.

In addition to the applicable requirements of this permit, and the statutes and rules governing oil and gas activity in WV, this permit may contain specific conditions which must be followed. Permit conditions are attached to this cover letter.

Per 35CSR-4-5.2.g this permit will expire in two (2) years from the issue date unless permitted well work is commenced. If there are any questions, please feel free to contact me at (304) 926-0499 ext. 1654.

James Martin

Operator's Well No: LIFE UNIT 1H

Farm Name: TRENT, CLARENCE, JR., . ET AL

API Well Number: 47-1706470

Permit Type: Horizontal 6A Well

Date Issued: 03/19/2014

PERMIT CONDITIONS

West Virginia Code § 22-6A-8(d) allows the Office of Oil and Gas to place specific conditions upon this permit. Permit conditions have the same effect as law. <u>Failure to adhere to the specified permit conditions may result in enforcement action.</u>

CONDITIONS

- 1. This proposed activity may require permit coverage from the United States Army Corps of Engineers (USACOE). Through this permit, you are hereby being advised to consult with USACOE regarding this proposed activity.
- 2. If the operator encounters an unanticipated void, or an anticipated void at an unanticipated depth, the operator shall notify the inspector within 24 hours. Modifications to the casing program may be necessary to comply with W. Va. Code § 22-6A-5a (12), which requires drilling to a minimum depth of thirty feet below the bottom of the void, and installing a minimum of twenty (20) feet of casing. Under no circumstance should the operator drill more than fifty (50) feet below the bottom of the void or install less than twenty (20) feet of casing below the bottom of the void.
- 3. When compacting fills, each lift before compaction shall not be more than 12 inches in height, and the fill material shall be within plus or minus 2% of the optimum moisture content as determined by the standard proctor density test, ASTM D698, Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort. Each lift must meet 95 % compaction of the optimum density based on results from the standard proctor density test of the actual soils used in specific engineered fill sites. Each lift shall be tested for compaction, with a minimum of two tests per lift per acre of fill. All test results shall be maintained on site and available for review.
- 4. Operator shall install signage per § 22-6A-8g (6) (B) at all source water locations included in their approved water management plan within 24 hours of water management plan activation.
- 5. Oil and gas water supply wells will be registered with the Office of Oil and Gas and all such wells will be constructed and plugged in accordance with the standards of the Bureau for Public Health set forth in its Legislative rule entitled Water Well Regulations, 64 C.S.R. 19. Operator is to contact the Bureau of Public Health regarding permit requirements. In lieu of plugging, the operator may transfer the well to the surface owner upon agreement of the parties. All drinking water wells within fifteen hundred feet of the water supply well shall be flow tested by the operator upon request of the drinking well owner prior to operating the water supply well.
- 6. Pursuant to the requirements pertaining to the sampling of domestic water supply wells/springs the operator shall, no later than thirty (30) days after receipt of analytical data provide a written copy to the Chief and any of the users who may have requested such analyses.
- 7. If any explosion or other accident causing loss of life or serious personal injury occurs in or about a well or well work on a well, the well operator or its contractor shall give notice, stating the particulars of the explosion or accident, to the oil and gas inspector and the Chief, within 24 hours of said accident.
- 8. During the casing and cementing process, in the event cement does not return to the surface, the oil and gas inspector shall be notified within 24 hours.

WW-6B (9/13)

4701706470

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS WELL WORK PERMIT APPLICATION

1) Well Opera	tor: Antero R	Resources Cor	rporation	494488557	017- Doddridge	Greenbrier	New Milton 7.5'
				Operator ID	County	District	Quadrangle
2) Operator's	Well Number:	Life Unit 1H		Well Pa	d Name: Trent	Pad (existing	ng)
3) Farm Name	/Surface Own	er: Clarence	Trent, Jr	et al Public Ro	ad Access: Stan	ding Stone	Road CR 46
4) Elevation, c	urrent ground	l: 1410'	Ele	evation, proposed	post-construction	on: 1410'	
5) Well Type	(a) Gas		Oil _	Und	lerground Storag	e	
	Other						
	(b)If Gas	Shallow		Deep			261
a de la como		Horizontal					2-20
6) Existing Pa							
Contract of the Contract of th	Particular services and an experience			pated Thickness 60', Associated Pre		Pressure(s):	
8) Proposed To	otal Vertical I	Depth: 7700	'TVD				
9) Formation a	t Total Vertic	al Depth: M	Aarcellus S	Shale			
10) Proposed 7	Total Measure	d Depth: 1	8,800' MD				
11) Proposed I	Horizontal Leg	g Length: 1	0,606'				
12) Approxima	ate Fresh Wat	er Strata Dep	ths:	135'			
13) Method to	Determine Fr	esh Water De	epths: B	lowen Unit 2H (47-0	017-06167) on san	ne pad.	
14) Approxima	ate Saltwater I	Depths: 21	26'				
15) Approxima	ate Coal Seam	Depths: 70	18'				
16) Approxima	ate Depth to P	ossible Void	(coal min	ne, karst, other):	None anticipated		
17) Does Prope directly overly	ing or adjacen	nt to an active		Yes	No	7	
(a) If Yes, pro	ovide Mine In Of Oil and Cot Oil 2014	fo: Name:					
75	SEINEP C	all Depth:					
DE	Of Oll SI	Seam:					
Office	FEB 21 2014	Owner:					
	V Departm	ent of ction					
181	V Departal	Protect					
74	ronmeria						
FILM	73						Page 1 of 3

18)

CASING AND TUBING PROGRAM

TYPE	Size	New or Used	Grade	Weight per ft. (lb/ft)	FOOTAGE: For Drilling	INTERVALS: Left in Well	CEMENT: Fill-up (Cu. Ft.)
Conductor	20"	New	H-40	94#	40'	40'	CTS, 38 Cu. Ft.
Fresh Water	13-3/8*	New	J-55/H-40	54.5#/ 48#	305'	305'	CTS, 424 Cu. Ft
Coal	9-5/8"	New	J-55	36#	2470'	2470'	CTS, 1006 Cu. Ft.
Intermediate							
Production	5-1/2"	New	P-110	20#	18800'	18800'	4771 Cu. Ft.
Tubing	2-3/8"	New	N-80	4.7#		7100'	
Liners							

7.20.2014

TYPE	Size	Wellbore	Wall	Burst Pressure	Cement Type	Cement Yield
		<u>Diameter</u>	<u>Thickness</u>	ŀ		(cu. ft./k)
Conductor	20"	24"	0.438"	1530	Class A	1.18
Fresh Water	13-3/8"	17-1/2"	0.38"/0.33"	2730/1730	Class A	1.18
Coal	9-5/8"	12-1/4"	0.352"	3520	Class A	1.18
Intermediate						
Production	5-1/2"	8-3/4" & 8-1/2"	0.361"	12630	Lead-H/POZ & Tail - H	H/POZ-1.44 & H-1.8
Tubing	2-3/8"	4.778"	0.19"	11200		
Liners						

PACKERS

Kind:	N/A		
Sizes:	N/A		
Depths Set:	N/A		

Received

FEB 2 1 2014

Page 2 of 3

Office of Oil and Gas
WV Dept. of Environmental Protection

WW-6B (9/13)

19) Describe proposed well work, including the drilling and plugging back of any pilot hole:
Drill, perforate, fracture a new horizontal shallow well and complete Marcellus Shale.
20) Describe fracturing/stimulating methods in detail, including anticipated max pressure and max rate:
Antero plans to pump Slickwater into the Marcellus Shale formation in order to ready the well for production. The fluid will be comprised of approximately 99 percent water and sand, with less than 1 percent special-purpose additives as shown in the attached "List of Anticipated Additives Used for Fracturing or Stimulating Well."
21) Total Area to be disturbed, including roads, stockpile area, pits, etc., (acres): 12.37 acres (existing)
22) Area to be disturbed for well pad only, less access road (acres): 6.403 acres (existing)
23) Describe centralizer placement for each casing string:
Conductor: no centralizers Surface Casing: one centralizer 10' above the float shoe, one on the insert float collar and one every 4th joint spaced up the hole
to surface. Intermediate Casing: one centralizer above float joint, one centralizer 5' above float collar and one every 4th collar to surface. Production Casing: one centralizer at shoe joint and one every 3 joints to top of cement in intermediate casing.
24) Describe all cement additives associated with each cement type:
Conductor: no additives, Class A cement. Surface: Class A cement with 2-3% calcium chloride
intermediate: Class A cement with 1/4 lb of flake, 5 gallons of clay treat
Production: Lead cement- 50/50 Class H/Poz + 1.5% salt + 1% C-45 + 0.5% C-16a + 0.2% C-12 + 0.45% C-20 + 0.05% C-51 Production: Tall cement- Class H + 45 PPS Calcium Carbonate + 1.0% FL-160 + 0.2% ACGB-47 + 0.05% ACSA-51 + 0.2% ACR-20
OS) Proceed beneficial and delication and delicatio
25) Proposed borehole conditioning procedures: Conductor: blowhole clean with air, run casing, 10 bbis fresh water.
Surface: blowhole clean with air, trip to conductor shoe, trip to bottom, blowhole clean with air, trip out, run casing, circulate pipe capacity + 40 bbis fresh water followed by 25 bbis bentonite mud, 10 bbis fresh water spacer.
Intermediate: blowhole clean with air, trip to surface casing shoe, trip to bottom, blowhole clean with air, trip out, run casing, circulate 40 bbis brine
water followed by 10 bbls fresh water and 25 bbls bentonite mud, pump 10 bbls fresh water. Production: circulate with 14 lb/gal NaCl mud, trip to middle of lateral, circulate, pump high viscosity sweep, trip to base of curve, pump high viscosity
sweep, trip to top of curve, trip to bottom, circulate, pump high viscosity sweep, trip out, run casing, circulate 10 bbis fresh water, pump 48 bbis barite pill, pump 10 bbis fresh water followed by 48 bbis mud flush and 10 bbis water.
*Note: Attach additional sheets as needed.
*Note: Attach additional sheets as needed.

Office of Oil and Gas
WV Dept. of Environmental Protection

FEB 2 1 2014

Page 3 of 3

API Number 47 -	017	
Operator's	Well No	Life Unit 1H

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION OFFICE OF OIL AND GAS

FLUIDS/ CUTTINGS DISPOSAL & RECLAMATION PLAN

\$ 100 m		37.7	
Operator Name Antero Res	ources Corporation	OP Code 494488557	
Watershed (HUC 10) Stand	lingstone Run of Meathouse Fork Q	uadrangle New Milton 7.5'	
Elevation 1410	County_Doddridge	District_Greenbrier	
Will a pit be used? Yes		ed frac pit will be used for flowback fluid	
	e anticipated pit waste: Drilling and Flo		- 000 10
	er be used in the pit? Yes No _	If so, what ml.? 60 mit.	- V 20
2000 - 2000 - 2000	Method For Treated Pit Wastes:		2"
	and Application	o.	
	nderground Injection (UIC Permit Numb	er ations when applicable. API# will be provided on Form WR-	34
_ O		disposal location) (Meadowfill Landfill Permit	
Will closed loop system be u	sed? If so, describe: Yes		
Drilling medium anticipated	for this well (vertical and horizontal)? Ai-	r, freshwater, oil based, etc. Dut/5597 Fuem, Production - Wi	edate - Her Besed Mud
	ype? Synthetic, petroleum, etc. N/A	*	
	ng medium? Please See Attachment		
	AND A SHARE OF THE PARTY OF THE	Stored in tanks, removed offelte and taken to be	andfill
		etc. Stored in tanks, removed offsite and taken to b	37010.
	n to solidify what medium will be used?		
-Landfill or offsite n	ame/permit number? Meadowfill Landfill (Per	mit #SWF-1032-98)	
on August 1, 2005, by the Of provisions of the permit are law or regulation can lead to I certify under pena application form and all att obtaining the information, I	fice of Oil and Gas of the West Virginia I enforceable by law. Violations of any te enforcement action. alty of law that I have personally examinachments thereto and that, based on m	ns of the GENERAL WATER POLLUTION Department of Environmental Protection. I use a condition of the general permit and/or ned and am familiar with the information by inquiry of those individuals immediately curate, and complete. I am aware that the fine or imprisonment.	anderstand that the or other applicable submitted on this presponsible for
Company Official Signature	1) muly offing		FEB 2 1 2014
Company Official (Typed Na	Donald Gray		
Company Official Title En	vironmental Manager	WV De	Office of Oil and Gas opt. of Environmental Protection
Subscribed and sworn before	me this 6 day of Feb	, 20 PISA BOTTINE Notary Publi Notary Publidete of Colors Notary ID 201240 My Commission Expires	c ado 172365

Form WW-9

Operators well No	Operator's Well No. Life Unit 1H
-------------------	----------------------------------

Antero Resource	es Corporation		
Proposed Revegetation Tre	eatment: Acres Disturbed 12.37	Prevegetation pl	н
Lime 2-3	Tons/acre or to correct to pl	6.5	-
	y or straw or Wood Fiber (will be used		
Fertilizer amount	500	bs/acre	
Mulch_2-3	Tons		
		rac Pit (2.528) + Existing Stockpiles (.895) = 12.37	Existing Acres
	· <u>Sec</u>	ed Mixtures	
1	Temporary	Perma	ment
Seed Type	lbs/acre	Seed Type	lbs/acre
Oats	168	Tall Fescue	50
Rye	120		
*or type of grass seed r	equested by surface owner	*or type of grass seed reque	ested by surface owner
	olved 7.5' topographic sheet.	- Tall Ers any d	listorbed
areas			
Fitle: DD r L	Dos inspector	Date: <u>2 - 20 <i>- 26</i></u>) No	<i>I4</i> Rec
field Reviewed? (Yes () No	nec

FEB 2 1 2014



Well Site Safety Plan Antero Resources

Well Name: Cox Unit 1H, Cox Unit 2H, Bowen Unit 1H,

Bowen Unit 2H, and Standings Unit 1H

Pad Location: TRENT PAD

Doddridge County/Greenbrier and New

Milton Districts

GPS Coordinates: Lat 39°12'33.52"/Long 80°37'45.16"

Driving Directions:

From the intersection of interstate 50 and WV 18 S, head south along the 18 for 6.3 miles. Turn left onto Co Route 25/Meathouse Fork for 7.3 miles. Take a left onto Co Route 25/11 for 1.75 miles. Take a left onto Co Route 25/7 for 0.65 miles. Lease road will be on the left.

DCN. 3/14/13


3/14/13

Received

SSP Page 1

FEB 2 1 2014

4701706470 Plat gottlal

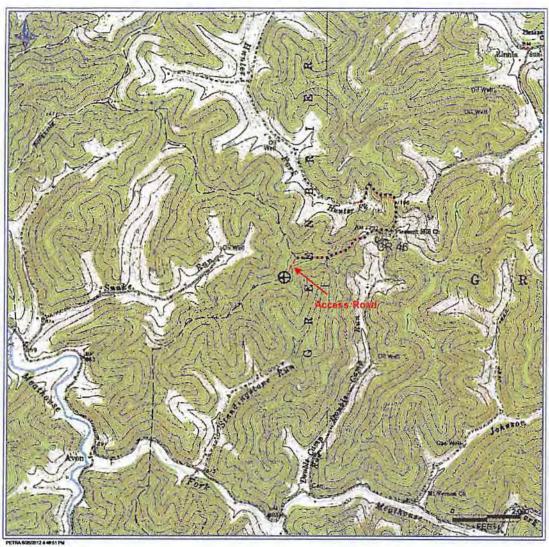

DC 1 2014

Received

FEB 2 1 2014

Antero Resources Corporation


APPALACHIAN BASIN

Life Unit 1H
County Doddridge


2,000 4,000
FEET

QUADRANGLE: NEW MILTON & BIG ISAAC WATERSHED: STANDINGS RUN DISTRICT: GREENBRIER DISTRICT: GREENBRIER
DISTRICT: Date: 9/12/2012

Office of Oil and Gas
WV Dept. of Environmental Protection

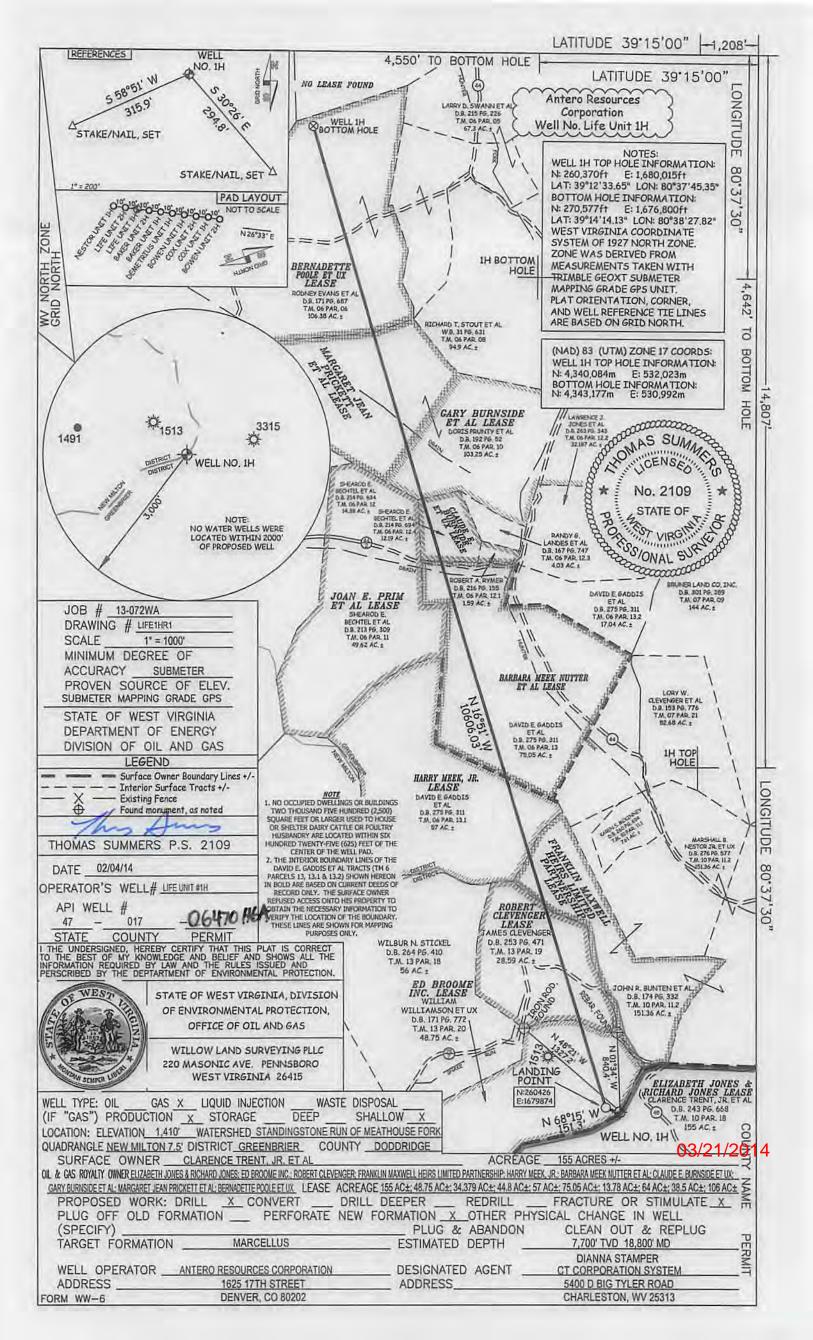

PROJECT LOCATION-



ANTERO RESOURCES

TRENT SITE DESIGN & **CONSTRUCTION AND EROSION &** SEDIMENT CONTROL PLANS

GREENBRIER AND NEW MILTON DISTRICTS PPROVED DODDRIDGE COUNTY, WEST VIRGINIA

OCTOBER 4, 2012

N: 260360.8993 E: 1648536.7191 LAT: N 39.20931°, 39°12'33.52" LONG: W 80.62921°, 80°37'45.16" NAD 83, UTM ZONE 17, METER N: 260897.5404 E: 1649039,2152 LAT: N 39.21080°, 39°12'38.88" LONG: W 80.62746°, 80°37'38.86" NAD 83, UTM ZONE 17, METER N: 4340235.771 E: 532162.710

PROJECT LOCATION PROJECT LOCATION-WEST VIRGINIA API#1706160 API#1706161 API#1706167

DATE DESCRIPTION BY REMOVED DISTURBANCE OFF 10/4/1 RJH -19.21 EVISED ENV. DELINEATION PER G.A.L. ENS 1/26/1 ADDED SLIMP DETAIL 01/16/1 2,7,12-27 EWS

BOWEN UNIT 2H 260343.4598 1648542 5381 N 39.20926"

CENTER OF BOREHOLE COORDINATES (NADIS), WY STATE PLANES, NORTH, FOOT)

1648582,7632

260423.9703

260415.0246

240188 1828

260370.2966

260361.3510

APPROVED FOR PERMITS APPROVED FOR CONSTRUCTION DATE: 1/11/13 BY: RM

LIFE LINIT 26

DEFLINIT 3H

BAKER LINIT 2H BAKER LINIT 1H

N 39 20948" W 80 62905"

M 39-20646*

M 39 20935*

1645551 4770 N 39 70931* W 80 62506*

260352.4054 1648547.0075 N 39.20829" W 80.62918"

CIVIL . ENVIRONMENTAL . CONSULTING . FIELD SERVICES 30 COLUMBIA BOULEVARD - CLARKSBURG, WV 26301

WELL PAD CENTER
ACCESS ROAD BEGINNING
NAD 83, WY STATE PLANES, NORTH, FOOT
NAD 83, WY STATE PLANES, NORTH, FOOT N: 4340069,733 E: 532012.349

FEMA FLOOD MAP

PANEL: 235 OF 325

DODDRIDGE COUNTY, WV