

STATE OF WEST VIRGINIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION
OFFICE OF OIL AND GAS

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE IN TRIPLICATE, one copy mailed to the Department, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

Farm name: Mary H. Walker, et al Operator Well No.: JS Walker 4

LOCATION: Elevation: 1,468' Quadrangle: Blacksville
District: Clay County: Monongalia
UTM GPS Northing: 4389370.0
UTM GPS Easting: 572565.0

Well Type: OIL _____ GAS X

Company	<u>NNE Resources LLC</u>	Coal Operator	<u>Murray Energy Corporation</u>
	<u>707 Virginia St. E, Suite 1200</u>	or Owner	<u>46226 National Road</u>
	<u>Charleston, WV 25301</u>		<u>St. Clairsville, OH 43950</u>
Agent	<u>Hollie Medley, Regulatory Manager</u>	Coal Operator	<u>Concorde Corporation</u>
Permit Issued Date	<u>11/9/2020</u>	or Owner	<u>3748 Dents Run Blvd, Ste A</u>
			<u>Morgantown, WV 26501</u>

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of Monongalia ss:

Michael Lewis and Dustin Crislip being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by the above named well operator, and participated in the work of plugging and filling the above well say that said work was commenced on the 26th day of May, 2021, and the well was plugged and filled in the following manner:

TYPE	FROM	TO	PIPE REMOVED	LEFT
100 Sks Class A Cmt.	2198'	1796'	2160' of 2" Tubing	0
6% Gel	1796'	1240'	1892' of 5.5" Casing	228' of 5.5" Casing
106 Sks Class A Cmt.	1240'	700'	20' of 7" Casing	1840' of 7" Casing
6 % Gel	700'	200'		806' of 8.25" Casing
164 Sks Class A Cmt.	200'	0'		
			Perforate 7" and 8.25" Casings w/	4 SPF every 100' from 1200' - 100'

Description of monument: 2 x 2 Steel Plate W/ Well Info. Attached to 7" Casing Extending 30" Above GL. and that the work of plugging and filling said well was completed on the 17th day of June, 2021.

And further deponents saith not.


Sworn and subscribe before me this 26 day of July, 2021

My commission expires 3/17/2025

Myrinda A. Summerlin
Notary Public

Affidavit reviewed by Office of Oil and Gas: Bryan Hair

Title: Inspector

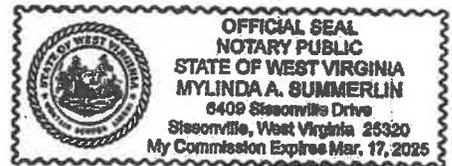

RECEIVED
Office of Oil and Gas

AUG 16 2021

WV Department of Environmental Protection

08/20/2021