

**STATE OF WEST VIRGINIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION
OFFICE OF OIL & GAS**

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE IN TRIPLICATE, one copy mailed to the Department, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

Farm Name: James E. Eddy Operator Well No.: No. 5
 Location: Elevation: 1273' Quadrangle: Blacksville 7.5"
 District: Clay County: Monongalia
 Latitude: _____ Feet South of: _____ Deg. _____ Min. _____ Sec. _____
 Longitude: _____ Feet West of: _____ Deg. _____ Min. _____ Sec. _____

Well Type: Oil Gas _____ WIW _____

Company: East Resources Inc. Coal Operator CONSOL Energy - Michele O'Neil
5260 Dupont Road or Owner RD 4, Box 425
Parkersburg, WV 26101 Moundsville, WV 26041

Agent: Phillip S. Ondrusek Coal Operator NA
 or Owner _____

Permit Issued: 6/27/12

AFFIDAVIT

State of West Virginia, County of Wood ss:

Phil Ondrusek and Ken Dotson being first duly sworn according to law, depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by the above operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 12th day of August, 20 12 and the well was plugged and filled in the following manner:

TYPE	FROM	TO	PIPE REMOVED	LEFT
Cement	2090'	1870' (Tag)	6 5/8" 360'	1402'
Cement	1750'	1495' (Tag)	4 7/8" 601'	1155'
Cement	760'	300' (Tag)		
Cement	100'	0'		
Perforated 4 7/8" & 6 5/8" casing, 1 Shot/20' from 1750' - 1650', 1 Shot/10' from 750' - 650' & 1 Shot/1' from 720' - 710'.				
6% Gel Between Cement Plugs				

Description of monument: 7" x 5' and that the work of plugging and filling said well was completed on the 31st day of August, 20 12

And further deponents saith not.

Phillip S. Ondrusek
Ken Dotson

Sworn and subscribed before me this 16th day of April
My commission expires: Nov. 12, 2015

Notary Public Tina L. Pethtel


Affidavit reviewed by the
Office of Oil and Gas: _____

Title: _____

RECEIVED
Office of Oil and Gas

DEC 12 2014
2013

WV Department of
Environmental Protection

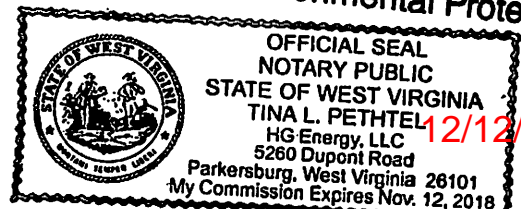

12/12/2014