

STATE OF WEST VIRGINIA
DIVISION OF ENVIRONMENTAL PROTECTION
OFFICE OF OIL AND GAS

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

Farm name: Enail Woodruff Operator Well No.: F2-468

LOCATION: Elevation: 1180 Quadrangle: Wadestown
District: Bethelle County: Monongalia
Latitude: 2700' Feet South of 39 Deg. 40 Min. 00 Sec.
Longitude: 6550' Feet West of 80 Deg. 17 Min. 30 Sec.

Well Type: OIL X GAS _____

Company: Eastern Associated Coal Coal Operator Eastern Associated Coal
1044 Miracle Run Road or Owner 1044 Miracle Run Road
Fairview W.Va. 26570 Fairview W.Va. 26570


Agent: Terry O. Hendershot

Coal Operator or Owner

Permit Issued Date: Feb. 15, 2000

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of Monongalia ss:



Melvin Eddy and Mickey Hayhurst being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by the above named well operator, and participated in the work of plugging and filling the above well, and Randall Mick Oil and Gas Inspector representing the Director, say that said work was commenced on the 7 day of March, 2000, and that the well was plugged and filled in the following manner:

TYPE	FROM	TO	PIPE REMOVED	LEFT
Cleaned out to	1650			
Logged well	Gamma Ray Neutron and 3 Arm Caliper			
Run 2 3/8 tubing to	1650	Run 125 SKs Cement + Pulled tubing		
Run 4 1/2" pipe to	1080	Run 460 SKs Portland and 160 SKs Chem Comp.		
Pumped Latch down plug to	1040			
Bailed water out inside	4 1/2" end	checked plug OK		
Pittsburgh Coal	952-960			

Description of monument: 4 1/2" pipe Metal Plate A.P.I. and Date Plugged and that the work of plugging and filling said well was completed on the 7 day of March, 2000.

And further deponents saith not.

Melvin Eddy

Mickey Hayhurst


Sworn and subscribe before me this 24th day of March, 2000

My commission expires: January 13, 2003

Allen K Moore

Notary Public

Oil and Gas Inspector: Randall Mick

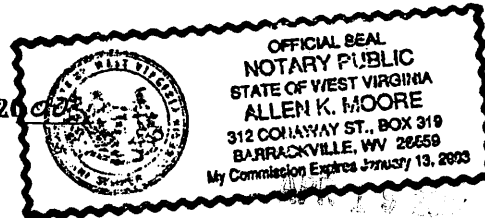

MOND 1384-P