

STATE OF WEST VIRGINIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION
OFFICE OF OIL AND GAS

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE IN TRIPLICATE, one copy mailed to the Department, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

Farm name: Betty Martino Operator Well No.: F2-484

LOCATION: Elevation: 1,118 Quadrangle: Wadestown
District: Battelle County: Monongalia
Latitude: 7,150 Feet South of 39 Deg. 40 Min. 00 Sec.
Longitude: 5,350 Feet West of 80 Deg. 17 Min. 30 Sec.

Well Type: OIL X GAS _____


Company: Eastern Associated Coal Corp Coal Operator: Eastern Associated Coal Corp
1044 Miracle Run Road or Owner 1044 Miracle Run Road
Fairview, WV 26570 Fairview, WV 26570

Agent: Edward Y. Hoy

Coal Operator: _____
or Owner _____

Permit Issued Date: _____

AFFIDAVIT



STATE OF WEST VIRGINIA,
County of Monongalia ss:

MICHAEL HAYHURST and MELVIN R. EDDY being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by the above named well operator, and participated in the work of plugging and filling the above well, and Randall Mick Oil and Gas Inspector representing the Director, say that said work was commenced on the 5th day of October, 2001, and that the well was plugged and filled in the following manner:

TYPE	FROM	TO	PIPE REMOVED	LEFT
	Cleaned out to 1,205 ft.			
	Pumped 30 sacks of cement through drill steels for bottom plug.			
	Logged well—Directional Survey, Gamma Ray and CCL.			
	Ran 965 ft of 4½" pipe with latch down plug.			
	Pumped 720 sacks through 4 ½" to surface.			
	Bailed water out inside of 4½" pipe and checked plug—OK.			
	Pittsburgh Coal 881-888.			


Description of monument: 4½" Pipe with metal plate, API#, Date plugged and that the work of plugging and filling said well was completed on the 7th day of October, 2001.

And further deponents saith not. Michael Hayhurst
Melvin R. Eddy

Sworn and subscribe before me this 8th day of OCTOBER 20 01.
My commission expires: July 7, 2007

[Signature]
Notary Public

Oil and Gas Inspector: [Signature]

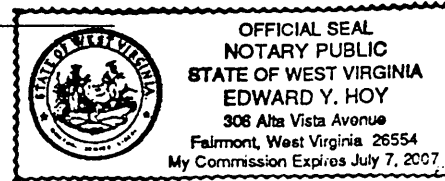

MONO 1419-P