Latitude 38° 55'00"

1,740

Longitude

Topo Location

7.5' Loc.______ 15' Loc._____ (calc.)

Company Carnegie Nat. Gas Co.


Farm A.B. Hinzman # 1326

7.5' Quad Glenuille

District Center

WELL LOCATION PLAT

County 021 Permit 30081

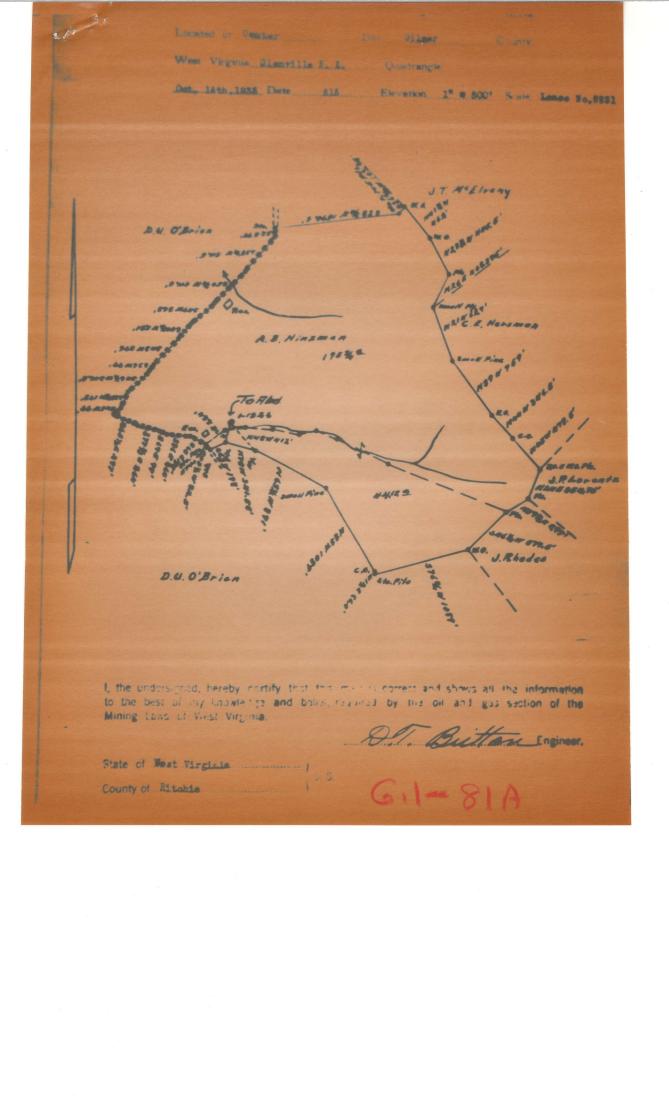

Center District, Gilmer County, W. Va. 8/-A Carnegie Natural Gas Co., 962 Frick Bldg. Annex, Pittsburgh, Pa. On 240 acres, surface and mineral rights owned by A. B. Hinzman Heirs, Glenville, W. Va. Drilled before June, 1929.

Elevation, 815' B.

8\frac{1}{4}" casing, 750'; 6-5/8", 1540'; 2" tubing, 1578'.

Hook wall packer, 8\frac{1}{4} x 6-5/8, set at 1540'. No coal was encountered.
Abandonment reported to Dept. of Mines Oct. 25, 1935. Well was shot at 1560-1566; and 1557-1566;. Fresh water at 450;

	Top. Bottom.
Little Dunkard Sand	280 - 305
Big Dunkard Sand (water, 4501)	420 - 480
Gas Sand	638 - 700
1st Salt Sand	800 - 875
2nd Salt Sand	1075 - 1160
Maxton Sand	1440 - 1510
Little Lime	1530 - 1552
Pencil Cave	1552 - 1560
Blue Monday Sand (oil and gas at	
1560-1566')	1560 - 1570
Big Injun Sand (show gas, 17001)	1640 - 1730
Squaw Sand	1835 - 1910
Total depth	2563
Well plugged back to	1578

POR PRICE MULL	IN ANTEL 10						
PITTSREE, PA							
Name Color	Character	Oil, GRe at. Water					
			2.90		2.5		
Mettle Dumbard		Water - 450.	420	480			
Big Dunkard		Nath - 100	638	700	62		
Gas Sand			800	875	75		
1st Salt Sand			1075	1160	85		
2md Salt Sand			1440	1510	70		
Maxton Sand			1530	1552	22		
Little Lime			1552	1560	8		1000 - 1 A
Pencil Cave		Oil & Gas	1560	1570	10	1535	2 +4
Blue Monday		1560 - 66.		1730	90	131	
Big Injun		Show Gas - 1700.	1640	1910	75		
Squaw		ELL PLUGGED BAC	1835			2563 1578	
well was shot				as shot at		1500	feet.

PRELIMINARY DATA SHELT NO 1

PARNEGIS NATURAL GAS Company of 902 FRICK RUILDING ANNEX

PITTSBERGE, PA. on this

A. S. HINZKAN Firm

containing 240 serve Location

CENTER District in GILEEK County, West Virginia The surface of the above tract is council in fee by A. B. HINZHAN HEIRS

GLENVILLE, W. VA.

address and the mineral rights are owned by

Same

of Same.

The oil and gas privileges are held under lease by the above narrori company and this well is drilled under issued by the West Virginia Department of Mines Oil and Gas Section. DRILLED BEFORE JUNE 1929.

Elevation of surface at top of well.

The number of feet of the different sized casings used in the well

				feet.		
	750	feet 8im	Size	. esg.	size W	ood conductor.
	1540	feet 6-5/8"			feet	nized cag.
	1578		size.	esg.	feet	sized oug
		feet 2"	Size.	est.	feet	
	Hook Wall	packe	r of	81 x 6-5/8"		sized eng.
		packe	r of		size, set at 1540	
					size, set at	
		in easing perfora			feet to	-
		in casing perfora	ted at			feet.
NO	Coal was encountered at	-	feet i	hickness	feet to.	feet.
	feet; thickness	inches; and			inches, and at	
	Liners were used as f			feet :	thickness in	ches

OCTOBER 25, 1935.

Date

Approved by the a bound become the

AFFIDAVIT IN TRIPLICATE TO TIME AND MANNER OF PLUGGING AND FILLING WELL PRESUMER OF SECTION & ASTROLA & CHAPTER SE OF WEST VIRGINIA DEPARTMENT OF MINES OIL AND GAS DIVISION GARNEGIE DE CAL GAS COMPANY - 962-PHICK BUILDING ANDEX, PITTEBURGH, PENAL CONTENT ADDRESS COAL OPERATOR OR OWNER DECEMPER 23RD. 19.35

COAL OPERATOR OR OWNER WELL AND LOCATION

CENTER District

CILMER County COAL OPERATOR OF CHIEF

A. B. FINZMAN Farm

Well No. 1-1326

APPROANT TO BE MADE IN TRIPLICATE ONE COPY TO BE MAILED BY RESISTENCE WHILL TO THE DEPARTMENT ONE COPY TO BE SETAINED BY THE WELL ONERATOR AND THE THIRD COPY (AND SYTEA COPYSE IF REQUIRED) TO BE MAILED TO EACH COAL OPERATOR ABOVE HAMED AT THEIR RESPECTIVE ADDRESSES

AFFIDAVIT

STATE OF WEST VIRGINIA,

ADDRESS

COUNTY OF RITCHIE

W. L. Eritton, John Willerd and G. C. Ellifritt & H. E. Asher being first duly sworn according to law depose and say that they are experienced in the work of plugging

and filling oil and gas wells and were employed by CARNEGIE NATURAL CAS COMPANY..., well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the

4the day of NOVEMBER , 19 35 , and that the well was plugged and filled in the following manner:

Manner in which sand was plugged:
Total depth of well 1578°
Polled 1578° of 2° Tubing
Pilled with olay from 1578° to 1553°
Drove 6° Wood plug from 1553° to 1550°
Coment from 1550° to 1540°
Pilled 1540° of 6° Casing
Pilled with olay from 1540° to 1420°
Coment from 1420° to 1410° - Sealing Maxon Sand
Manner in which coal was plugged:

Filled with clay from 1410° to 760°
Drove 82° Wood plug from 760° to 757°
Coment from 757° to 750°
Pulled 750° of 82° Casing
Filled with clay from 750° to 400°
Coment from 400° to 390° = Sealing Big Dunkard Sand
Filled with clay to surface - Gas would not light when plugging was completed

Description of monument:

Concrete Fonument with 18" Base X 12" Top X 3' High with C. N. G. Co. #1326 engraved thereon

and that the work of plugging and filling said well was completed on the 21staday of DECEMBER

19.35