

west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax Earl Ray Tomblin, Governor Randy C. Huffman, Cabinet Secretary www.dep.wv.gov

PERMIT MODIFICATION APPROVAL

October 01, 2013

NOBLE ENERGY, INC. 333 TECHNOLOGY DRIVE, SUITE 110 CANONSBURG, PA 15317

Re: Permit Modification Approval for API Number 8510033 , Well #: PENS 1 HHS extended lateral

Oil and Gas Operator:

The Office of Oil and Gas has reviewed the attached permit modification for the above referenced permit. The attached modification has been approved and well work may begin. Please be reminded that the oil and gas inspector is to be notified twenty-four (24) hours before permitted well work is commenced.

Please call James Martin at 304-926-0499, extension 1654 if you have any questions.

Sincerely,

Gene Smith

Regulatory/Compliance Manager

Office of Oil and Gas



Laura Adkins Regulatory Analyst 724.820.3118 direct 412.841.9567 mobile

July 16, 2013

Laura Cooper West Virginia Department of Environmental Protection Office of Oil and Gas 601 57th St. S.E Charleston, WV 25304

Permit Modification Request – Wells PENS1FHS/PENS1GHS /PENS1HHS

Dear Laura,

Enclosed are permit modification requests to extend laterals on the above referenced wells. Please let me know of any deficiencies and we will provide the information you have requested.

If any further information or correspondence is required, please contact me at the above or by email ladkins@nobleenergyinc.com

Sincerely,

Laura Adkins

Laura L. adkens

Enclosure(s):

Received

1 9 2013

Office of Oil and Gas

WV Dept. of Environmental Protection

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS W.VA. CODE §22-6A - WELL WORK PERMIT APPLICATION

| 1) Well Operator: Noble Energy, Inc. 494501907 085-RITCHIE | Clay | Pennsboro | | | | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-------------------------|--|--|--|--|
| Operator ID County | District | Quadrangle | | | | |
| 2) Operator's Well Number: PENS1HHS Well Pad Name | e: PENS1HS | | | | | |
| 3 Elevation, current ground: 1110' Elevation, proposed post-construction: 1110' | | | | | | |
| 4) Well Type: (a) Gas Other Other | | | | | | |
| (b) If Gas: Shallow Deep Horizontal | | | | | | |
| 5) Existing Pad? Yes or No: Yes | | | | | | |
| 6) Proposed Target Formation(s), Depth(s), Anticipated Thicknesses and Associated MARCELLUS, Depth 6291' Thickness-78', Pressure-4204# | Pressure(s): | | | | | |
| 7) Proposed Total Vertical Depth: 6369' | | | | | | |
| 8) Formation at Total Vertical Depth: MARCELLUS | | | | | | |
| 9) Proposed Total Measured Depth: 14,581' | | | | | | |
| 10) Approximate Fresh Water Strata Depths: 130' | | | | | | |
| 11) Method to Determine Fresh Water Depth: Offset well data | | | | | | |
| 12) Approximate Saltwater Depths: 1525', 1805' | | | | | | |
| 13) Approximate Coal Seam Depths: No known coal in area | | | | | | |
| 14) Approximate Depth to Possible Void (coal mine, karst, other): None | | | | | | |
| 15) Does land contain coal seams tributary or adjacent to, active mine? | | | | | | |
| 16) Describe proposed well work: Case and cereating program. Drill a horizontal well and produce the Marcellus. Case and cereating program. | ment well as pres | cribed in the following | | | | |
| | | | | | | |
| 17) Describe fracturing/stimulating methods in detail: Well will be completed following the procedure attached. Offset wells will be monitored as described in attach | ned procedure. | y | | | | |
| | | | | | | |
| 18) Total area to be disturbed, including roads, stockpile area, pits, etc, (acres): | 15 acres | | | | | |
| 19) Area to be disturbed for well pad only, less access road (acres): 8.08 acres | Rece | ived | | | | |

19

20)

CASING AND TUBING PROGRAM

| ТҮРЕ | Size | New or Used | Grade | Weight per ft. | FOOTAGE: For Drilling | INTERVALS: Left in Well | CEMENT: Fill -up (Cu. Ft.) |
|--------------|---------|-------------------|--------|----------------|--------------------------|----------------------------|----------------------------------------------------|
| Conductor | 20" | New | LS | 81.3# | 40' | 40' | cts 15.6 PPG yield 1.2 to surface |
| Fresh Water | 13 3/8" | New | J-55 | 54.5# | 650' | 650' | cts 15.6 ppg 40% excess yield 1.19 |
| Coal | | | · | | | | |
| Intermediate | 9 5/8" | New | HCN80 | 40# | 5500' | 5500' | cts 15.6 ppg 30% excess yield 1.19 |
| Production | 5 1/2" | New | HCP110 | 20# | 14,581' | 14,581' | at least 500' above shallowest producing formation |
| Tubing | | | | | | | |
| Liners | | | | | | | |

Noble Energy, Inc. requests to run surface casing to 650' so that our casing point will be in competent rock.

| ТҮРЕ | Size | Wellbore Diameter | <u>Wall</u> <u>Thickness</u> | Burst Pressure | Cement Type | Cement Yield |
|--------------|---------|----------------------|---------------------------------|-------------------|----------------|--------------|
| Conductor | 20" | 26" | .438 | 2110 | Type 1 | 1.2 |
| Fresh Water | 13 3/8" | 17 1/2" | .380 | 2730 | Type 1 | 1.2 |
| Coal | | | | | | |
| Intermediate | 9 5/8" | 12 3/8" | .352 | 7910 | Type 1 | 1.19 |
| Production | 5 1/2" | 8 3/4" & 8 1/2" | .361 | 12,630 | Type 1 | 1.27 |
| Tubing | | | | | | |
| Liners | | | | | | |

PACKERS GCS 10/1/13

| Kind: | | |
|-------------|--|---------|
| Sizes: | | Rapping |
| Depths Set: | | |



DRILLING WELL PLAN PENS-1H-HS Macellus Shale Horizontal


Macellus Shale Horizonta Ritchie County, WV

| | | | | | | | Ritchie County, WV | | | | |
|-------------------------------------------|----------------|---------------------------------|----------------|---------|--------------------------------------------|------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|--|
| | | | | PE | ENS-1H | -HS (Ma | rcellus HZ) | | | | |
| Ground Elevation 1112' Landin | | | | | ng Point (NAD 27) N 308175.60 E 1577436.04 | | | | | | |
| SHL (NAD 27) N 307625.63, E 1577719.03 | | | BHL (NAD 27) | | | | N 314281.28, E 1572312.20 | | | | |
| WELLBORE DIAGRAM | HOLE | CASING | GEOLOGY | TOP TVD | BASE TVD | MUD | CEMENT | CENTRALIZERS | CONDITIONING | COMMENTS | |
| | 26* | 20* 52# LS | Conductor | 40 | 40 | AIR | 15.6 ppg Type I/II + 2% CaCI Yield = 1.2 To Surface | N/A | Ensure the hole is clean via air circulation at TD. | Conductor casing = 0.25* wall thickness | |
| x | 17.5* | 13-3/8" 54.5# J-55 BTC | Surface Casing | 650 | 650 | AIR | 15.6 ppg Type I/II + 2% CaCl, 0.25# Lost Circ 40% Excess Yield = 1.2 To Surface | Bow Spring on first 2 joints then every third joint to 100' form surface | Fill with KCI water once drilled to TD. Once casing is at setting depth, circulate a minimum of one hole volume prior to pumping cement. | Surface casing = 0.38 wall thickness Burst=2730 psi | |
| | | | Maxton Sand | 1968 | 2012 | AIR or 8.5ppg SOBM | Two stage cement job, stage tool at +/-2500° TVD. 1st stage lead=14.2 ppg, TOC=2500° TVD; tstage tail=15.6 ppg, | Bow Spring on first 2 joints then every third joint to 100' form surface | | Intermediate casing = 0.352* wall thickness Burst=3520 psi | |
| | | 9-5/8" 36# HCK-55 BTC | Big Lime | 2044 | 2121 | | | | | | |
| | | | Big Injun | 2121 | 2169 | | | | | | |
| | | | Weir Sand | 2488 | 2504 | | | | | | |
| | | | 5th Sand | 2960 | 2966 | | | | | | |
| | 40.05 | | Gordon | 2989 | 2991 | | | | | | |
| | 12.25 | | Warren Sand | 3571 | 3605 | | | | | | |
| | | | Speechley | 3889 | 4443 | 1 | TOC=4750' TVD; 2nd stage 14.2 ppg, | | | | |
| | | | Riley | 4640 | 4654 |] | TOC=Surface | | | | |
| | | | Benson | 4994 | 5000 | | | | | | |
| | | | Alexander | 5243 | 5249 | | | | | | |
| x x | | | Int. Casing | | 5300 | | | | | | |
| | 8.75" Vertical | 5.1/2* | | | | Open hole displace to 12.5ppg | 14.8ppg Class A 25:75:0 System +2.6% Cement | Rigid Bow Spring | ry joint to KOP, gid Bow Spring y third joint from three hours. Once on bottom with casing, circulate a minimum of one hole | Production casing = 0.361" wall thickness Burst=12640 psi | |
| | 8.75* Curve | | | | | SOBM @ KOP | extender, 0.7% Fluid Loss additive, 0.5% high temp retarder, | | | | |
| | | TXP BTC | Marcellus | 6291 | 6369 | | 0.2% friction reducer | | | | |
| 8.75" - 8.5" Lateral | 5* | | | | 12.5ppg SOBM | 10% Excess TOC >= 200° above 9.625° shoe | NOF 10 TOG | cement. | | | |
| X X |] | X | Onondaga | 6369 | 6372 | X | | X | | | |
| A: X: | | | | | | | TD @ +/-6359 TVD +/-14,581 MD | | | | |

Received

1.9 0013

Office of Oil and Gas WV Dept. of Environmental Protection

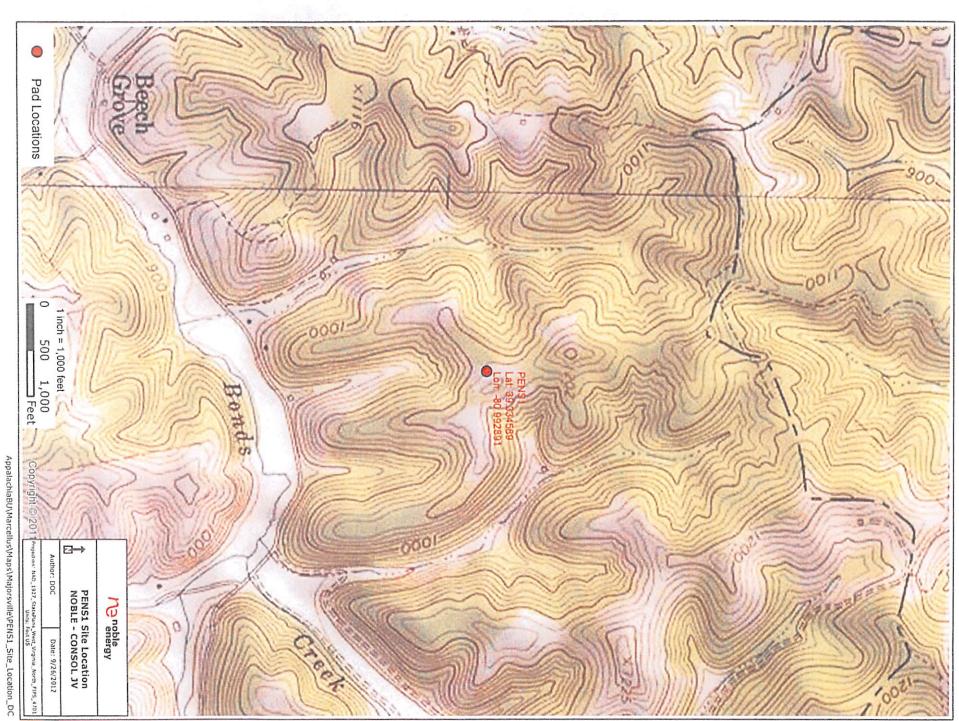

Disclaimer: All data is licensed for use hu Noble Energy Ync use only

