

STATE OF WEST VIRGINIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION
OFFICE OF OIL AND GAS

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE IN TRIPLICATE, one copy mailed to the Department, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

Farm name: Morris #671 Operator Well No.: 651986

LOCATION: Elevation: 1268' Quadrangle: Hundred
District: Church County: Wetzel
Latitude: _____ Feet South of _____ Deg. _____ Min. _____ Sec.
Longitude: _____ Feet West of _____ Deg. _____ Min. _____ Sec.

Well Type: OIL _____ GAS X

Company EOT Production Company Coal Operator Natural Resources Partners
1710 Pennsylvania Ave or Owner 5260 Irwin Road
Charleston WV 25302 Huntington WV 25705
Coal Operator Laura Williams ET AL
Agent Rex C. Ray or Owner HC 61 Box 168D
Permit Issued Date 03/01/2013 New Martinsville WV 26155

RECEIVED
Office of Oil & Gas

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of Upshur ss:

JUL 16 2013

Kevin Metz and Tim Marsh being first duly sworn according to law and depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by the above named well operator, and participated in the work of plugging and filling the above well say that said work was commenced on the 26th day of April, 2013 and the well was plugged and filled in the following manner:

| TYPE | FROM | TO | PIPE REMOVED | LEFT |
|--------|-------|-------|--------------|-------|
| Cement | 2384' | 2235' | 3" 2411' | 643' |
| Cement | 2235' | 2203' | 6 5/8" 0' | 2200' |
| Gel | 2203' | 1730' | 8 1/4" 0' | 1457' |
| Cement | 1807' | 1685' | 10" 0' | 252' |
| Gel | 1685' | 1462' | | |
| Cement | 1462' | 1360' | | |
| Gel | 1360' | 1051' | | |

continued on back.


Description of monument: 7" pipe above ground with API #
said well was completed on the 21st day of May, 2013.

And further deponents saith not. Jonathan R Marsh
Kevin Metz

Sworn and subscribe before me this 21st day of May, 2013

My commission expires: 06/12/2016

Denise H. Pulliam
Notary Public

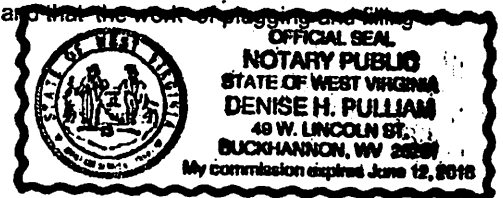

Affidavit reviewed by the Office of Oil and Gas: [Signature] Title: Inspector 07/19/2013

47-603-00771


Cement 1051' to 970'
Cement 970' to 790'
Gel 790' to 305'
Cement 305' to 0'

Perforated 3" at 2989' to 2999' 10 perfs

Cut 3" at 2403"

Perforated 6 5/8" at 985' 20 perfs

Perforated 6 5/8" at 86' to 870' 5 perfs

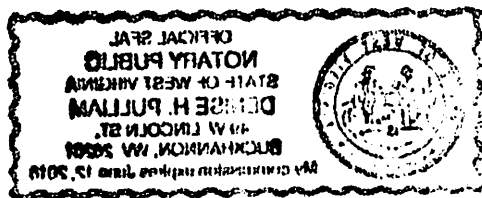

07/19/2013