

**STATE OF WEST VIRGINIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION
OFFICE OF OIL & GAS**

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE IN TRIPLICATE, one copy mailed to the Department, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

Farm Name: Hoyt L.S. Operator Well No.: 57
 Location: Elevation: 1420' Quadrangle: Pine Grove 7.5'
 District: Grant County: Wetzel
 Latitude: 39.602577 Feet South of: _____ Deg. _____ Min. _____ Sec. _____
 Longitude: -80.659638 Feet West of: _____ Deg. _____ Min. _____ Sec. _____

Well Type: Oil Gas _____ WIW _____

Company: HG Energy, LLC Coal Operator or Owner _____
5260 Dupont Road _____
Parkersburg, WV 26101 _____

Agent: Diane White Coal Operator or Owner _____

Permit Issued: 10/25/16

AFFIDAVIT

State of West Virginia, County of Wood ss:

Jared Stemple and Ken Dotson being first duly sworn according to law, depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by the above operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 31st day of October, 20 16 and the well was plugged and filled in the following manner:

TYPE	FROM	TO	PIPE REMOVED	LEFT
Class A Cement	3080'	2750'	5 3/16" 1155'	31'
Class A Cement	2600'	2275'	5 3/16" liner	601'
Class A Cement	1650'	1350'		
Class A Cement	1125'	1025'		
Class A Cement	725'	625'		
Class A Cement	200'	0'		

Perforated 5 3/16" liner 3100' - 3000' (one shot every 10'). Perforated 6 5/8" 1550' to 1350', 1125' to 1025', 725' to 625', 200' to 100' (one shot every 10'). 1080' to 1070' (one shot per foot). 6% gel between all cement plugs

Description of monument: 7" Cemented Pipe and that the work of plugging and filling said well was completed on the 4th day of November, 20 16


And further deponents saith not.

Sworn and subscribed before me this 12th day of DECEMBER, 20 16
 My commission expires: 11-2-2021

Notary Public [Signature]

Affidavit reviewed by the Office of Oil and Gas: [Signature]

Title: Oil & Gas Inspector

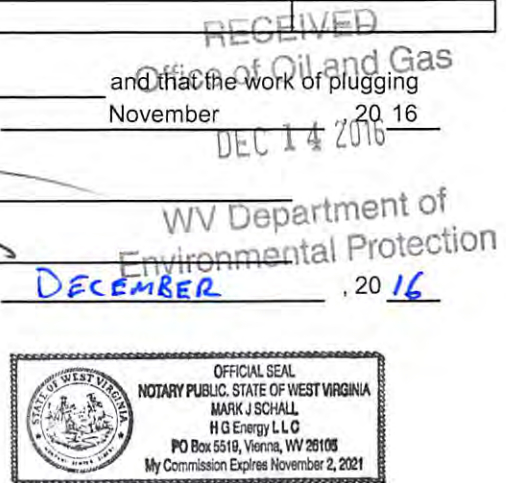

12/16/2016