

STATE OF WEST VIRGINIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION
OFFICE OF OIL & GAS

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE IN TRIPLICATED, one copy mailed to the Department, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

Farm Name: C.C. Pennick Operator Well No.: 23
Location: Elevation: 1346' Quadrangle: Centerpoint 7.5'
District: Green County: Wetzel
Latitude: 4,369,770 (NAD 83) Feet South of: _____ Deg. _____ Min. _____ Sec.
Longitude: 528,215 (NAD 83) Feet West of: _____ Deg. _____ Min. _____ Sec.

Well Type: Oil x Gas x WIW _____

Company: HG Energy, LLC Coal Operator _____
5260 Dupont Road or Owner _____
Parkersburg, WV 26101

Agent: Diane White Coal Operator _____
or Owner _____

Permit Issued: 6/14/16

AFFIDAVIT

State of West Virginia, County of Wood ss:

Jared Stemple and Ken Dotson being first duly sworn according to law, depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by the above operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 17th day of June, 20 16 and the well was plugged and filled in the following manner:

TYPE	FROM	TO	PIPE REMOVED	LEFT
Class A Cement	3100'	2650' (tagged)	2 3/8" 3100'	
Class A Cement	1400'	1150'	3 1/2" 2672'	
Class A Cement	340'	0'	5 3/16"	2373'
Perforated Liner 3050' - 2950' (one shot every 10'). Perforated 5 3/16" casing 1400' to 1350', 1250' to 1150', 260' to 160' (one shot every 10') and 1205' to 1195' (one shot per foot).				
RECEIVED				
Office of Oil and Gas				
6% gel between all cement plugs				

Description of monument: 7" Cemented Pipe and that the work of plugging and filling said well was completed on the 24th day of June, 20 16

And further deponents saith not.

[Signature]
Keneth Dotson


Sworn and subscribed before me this 12th day of July, 20 16

My commission expires: 7-11-2022

Notary Public Diane White

Affidavit reviewed by the Office of Oil and Gas: Derek M. Haight

Title: Oil & Gas Inspector

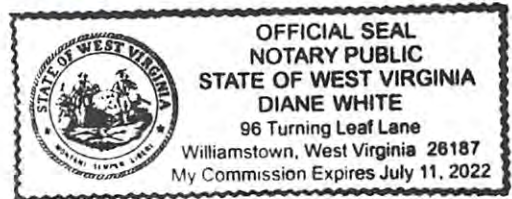

08/05/2016