

STATE OF WEST VIRGINIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION
OFFICE OF OIL & GAS

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE IN TRIPLICATE, one copy mailed to the Department, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

Farm Name: WV Public Lands Corp. Operator Well No.: Irene Reilly 15
 Location: Elevation: 1169' Quadrangle: Centerpoint 7.5'
 District: Green County: Wetzel
 Latitude: 2,075 Feet South of: 39 Deg. 30 Min. Sec.
 Longitude: 7500 Feet West of: 80 Deg. 40 Min. Sec.

Well Type: Oil X Gas WIW

Company: HG Energy, LLC Coal Operator or Owner
5260 Dupont Road
Parkersburg, WV 26101

Agent: Diane White Coal Operator or Owner

Permit Issued: 8/3/15

AFFIDAVIT

State of West Virginia, County of Wood ss:

Jared Stemple and Ken Dotson being first duly sworn according to law, depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by the above operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 12th day of July, 20 16 and the well was plugged and filled in the following manner:

TYPE	FROM	TO	PIPE REMOVED	LEFT
Class A Cement	2990'	2890'	4 1/2" 1467'	1673'
Class A Cement	1550'	1420'		
Class A Cement	1225'	900'		
Class A Cement	500'	400'		
Class A Cement	100'	0'		
CIB Plug set @ 2990'. Bond log showed cement on back side of 4 1/2" casing @ 1522'.				
6% gel between all cement plugs				

Description of monument: 7" Cemented Pipe and that the work of plugging and filling said well was completed on the 15th day of July, 20 16

And further deponents saith not.


Sworn and subscribed before me this 24th day of October, 20 16
My commission expires: July 22, 2022

Notary Public Diane White

Affidavit reviewed by the Office of Oil and Gas: Jacqueline Thante

Title:

RECEIVED 20 16
Office of Oil and Gas
OCT 31 2016
WV Department of Environmental Protection

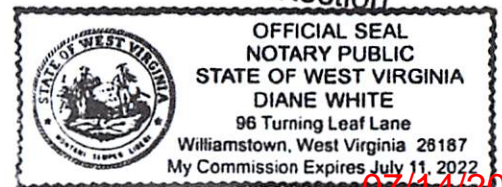

07/14/2017