

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE STREET MONONGAH, WV 26554
Address

CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE STREET MONONGAH, WV 26554
Address
TOMMY L. SNODGRASS
Lease or Property Owner
103 FAIR OAKS DR. FAIRMONT, WV 26554
Address

CONSOLIDATION COAL CO.
Name of Well Operator
1 BRIDGE STREET MONONGAH, WV 26554
Complete Address
GLOVER GAP 7.5'
Well Location
MANNINGTON
District
MARION
County
5262
Well No.
SNODGRASS, TOMMY L.
Farm

STATE INSPECTOR SUPERVISING PLUGGING *[Signature]* 4-20-12

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

DELBERT MOORE and KEVIN WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 22nd day of February, 2012 and that the well was plugged in the following manner:

Sand or Zone Record	Filling Material	Casing/Tubing Size	Casing Pulled	Casing Left In
Formation				
	Drilled cement with 15" bit from the surface to 56'. Reduced hole to 12 1/4". Drilled cement with 12 1/4" bit from 56' to bottom of cement plug at 100'. Cleaned 12 1/4" hole from 100' to 168'. Reduced hole to 9 7/8". Cleaned 9 7/8" hole from 168' to top of 7" casing at 850'. Reduced hole to 6 1/4". Cleaned 6 1/4" hole from 850' to 1842'. Tagged plug at 1842'. Removed 210' of 7" casing from 850' to 1060'. Left 708' of 7" casing in the hole from 1060' to 1768'. Cut remaining 7" casing at the following depths; 1169', 1569', 1469', 1369', 1269' and 1169'. Cleaned 9 7/8" hole from 850' to 1060'. Cleaned 9 7/8" hole through Pittsburgh Coal (799' - 807'). Left 20' of 16" conductor pipe in the hole from 20' to surface. Cemented hole from 1842' back to surface as follows; From 1842' to 1007' with 138 sacks of Super Lite Cement. From 1007' to 699' with 145 sacks of SuperTropic Cement with white dye. From 699' to surface with 250 sacks of Super Lite Cement. A total of 533 sacks of cement were used to fill the hole from 1842' back to surface. Cement did circulate at the surface.	16" Conductor 7" Casing	0' 210'	20' 708'
Coal Seams		Description of Monument		
<u>Pittsburgh</u>	(799' - 807')	77" of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to cement plug at ground level.		

... and that the work of plugging and filling said well was completed on the 19th day of March, 2012


And further deponents saith not.

Delbert Moore
Delbert Moore

Kevin S. Wright
Kevin S. Wright


Sworn to and subscribed before me this 18th day of April, 2012

My commission expires:
March 18, 2020

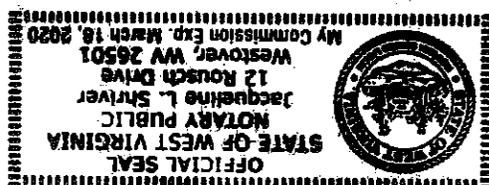

Jacquelin L. Shriver
Notary Public

Permit No. 47-049-01362-P
Well No. 5262

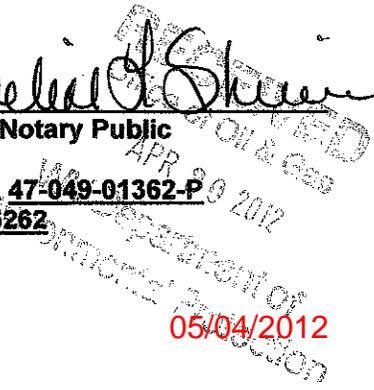

05/04/2012