

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL CO.  
Coal Operator or Owner  
1 BRIDGE STREET MONONGAH, WV 26554  
Address  
CONSOLIDATION COAL CO.  
Coal Operator or Owner  
1 BRIDGE STREET MONONGAH, WV 26554  
Address  
JEFFREY MICHAEL  
Lease or Property Owner  
P.O BOX 211 MANNINGTON, WV 26582  
Address

CONSOLIDATION COAL CO.  
Name of Well Operator  
1 BRIDGE STREET MONONGAH, WV 26554  
Complete Address  
GLOVER GAP 7.5'  
Well Location  
MANNINGTON  
District  
MARION  
County  
5129  
Well No.  
MICHAEL JEFFERY  
Farm

STATE INSPECTOR SUPERVISING PLUGGING *William H. ...* 3-6-13

AFFIDAVIT

STATE OF WEST VIRGINIA,  
County of MONONGALIA ss:

MIKE MITCHELL and KEVIN WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 28<sup>th</sup> day of December, 2012 and that the well was plugged in the following manner:

Sand or Zone Record Formation	Filling Material	Casing/Tubing Size	Casing Pulled	Casing Left In
Cleaned 12 1/4" hole from the surface to the top of the 10 3/4" casing at 113'. Reduced hole to 9 7/8". Cleaned 9 7/8" hole from 113' to the top of the 8 5/8" casing at 413'. Reduced hole to 7 7/8". Cleaned 7 7/8" hole from 413' to 1454'. Tagged solid plug at 1454'. Removed 1020' of 8 5/8" casing from 413' to 1433'. Left unknown amount of 8 5/8" casing in the hole from 1433' to unknown depth. Left 79' of 10 3/4" casing in the hole from 113' to 192'. Cleaned 9 7/8" hole from the surface 413' to 1433'. Cleaned 9 7/8" hole through the Pittsburgh Coal seam from 1066' to 1074'. Left 12' of 16" conductor casing in the hole from the surface to 12'.		16" Conductor	0'	12'
		10 3/4" Casing	0'	79'
		8 5/8" Casing	1020'	Unknown
<p><u>Cemented hole from 1454' back to surface as follows:</u> From 1454' to 1274' with 65 sacks of SuperLite Cement. From 1274' to 986' with 160 sacks of Super Tropic Cement with White Dye. From 986' to surface with 323 sacks of SuperLite Cement. A total of 388 sacks of SuperLite Cement and 160 sacks of Super Tropic Cement was used to fill the hole from 1454' back to surface. Cement did circulate at the surface.</p>				
Coal Seams		Description of Monument		
<u>Pittsburgh</u>	<u>(1066' - 1074')</u>	<u>77' of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to cement plug at ground level.</u>		

RECEIVED  
Office of Oil & Gas  
MAR 06 2013


WV Department of Environmental Protection

... and that the work of plugging and filling said well was completed on the 16<sup>th</sup> day of January, 2013


And further deponents saith not.

*Mike Mitchell*  
Mike Mitchell

*Kevin S. Wright*  
Kevin S. Wright



My commission expires:  
March 18, 2020

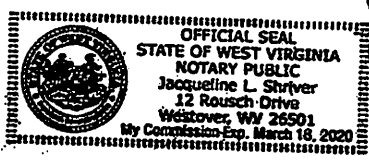

*Jacqueline L. Shriver*  
Notary Public

Permit No. 47-049-02235-P  
Well No. 5129

03/08/2013