

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE ST. MONONGAH WV 26582
Address
CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE ST. MONONGAH WV 26582
Address
DOUGLAS L AND KIMBERLY J CYPHERS
Lease or Property Owner
8 SMOKEY VALLEY ROAD, MANNINGTON, WV 26582
Address

CONSOLIDATION COAL CO.
Name of Well Operator
1 BRIDGE ST. MONONGAH, WV 26582
Complete Address
CLOVER GAP 7.5'
Well Location
MANNINGTON
District
MARION
County
5156
Well No.
CYPHERS, DOUGLAS L & KIMB
Farm

STATE INSPECTOR SUPERVISING PLUGGING *William H. ...* 5-30-13

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

MIKE MITCHELL and **KEVIN S. WRIGHT** being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 4th day of March, 2013 and that the well was plugged in the following manner:

Formation	Filling Material	Casing Size & Kind	Casing Pulled	Casing Left In
	Cleaned 12 1/2" hole from the surface to 250'. Reduced hole to 9 7/8". Cleaned 9 7/8" hole from 250' to 1145'. Drilled cement from 590' to 658'. Reduced hole to 7 7/8". Cleaned 7 7/8" hole from 1145' to 1165'. Tagged solid plug at 1165' with 3 1/2" drill pipe. Cleaned 9 7/8" hole through the Pittsburgh Coals seam from 722' to 728'. Left 17' of 16" conductor casing in the hole from the surface to 17'.	16" Conductor	0'	17'
	Cemented hole from 1165' back to surface as follows: From 1165' to 928' with Superlite Cement. From 928' to 622' with 125 sacks of Thixotropic Cement w/ dye. From 622' to surface with Superlite Cement. A total of 394 sacks of Superlite Cement and 125 sacks of Thixotropic Cement was used to cement the hole from 1165' to surface. Cement did circulate at the surface.			
Coal Seams		Description of Monument		
PITTSBURGH	722' to 728'	77" of 7" casing w/company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to the cement plug at ground level.		
(Name)				
(Name)				
(Name)				

RECEIVED
Office of Oil & Gas
MAY 30 2013
WV Department of
Environmental Protection

... And that the work of plugging and filling said well was completed on the 16th day of March, 2013

And further deponents saith not.


Mike Mitchell
Mike Mitchell

Kevin S. Wright
Kevin S. Wright

Sworn to and subscribed before me this 1st day of April 2013

Carol A. Mayle
Notary Public

My commission expires: 9-12-2017

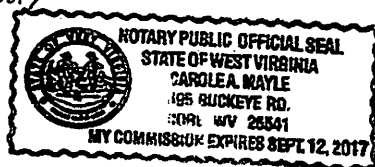

Permit No. 47-49-02246-P
Well No. 5156

05/31/2013