

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE STREET MONONGAH, WV 26554
Address
CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE STREET MONONGAH, WV 26554
Address
CONSOLIDATION COAL CO.
Lease or Property Owner
1 BRIDGE STREET MONONGAH, WV 26554
Address

CONSOLIDATION COAL CO.
Name of Well Operator
1 BRIDGE STREET MONONGAH, WV 26554
Complete Address
GLOVER GAP 7.5'
Well Location
MANNINGTON
District
MARION
County
5115
Well No.
CONSOLIDATION COAL COMPANY
Farm

STATE INSPECTOR SUPERVISING PLUGGING *William F. ...* 3-16-13

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

MIKE MITCHELL and KEVIN WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 7th day of February, 2013 and that the well was plugged in the following manner:

Sand or Zone Record Formation	Filling Material	Casing/Tubing Size	Casing Pulled	Casing Left In
Clean 12 1/4" hole from the surface to 323'. Reduce hole to 9 7/8". Clean 9 7/8" hole from 323' to 557'. Tag top of 8 5/8" casing at 557'. Reduce hole to 7 7/8". Clean 7 7/8" hole from 557' to 1596'. Reduce hole to 6 1/4". Clean 6 1/4" hole from 1596' to 1608'. Remove 581' of 8 5/8" casing from 557' to 1138'. Left 132' of 8 5/8" casing in the hole from 1138' to 1270'. Cut 8 5/8" casing at the following depth: 1170'. Clean 9 7/8" hole from 557' to 1138'. Cleaned 9 7/8" hole through the Pittsburgh Coal seam from 822' to 832'. Left 70' of 16" conductor casing in the hole from the surface to 70'.		16" Conductor 8 5/8" Casing	0' 581'	20' 132'
<p>Cemented hole from 1608' back to surface as follows: From 1608' to 1032' with 159 sacks of SuperLite Cement. From 1032' to 722' with 150 sacks of Thixotropic Cement with dye. From 722' to surface with 415 sacks of SuperLite Cement. A total of 574 sacks of SuperLite Cement and 150 sacks of Super Tropic Cement was used to fill the hole from 1608' back to surface. Cement did circulate at the surface.</p>				
Coal Seams		Description of Monument		
Pittsburgh	(822' - 832')	77' of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to cement plug at ground level.		

RECEIVED
Office of Oil & Gas
MAR 06 2013
WV Department of
Environmental Protection

... and that the work of plugging and filling said well was completed on the 22nd day of February, 2013

And further deponents saith not.


Mike Mitchell
Mike Mitchell

Kevin S. Wright
Kevin S. Wright

Sworn to and subscribed before me this 1st day of March 2013

Candice A. ...
Notary Public

My commission expires: 9-12-2017

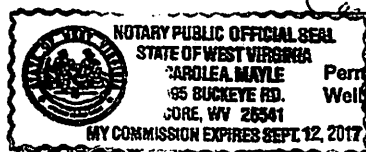

Permit No. 47-049-02247-P
Well No. 5115

03/08/2013