

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE ST. MONONGAH WV 26554
Address
CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE ST. MONONGAH WV 26554
Address
CONSOLIDATION COAL CO.
Lease or Property Owner
1 BRIDGE ST. MONONGAH, WV 26554
Address

CONSOLIDATION COAL CO.
Name of Well Operator
1 BRIDGE ST. MONONGAH, WV 26554
Complete Address
GLOVER GAP 7.5'
Well Location
MANNINGTON
District
MARION
County
5010
Well No.
CONSOLIDATION COAL COMPA
Farm

STATE INSPECTOR SUPERVISING PLUGGING *Bill Henderson 3-9-14*
AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

RALPH HARMAN and **KEVIN S. WRIGHT** being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 27th day of January, 2014 and that the well was plugged in the following manner:

Formation	Filling Material	Casing Size & Kind	Casing Pulled	Casing Left In
Cleaned 12 1/2" hole from surface to 257'. Reduced hole to 9 7/8". Cleaned 9 7/8" hole from 257' to 1002' Cleaned 9 7/8" hole through the Pittsburgh Coal seam from 773' to 781'. Reduced hole to 7 7/8". Cleaned 7 7/8" hole from 1002' to 1015'. Reduced hole to 6 1/2". Cleaned 6 1/2" hole from 1015' to 1239'. Reduced hole to 3 1/2". Cleaned 3 1/2" hole from 1239' to 1630'. Tagged solid plug at 1630'.		16" Conductor 7" Casing	0' 0'	10' 217'
Cemented hole from 1630' back to surface as follows: From 1630' to 1240' with Gel Plug. Tagged top of bottom hole plug at 1240'. From 1240' to 981' with 40 sacks of Expandable Cement. From 981' to 673' with 180 sacks of Thixotropic Cement with green dye. From 673' to the surface with 360 sacks of Expandable Cement. A total of 580 sacks of both cements were used to cement the hole from 1630' to the surface. Cement did circulate at the surface. Left 10' of 16" conductor casing in the hole from the surface to 10'.				
Coal Seams		Description of Monument		
<u>PITTSBURGH</u>	773' to 781'	77" of 7" casing w/company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to the cement plug at ground level.		
(Name)				
(Name)				

RECEIVED
Office of Oil & Gas
MAR 13 2014
WV Department of Environmental Protection

... And that the work of plugging and filling said well was completed on the 12th day of February, 2014.

And further deponents saith not.

Ralph Harman
Ralph Harman


Kevin S. Wright
Kevin S. Wright

Sworn to and subscribed before me this 24th day of Feb 2014

Carol A. Mayh
Notary Public

My commission expires: 9-12-2017

Permit No. 47-49-02276-P
Well No. 5010

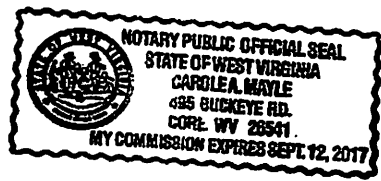

03/14/2014