

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

**MCELROY COAL COMPANY**  
Coal Operator or Owner  
RD. #4 BOX 425 MOUNDSVILLE, WV 26041  
Address

**MCELROY COAL COMPANY**  
Coal Operator or Owner  
RD. #4 BOX 425 MOUNDSVILLE, WV 26041  
Address

**RICHARD C. & ROGER KUPFER**  
Lease or Property Owner  
RD 4 BOX 168 CAMERON, WV 26033  
Address

**MCELROY COAL COMPANY**  
Name of Well Operator  
RD. #4 BOX 425 MOUNDSVILLE, WV 26041  
Complete Address

**CAMERON, WV - PA 7.5**  
Well Location

**CAMERON**  
District  
**MARSHALL**  
County

**M-1553**  
Well No.

**KUPFER, RICHARD C. & ROGER**  
Farm

STATE INSPECTOR SUPERVISING PLUGGING *[Signature]*

AFFIDAVIT

STATE OF WEST VIRGINIA,  
County of MONONGALIA ss:

**DAVID HARMAN and KEVIN WRIGHT** being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 27<sup>th</sup> day of October, 2010 and that the well was plugged in the following manner:

Sand or Zone Record	Filling Material	Plugs Used	Casing Pulled	Casing Left In
Formation		Size & Kind		
Cleaned 12 1/4" hole from the surface to 275'. Cleaned 9 7/8" hole from 275' to 1006'. Cleaned 7 7/8" hole from 1006' to 1330'. Cleaned 6 1/4" hole from 1330' to 2662'. Tagged plug at 2662'. Cemented bottom hole from 2662' back to 1600' with 190 sacks of Expandable Cement. Gel plugged the hole with 9.6ppg aquagel from 1600' to 1440'. Left 311' of 7" casing in the hole from 1771' to 2082'. Cut remaining 7" casing at 1966' and 1862'. Left 313' of 8 5/8" casing in the hole from 1006' to 1319'. Cut remaining 8 5/8" casing at 1271' and 1140'. Cleaned 9 7/8" hole thru Pittsburgh Coal (918' to 926'). Left 20' of 16" conductor pipe in hole from 20' to surface.	16" Conductor 8 5/8" Casing 7" Casing	0' 0' 0'	20' 313' 311'	
<b>Cement hole from 2662' back to surface as follows:</b>				
From 2662' to 1600' with 190 sacks of Expandable Cement. From 1600' to 1440' with a 9.6ppg Aquagel plug. From 1440' to 1126' with Expandable Cement From 1126' to 818' with 165 sacks of Thixotropic Cement w/ dye. From 818' to surface with Expandable Cement. A total of 800 sacks of cement were used to fill the hole from 2662' to surface. Cement did circulate at the surface.				
<b>Coal Seams</b>		<b>Description of Monument</b>		
<b>Pittsburgh</b>	918' to 926'	77" of 7" casing w/company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to the cement plug at ground level.		
(Name)				
(Name)				
(Name)				

RECEIVED  
Office of Oil & Gas  
OCT 17 2011  
WV Department of Environmental Protection

... and that the work of plugging and filling said well was completed on the 16<sup>th</sup> day of November, 2010

And further deponents saith not.

*[Signature]*  
David Harman


*[Signature]*  
Kevin S. Wright

Sworn to and subscribed before me this 20<sup>th</sup> day of September, 2011

*[Signature]*  
Notary Public

My commission expires:

June 1, 2015

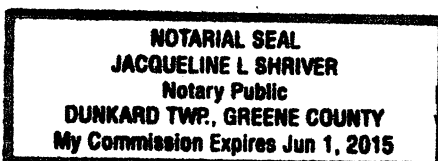

Permit No. 47-51-00177-P  
Well No. M-1553