

STATE OF WEST VIRGINIA
DEPARTMENT OF ENERGY
OIL AND GAS WELLS DIVISION

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL CO. - OHIO VALLEY OPERATIONS
Coal Operator or Owner
6126 ENERGY DRIVE MOUNDSVILLE, WV 26041
Address

CONSOLIDATION COAL CO. RIVER OPERATIONS
Coal Operator or Owner
6126 ENERGY DRIVE MOUNDSVILLE, WV 26041
Address

CHARLES ALBERT WITSBERGER II
Lease or Property Owner
250 DRY RIDGE ROAD, CAMERON, WV 26033
Address

CONSOLIDATION COAL CO. - OHIO VALLEY OPERATIONS
Name of Well Operator
6126 ENERGY DRIVE MOUNDSVILLE, WV 26041

Complete Address
MAJORSVILLE, WV 7.5

Well Location
WEBSTER

District
MARSHALL

County
SGW-155

Well No.
WITSBERGER, CHARLES ALBERT

Farm

STATE INSPECTOR SUPERVISING PLUGGING _____

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

MARK WILSON and KEVIN WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 7th day of January, 2013 and that the well was plugged in the following manner:

Sand or Zone Record	Filling Material	Plugs Used Size & Kind	Casing Pulled	Casing Left In
Formation				
Left 1085' of 7" casing in the hole from the surface to 1805'. Cut 7" casing at the following depths: 1703', 1609', 1514', 1417', 1300', 1115', 1020', 895' and 563'. Section milled 10' window in 7" casing from 1231' to 1241'. Perforated 7" casing at the following depths: 1000', 1100' and 1200'. Sand cut 7", 8 5/8" and 10 3/4" casing at the following depths: 872', 772', 722', 674', 672', 670', 668', 665.9', 664', 615', and 565'. Cemented bottom hole from 1825' to 930' with 135 sacks of Expandable Cement. Left 1231.9' of 8 5/8" casing in the hole from the surface to 1231.9'. Left 694.4' of 10 3/4" casing in the hole from the surface to 694.4'. Left 159' of 13 3/8" casing from the surface to 159'. All casing is bonded together. Sand cut 7", 8 5/8" and 10 3/4" casing through the Pittsburgh Coal seam from 668' to 672'.				
<u>Cemented hole from bottom hole plug at 930' back to surface as follows:</u> From 930' to 572' with 90 sacks of Thixotropic Cement with green dye. From 572' to surface with 95 sacks of Expandable Cement. A total of 230 sacks of Expandable Cement and 90 sacks of Thixotropic Cement was used to fill the hole from 1825' to surface. Cement did circulate at the surface.				
Coal Seams		Description of Monument		
Pittsburgh Coal	668' to 672'	77" of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to the cement plug at ground level.		
(Name)				
(Name)				
(Name)				

RECEIVED
Office of Oil & Gas
FEB 04 2013
WV Department of
Environmental Protection

... and that the work of plugging and filling said well was completed on the 21st day of January, 2013

And further deponents saith not.

Mark Wilson
Mark Wilson


Kevin S. Wright
Kevin S. Wright

Sworn to and subscribed before me this 30th day of January 2013

Jacqueline L. Shriver
Notary Public

My commission expires:

March 18, 2020

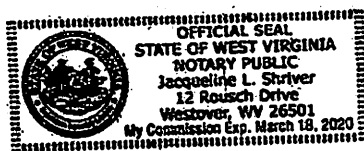

Permit No. 47-051-00327-P
Well No. SGW-155

02/08/2013