

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

| | |
|---|--|
| <p><u>CONSOLIDATION COAL COMPANY- RIVER OPERATIONS</u> Coal Operator or Owner <u>RD 4 BOX 425 MOUNDSVILLE, WV 26041</u> Address</p> <p><u>CONSOLIDATION COAL COMPANY- RIVER OPERATIONS</u> Coal Operator or Owner <u>RD 4 BOX 425 MOUNDSVILLE, WV 26041</u> Address</p> <p><u>CONSOLIDATION COAL CO.</u> Lease or Property Owner <u>1000 CONSOL ENERGY DRIVE CANONSBURG, PA 15317</u> Address</p> | <p><u>CONSOLIDATION COAL COMPANY- RIVER OPERATIONS</u> Name of Well Operator <u>RD 4 BOX 425 MOUNDSVILLE, WV 26041</u> Complete Address <u>MAJORSVILLE, WV 7.5</u> Well Location <u>WEBSTER</u> District <u>MARSHALL</u> County <u>SGW-101</u> Well No. <u>CONSOLIDATION COAL CO.</u> Farm</p> |
|---|--|

STATE INSPECTOR SUPERVISING PLUGGING _____

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

ROBERT STEEL and KEVIN WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 22nd day of May, 2012 and that the well was plugged in the following manner:

| Sand or Zone Record | Filling Material | Plugs Used Size & Kind | Casing Pulled | Casing Left In |
|---------------------|---|--|----------------------------------|---|
| Formation | | | | |
| | Cleaned 3 5/8" hole from the surface to 1809'. Bottom of 4 1/2" casing at 1760'. Ran cement bond log on 4 1/2" casing. Cement bond log indicated that the 4 1/2" casing was cemented in the hole from 1760' to surface. Left 1760' of 4 1/2" casing in the hole from 1760' to surface. Perforated remaining 4 1/2" casing w/ 6 shots at each of the following depths; 1650', 1550', 1450', 1350', 1250', 1150', 1050' and 950'. Cemented bottom hole from 1809' to 900' with 70 sacks of Expandable Cement w/ a Gas Blocker additive. Left an unknown amount of 7" casing in the hole from the surface to an unknown depth. Left an unknown amount of 8 5/8" casing in the hole from the surface to an unknown depth. Sand cut 4 1/2", 7", 8 5/8" and 10 3/4" casings at the following depths; 855', 805', 755', 705', 657', 655', 653.5', 652', 650.5', 649', 647' and 597'. Sand cut 4 1/2", 7", 8 5/8" and 10 3/4" casing through the Pittsburgh Coal (649' - 655'). Left 20' of 16" conductor pipe in the hole from 20' to surface. Cemented hole from 1809' to surface as follows: From 1809' to 900' with 70 sacks of Expandable Cement w/ a Gas Blocker additive. From 900' to 549' w/ 70 sacks of Thixotropic Cement with green dye. From 549' to surface w/ 20 sacks Expandable Cement. A total of 160 sacks of cement were used to fill the hole from 1809' to surface. Cement did circulate at the surface. | 16" Conductor 10 3/4" Casing 8 5/8" Casing 7" Casing 4 1/2" Casing | 0' 0' 0' 0' | 20' Unknown Unknown Unknown 1760' |
| Coal Seams | | Description of Monument | | |
| <u>PITTSBURGH</u> | 649' to 655' | 77" of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to the cement plug at ground level. | | |

RECEIVED
Office of Oil & Gas
JUL 16 2012

WV Department of
Energy & Mineral Resources

... and that the work of plugging and filling said well was completed on the 1st day of June 2012

And further deponents saith not.


Robert Steel
Robert Steel

Sworn to and subscribed before me this 25th day of June, 2012

Kevin S. Wright
Kevin S. Wright

Angeline Shriver
Notary Public

My commission expires:
March 18, 2020

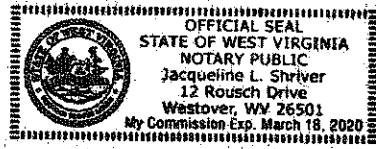

Permit No. 47-051-00651-P
Well No. SGW-101

07/20/2012