

AFFIDAVIT OF PLUGGING AND FILLING WELL.

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

MCELROY COAL COMPANY
Coal Operator or Owner
6126 ENERGY DRIVE MOUNDSVILLE, WV 26041
Address
MCELROY COAL COMPANY
Coal Operator or Owner
6126 ENERGY DRIVE MOUNDSVILLE, WV 26041
Address
JAMES E. REDD
Lease or Property Owner
13241 WAYNESBURG PIKE ROAD CAMERON, WV 26033
Address

MCELROY COAL COMPANY
Name of Well Operator
6126 ENERGY DRIVE MOUNDSVILLE, WV 26041
Complete Address
CAMERON, WV 7.5'
Well Location
CAMERON
District
MARSHALL
County
M-1653
Well No.
REDD, JAMES E.
Fann

STATE INSPECTOR SUPERVISING PLUGGING *William H. ...* 7-16-13

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

MARK WILSON and **KEVIN S. WRIGHT** being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 23rd day of April, 2013 and that the well was plugged in the following manner:

Sand or Zone Record	Filling Material	Casing/Tubing Size	Casing Pulled	Casing Left In
Formation				
Perforated 8 5/8" casing with 6 shots at the following depths: 4600', 4400', 4200', 4000', 3800', 3600', 3400', 3200', 3000', 2800', 2600', 2400', 2200', 2000' and 1800'. Removed 1533' of 4 1/2" casing from the surface to 1553'. Left 3247' of 4 1/2" casing in the hole from 1553' to 4800' due to the casing being bonded. Cleaned 3 1/2" hole from the surface to 5476'. Tagged solid plug at 5476'. Cemented bottom hole plug from 5476' to 3510' and from 3510' to 1560' with 210 sacks of Expandable Cement with Gas Blocker additive. Left Unknown amount of 8 5/8" casing in the hole from the surface to unknown depth. Cut 8 5/8" casing at the following depths: 1360', 1260', 1160', 743', 550', 357' and 160'. Section Milled 2 windows in the 8 5/8" casing, from 1460' to 1465' and from 935' to 955'. Cleaned inside of the 8 5/8" casing through the Pittsburgh Coal seam from 942' to 948'.	8 5/8" Casing 4 1/2" Casing	0' 1553'	Unknown 3247'	
Cemented hole from the top of the bottom hole plug at 1560' to surface as follows: From 1560' to 1148' with Expandable Cement. From 1148' to 842' with 110 sacks of Thixotropic Cement with green dye. From 842' to surface with Expandable Cement. A total of 250 sacks of Expandable Cement and 110 sacks of Thixotropic Cement were used to cement the hole from 1165' to surface. Cement did circulate at the surface.				
Coal Seams		Description of Monument		
Pittsburgh	(942' - 948')	77' of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to the cement plug at ground level.		

RECEIVED
Office of Oil & Gas
JUL 22 2013
WV Department of
Environmental Protection

... and that the work of plugging and filling said well was completed on the 7th day of June, 2013

And further deponents saith not.


Mark Wilson
Mark Wilson

Kevin S. Wright
Kevin S. Wright

Sworn to and subscribed before me this 24th day of June 2013

Carol A. Mayle
Notary Public

My commission expires: 9-12-2017

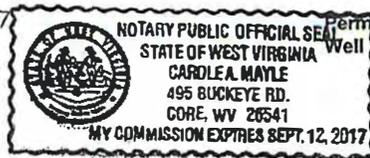

Permit No. 47-51-00690-P
Well No. M-1653

07/26/2013