

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

MCELROY COAL COMPANY
Coal Operator or Owner
6126 ENERGY DRIVE MOUNDSVILLE, WV 26041
Address

MCELROY COAL COMPANY
Coal Operator or Owner
6126 ENERGY DRIVE MOUNDSVILLE, WV 26041
Address

CARL E. BROWELL
Lease or Property Owner
RD.3 BOX 117 CAMERON, WV 26033
Address

MCELROY COAL COMPANY
Name of Well Operator
6126 ENERGY DRIVE MOUNDSVILLE, WV 26041
Complete Address
CAMERON, WV 7.5'
Well Location
CAMERON
District
MARSHALL
County
M-1528
Well No.
BROWELL, CARL E.
Farm

STATE INSPECTOR SUPERVISING PLUGGING _____

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

MARK WILSON and **KEVIN WRIGHT** being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 14th day of May, 2012 and that the well was plugged in the following manner:

Sand or Zone Record Formation	Filling Material	Casing/Tubing Size	Casing Pulled	Casing Left In
Cleaned 12 3/4" hole from the surface to top of 10 3/4" casing at 154'. Reduced hole to 9 7/8" at 154'. Cleaned 9 7/8" hole from 154' to top of 8 5/8" casing at 1123'. Reduced hole to 7 7/8" at 1123'. Cleaned 7 7/8" hole from 1123' to 1629'. Tagged plug at 1629'. Left 62' of 10 3/4" casing in the hole from 154' to 216'. Left 228' of 8 5/8" casing in the hole from 1123' to 1351'. 8 5/8" casing was cut and ripped at 1167' and 1264'. Cleaned 9 7/8" hole through the Pittsburgh Coal (943' - 949'). Left 20' of 16" conductor pipe in the hole from 20' to surface.		16" Conductor	0'	20'
		10 3/4" Casing	0'	62'
		8 5/8" Casing	0'	228'
Cemented hole from 1629' to surface as follows: From 1629' to 1149' with Expandable Cement. From 1149' to 843' with 160 sacks of Thixotropic Cement with green dye. From 843' to surface with Expandable Cement. A total of 390 sacks of Expandable Cement and 160 sacks of Thixotropic Cement were used to fill the hole from 1629' to surface. Cement did circulate at the surface.				
Coal Seams		Description of Monument		
Pittsburgh	(943' - 949')	77" of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to the cement plug at ground level.		

RECEIVED
Office of Oil & Gas
JUL 16 2012
WV Department of
Environmental Protection

... and that the work of plugging and filling said well was completed on the 1st day of June, 2012

And further deponents saith not.


Mark Wilson
Mark Wilson

Kevin S. Wright
Kevin S. Wright

Sworn to and subscribed before me this 25th day of June 2012

Jacqueline Shriver
Notary Public

My commission expires:
March 18, 2020

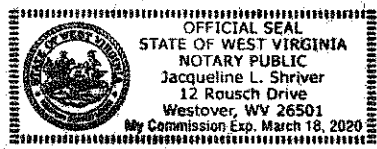

Permit No. 47-051-01398-P
Well No. M-1528