

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

MCELROY COAL COMPANY  
Coal Operator or Owner  
6126 ENERGY DRIVE MOUNDSVILLE, WV 26041  
Address

MCELROY COAL COMPANY  
Coal Operator or Owner  
6126 ENERGY DRIVE MOUNDSVILLE, WV 26041  
Address

JACK R HAMMERS AND PAUL F HAMMERS  
Lease or Property Owner  
165 OAKMONT ROAD WHEELING, WV 26003  
#3 SQUIRE VALLEY BARBOURSVILLE, WV 25504  
Address

MCELROY COAL COMPANY  
Name of Well Operator  
6126 ENERGY DRIVE MOUNDSVILLE, WV 26041  
Complete Address

CAMERON, WV 7.5'  
Well Location  
CAMERON  
District  
MARSHALL  
County  
M-1572  
Well No.  
HAMMERS, JACK R. & PAUL F.  
Farm

STATE INSPECTOR SUPERVISING PLUGGING

*Jessie J. Culbert*  
\_\_\_\_\_  
AFFIDAVIT

STATE OF WEST VIRGINIA,  
County of MONONGALIA ss:

MARK WILSON and KEVIN S. WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 11<sup>th</sup> day of November, 2013 and that the well was plugged in the following manner:

Sand or Zone Record	Filling Material	Casing/Tubing Size	Casing Pulled	Casing Left In
<b>Formation</b>				
Cleaned 9 7/8" hole from the surface to 902'. Reduced hole to 7 7/8". Cleaned 7 7/8" hole from 902' to 1331'. Tagged solid plug at 1331'. Left 150' of 10 3/4" casing in the hole from 172' to 322'. Cleaned 7 7/8" hole through the Pittsburgh Coal seam from 912' to 919'. Left 20' of 12" conductor casing in the hole from the surface to 20'.		12" Casing 10 3/4" Casing	0' 0'	20' 150'
<b>Cemented hole from 1331' to the surface as follows:</b> From 1331' to 1119' with Expandable Cement. From 1119' to 812' with 220 sacks of Thixotropic Cement with green dye. From 812' to the surface with Expandable Cement. A total of 440 sacks of Expandable Cement and 220 sacks of Thixotropic Cement were used to cement the hole from 1331' to surface. A total of 660 sacks of both cements were used to cement the hole from 1331' to the surface. Cement did circulate at the surface.				
<b>Coal Seams</b>		<b>Description of Monument</b>		
<u>Pittsburgh</u>	<u>(912' - 919')</u>	<u>77' of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to the cement plug at ground level.</u>		

RECEIVED  
Office of Oil & Gas  
JAN 16 2014  
WV Department of  
Environmental Protection

... and that the work of plugging and filling said well was completed on the 18<sup>th</sup> day of December, 2013


And further deponents saith not.

*Mark Wilson*  
\_\_\_\_\_  
Mark Wilson  
*Kevin S. Wright*  
\_\_\_\_\_  
Kevin S. Wright

Sworn to and subscribed before me this 6<sup>th</sup> day of Jan 2014

*Carol A. Mayhew*  
\_\_\_\_\_  
Notary Public

My commission expires: 9-12-2014

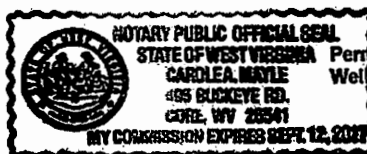

Permit No. 47-051-01444-P  
Well No. M-1572