

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL CO. - OHIO VALLEY OPERATIONS
Coal Operator or Owner
6126 ENERGY DRIVE MOUNDSVILLE, WV 26041
Address
CONSOLIDATION COAL CO. - OHIO VALLEY OPERATIONS
Coal Operator or Owner
6126 ENERGY DRIVE MOUNDSVILLE, WV26041
Address
MARK WEST ENERGY PARTNERS
Lease or Property Owner
601 TECHNOLOGY DRIVE CANONSBURG, PA 15317
Address

CONSOLIDATION COAL CO. - OHIO VALLEY OPERATIONS
Name of Well Operator
6126 ENERGY DRIVE MOUNDSVILLE, WV 26041
Complete Address
MAJORSVILLE, WV 7.5
Well Location
WEBSTER
District
MARSHALL
County
SGW-49A (MW #4)
Well No.
MARK WEST ENERGY PARTNERS
Farm

STATE INSPECTOR SUPERVISING PLUGGING U. C. /

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

MARK WILSON and KEVIN WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 27th day of December, 2011 and that the well was plugged in the following manner:

Sand or Zone Record	Filling Material	Plugs Used	Casing Pulled	Casing Left In
Formation		Size & Kind		
Cleaned 7 7/8" hole through 8 5/8" casing from the surface to 704'. Tagged plug at 704'. Run cement bond log on 8 5/8" casing. Bond log indicated that the 8 5/8" casing was cemented in from 686' to surface. Left 686' of 8 5/8" casing in the hole from 686' to surface. Cut remaining 8 5/8" casing at the following depths; 576', 454', 350', 250' and 78'. Left an unknown amount of 10 3/4" casing in the hole from the surface to an unknown depth. Perforate remaining 8 5/8" and 10 3/4" casings with 6 shots at each of the following depths; 460', 390', 290' and 190'. Cleaned 7 7/8" hole through the Pittsburgh Coal (285' - 291'). Left 20' of 16" conductor pipe in the hole from 20' to surface.	16" Conductor	0'	20'	
		10 3/4" Casing	0'	Unknown
		8 5/8" Casing	0'	686'
Cemented hole from 704' to surface as follows: From 704' to 585' with 60 sacks of Gas Blocker Cement. From 585' to surface with 225 sacks of Thixotropic Cement with green dye. A total of 285 sacks of cement were used to fill the hole from 704' to surface. Cement did circulate at the surface.				
Coal Seams	Description of Monument			
<u>PITTSBURGH</u>	285' to 291'	2'x2' flat plate with company name, well number permit number and date cemented stated on flat plate. The 2'X2' flat plate will be placed on the well three feet beneath the surface.		
(Name)				
(Name)				
(Name)				

... and that the work of plugging and filling said well was completed on the 10th day of January 2012


And further deponents saith not.

Mark Wilson
Mark Wilson

Sworn to and subscribed before me this 22nd day of March, 2012 Kevin S. Wright
Kevin S. Wright

Jacqueline L. Shriver
Notary Public

My commission expires:
March 18, 2020

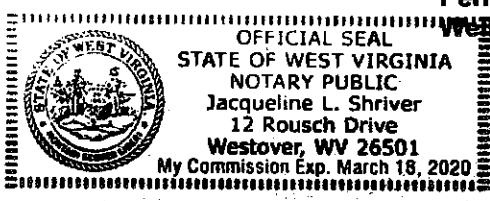

Permit No. 47-051-01544-P
Well No. SGW-49A
RECEIVED
Office of Oil & Gas
APR 20 2012
WV Department of Environmental Protection
05/04/2012