

west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax Earl Ray Tomblin, Governor Randy C. Huffman, Cabinet Secretary www.dep.wv.gov

November 29, 2012

WELL WORK PERMIT Horizontal 6A Well

This permit, API Well Number: 47-5101594, issued to GASTAR EXPLORATION USA, INC., is evidence of permission granted to perform the specified well work at the location described on the attached pages and located on the attached plat, subject to the provisions of Chapter 22 of the West Virginia Code of 1931, as amended, and all rules and regulations promulgated thereunder, and to all conditions and provisions outlined in the pages attached hereto. Notification shall be given by the operator to the Oil and Gas Inspector at least 24 hours prior to the construction of roads, locations, and/or pits for any permitted work. In addition, the well operator shall notify the same inspector 24 hours before any actual well work is commenced and prior to running and cementing casing. Spills or emergency discharges must be promptly reported by the operator to 1-800-642-3074 and to the Oil and Gas inspector.

Please be advised that form WR-35, well operators report of well work, is to be submitted to this office within 90 days of completion of drilling, as should form WR-34 Discharge Monitoring Report within 30 days of discharge of pits, if applicable. Failure to abide by all statutory and regulatory provisions governing all duties and operations hereunder may result in suspension or revocation of this permit and, in addition, may result in civil and/or criminal penalties being imposed upon the operators.

In addition to the applicable requirements of this permit, and the statutes and rules governing oil and gas activity in WV, this permit may contain specific conditions which must be followed. Permit conditions are attached to this cover letter.

Per 35CSR-4-5.2.g this permit will expire in two (2) years from the issue date unless permitted well work is commenced. If there are any questions, please feel free to contact pre at (304) 926-0499 ext. 1654.

James Martin

Chief

Operator's Well No: GOUDY NO.10H

Farm Name: PPG INDUSTRIES, INC.

API Well Number: 47-5101594

Permit Type: Horizontal 6A Well

Date Issued: 11/29/2012

Promoting a healthy environment.

PERMIT CONDITIONS

West Virginia Code § 22-6A-8(d) allows the Office of Oil and Gas to place specific conditions upon this permit. Permit conditions have the same effect as law. Failure to adhere to the specified permit conditions may result in enforcement action.

CONDITIONS

- 1. If the operator encounters an unanticipated void, or an anticipated void at an unanticipated depth, the operator shall notify the inspector within 24 hours. Modifications to the casing program may be necessary to comply with W. Va. Code § 22-6A-5a (12), which requires drilling to a minimum depth of thirty feet below the bottom of the void, and installing a minimum of twenty (20) feet of casing. Under no circumstance should the operator drill more than fifty (50) feet below the bottom of the void or install less than twenty (20) feet of casing below the bottom of the void.
- 2. When compacting fills, each lift before compaction shall not be more than 12 inches in height, and the fill material shall be within plus or minus 2% of the optimum moisture content as determined by the standard proctor density test, ASTM D698, Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort. Each lift must meet 95 % compaction of the optimum density based on results from the standard proctor density test of the actual soils used in specific engineered fill sites. Each lift shall be tested for compaction, with a minimum of two tests per lift per acre of fill. All test results shall be maintained on site and available for review.
- 3. Operator shall install signage per § 22-6A-8g (6) (B) at all source water locations included in their approved water management plan within 24 hours of water management plan activation.
- 4. Oil and gas water supply wells will be registered with the Office of Oil and Gas and all such wells will be constructed and plugged in accordance with the standards of the Bureau for Public Health set forth in its Legislative rule entitled *Water Well Regulations*, 64 C.S.R. 19. Operator is to contact the Bureau of Public Health regarding permit requirements. In lieu of plugging, the operator may transfer the well to the surface owner upon agreement of the parties. All drinking water wells within fifteen hundred feet of the water supply well shall be flow tested by the operator upon request of the drinking well owner prior to operating the water supply well.
- 5. Pursuant to the requirements pertaining to the sampling of domestic water supply wells/springs the operator shall, no later than thirty (30) days after receipt of analytical data provide a written copy to the Chief and any of the users who may have requested such analyses.

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS W.VA. CODE §22-6A - WELL WORK PERMIT APPLICATION

				051	03	509
1) Well Operator: Gastar	Exploration USA, Inc.		494487685	Marshall	Franklin	New Martinsville 7.5'
·			Operator ID	County	District	Quadrangle
2) Operator's Well Numb	er: Goudy No. 10h	1	\	Well Pad Nam	ne: Goudy	
3 Elevation, current grou	nd: <u>1253'</u>	Ele	vation, proposed	post-construc	etion:	1238'
4) Well Type: (a) Gas Other		Oil				
(b) If Gas:	Shallow Horizontal	D	Deep			
5) Existing Pad? Yes or N	lo: <u>No</u>					
6) Proposed Target Forma The Marcellus is the target formatic	- · · · · -	-			, ,	
7) Proposed Total Vertica 8) Formation at Total Ver 9) Proposed Total Measur 10) Approximate Fresh W 11) Method to Determine 12) Approximate Saltwate 13) Approximate Coal Se 14) Approximate Depth to 15) Does land contain coal 16) Describe proposed we and log data. Then plug the well be Run a bond log on part of the curve 17) Describe fracturing/st Gastar Exploration plans to fracture There will be approximately 20 stages	tical Depth: red Depth: Vater Strata Depth Fresh Water Depths: am Depths: Depths: Depths: Possible Void (all seams tributary) and vertical section, press imulating method the well using a typical slice	nth: 50° coal mine, lor adjacent through the Marnt (TBD). Drill the sure test casing and sin detail:	t to, active mine? cellus tagging less than chorizontal section to plann d set a master valve. Make	None No Twenty (20') feet fro led and proposed TD le a clean out run on t	om the top of the Or . Run casing and ce he casing and perfor	nondaga to get depths ment back to surface. ate then stimulate.
18) Total area to be distur	bed, including ro	ads, stockp	ile area, pits, etc,	(acres):		
19) Area to be disturbed f	or well pad only,	less access	road (acres):	5.33 acres	Iting the second second	VET -
			Dm4 9-14-12	Enviro	umental _E	rows

20)

CASING AND TUBING PROGRAM


ТҮРЕ	Size	New or Used	Grade	Weight per ft.	FOOTAGE: For Drilling	INTERVALS: Left in Well	CEMENT: Fill -up (Cu. Ft.)
Conductor	20"	New	PE			110' 🗸	Cement to Surface
Fresh Water	13 3/8"	New	H-40	48 #/ft		1150' 🗸	Cement to Surface
Coal		,					
Intermediate	9 5/8"	New	J-55	36 #/ft		2500' 🗸	Cement to Surface
Production	5 1/2"	New	P-110	20 #/ft		12739' 🖊	Cement to Surface
Tubing	2 3/8"	New	N-80	4.7 #/ft		6450'	
Liners							

DMH 9-14-12

ТҮРЕ	Size	Wellbore Diameter	Wall Thickness	Burst Pressure	Cement Type	Cement Yield
Conductor	20"	24"	.25"		Type I + 3% CaCl	∕ 1.2 cuft/sack
Fresh Water	13 3/8"	17"	.33"	1730 psi	See # 22	∕ 1.2 cuft/sack
Coal						
Intermediate	9 5/8"	12 1/4"	.352"	3520 psi	See # 22~	1.2 Cuft/sack
Production	5 1/2"	8 7/8" & 8 3/4"	.361"	12,640 psi	See #22	1.18 Cuft/sack
Tubing	2 3/8"		.19"	11,200 psi		
Liners						

PACKERS

Kind:	n/a		SECTIVE
Sizes:	n/a		
Depths Set:	n/a		: :•



at an equal distance apart. The Intermediate casing will have 7 Centralizers at 300 ' spacing. The production casing will have one centralizer every other joint in the lateral, one centralizer per the curve and one centralizer every other joint in the the vertical section 2) Describe all cement additives associated with each cement type. Type I + 2% CaCl2 + 1/4# Flake - Surface Cement mixed at 15.6 ppg CaCl2 (calcium chloride), Flake (cellophane flake) Type I + 1% CaCl2 + 1/4# Flake - Intermediate Cement mixed at 15.6 ppg 50:50 Class H .2%CD32 1.2%FL62 .1%ASA301 .4%SMS - Long String Lead mixed 14.5 ppg. - CD32 (cement dispersant), FL 62 (fluid loss), SMS (sodium metasilicate), ASA (minimizes free 50:50 TYPE 1 .4% R3 1%FL62 .15%ASA301 .3%CD32 - Long String Tail mixed at 14.5 ppg. -R3 (Retarder), FL62 (fluid loss), CD32 (cement dispersant), ASA (minimizes free fluid) 3) Proposed borchole conditioning procedures. Gastar will circulate the hole for 5 hours We will then pull out to the bottom of the curve and circulate for another 2 hours. Then come o	r ioint through
the curve and one centralizer every other joint in the the vertical section Describe all cement additives associated with each cement type. Type I + 2% CaCl2 + 1/4# Flake - Surface Cement mixed at 15.6 ppg CaCl2 (calcium chloride), Flake (cellophane flake) Type I + 1% CaCl2 + 1/4# Flake - Intermediate Cement mixed at 15.6 ppg 50:50 Class H .2%CD32 1.2%FL62 .1%ASA301 .4%SMS - Long String Lead mixed 14.5 ppg. - CD32 (cement dispersant), FL 62 (fluid loss), SMS (sodium metasilicate), ASA (minimizes free 50:50 TYPE 1 .4% R3 1%FL62 .15%ASA301 .3%CD32 - Long String Tail mixed at 14.5 ppg. -R3 (Retarder), FL62 (fluid loss), CD32 (cement dispersant), ASA (minimizes free fluid) Proposed borehole conditioning procedures. Gastar will circulate the hole for 5 hourses.	r Joint Inrouan
Describe all cement additives associated with each cement type. Type I + 2% CaCl2 + 1/4# Flake - Surface Cement mixed at 15.6 ppg CaCl2 (calcium chloride), Flake (cellophane flake) Type I + 1% CaCl2 + 1/4# Flake - Intermediate Cement mixed at 15.6 ppg 50:50 Class H .2%CD32 1.2%FL62 .1%ASA301 .4%SMS - Long String Lead mixed 14.5 ppg. - CD32 (cement dispersant), FL 62 (fluid loss), SMS (sodium metasilicate), ASA (minimizes free 50:50 TYPE 1 .4% R3 1%FL62 .15%ASA301 .3%CD32 - Long String Tail mixed at 14.5 ppg. -R3 (Retarder), FL62 (fluid loss), CD32 (cement dispersant), ASA (minimizes free fluid) Proposed borehole conditioning procedures. Gastar will circulate the hole for 5 hoursested.	,
Type I + 2% CaCl2 + 1/4# Flake - Surface Cement mixed at 15.6 ppg CaCl2 (calcium chloride), Flake (cellophane flake) Type I + 1% CaCl2 + 1/4# Flake - Intermediate Cement mixed at 15.6 ppg 50:50 Class H .2%CD32 1.2%FL62 .1%ASA301 .4%SMS - Long String Lead mixed 14.5 ppg. - CD32 (cement dispersant), FL 62 (fluid loss), SMS (sodium metasilicate), ASA (minimizes free 50:50 TYPE 1 .4% R3 1%FL62 .15%ASA301 .3%CD32 - Long String Tail mixed at 14.5 ppg. -R3 (Retarder), FL62 (fluid loss), CD32 (cement dispersant), ASA (minimizes free fluid)) Proposed borehole conditioning procedures. Gastar will circulate the hole for 5 hours	
Type I + 2% CaCl2 + 1/4# Flake - Surface Cement mixed at 15.6 ppg CaCl2 (calcium chloride), Flake (cellophane flake) Type I + 1% CaCl2 + 1/4# Flake - Intermediate Cement mixed at 15.6 ppg 50:50 Class H .2%CD32 1.2%FL62 .1%ASA301 .4%SMS - Long String Lead mixed 14.5 ppg. - CD32 (cement dispersant), FL 62 (fluid loss), SMS (sodium metasilicate), ASA (minimizes free 50:50 TYPE 1 .4% R3 1%FL62 .15%ASA301 .3%CD32 - Long String Tail mixed at 14.5 ppg. -R3 (Retarder), FL62 (fluid loss), CD32 (cement dispersant), ASA (minimizes free fluid) Proposed borehole conditioning procedures. Gastar will circulate the hole for 5 hours	
Type I + 2% CaCl2 + 1/4# Flake - Surface Cement mixed at 15.6 ppg CaCl2 (calcium chloride), Flake (cellophane flake) Type I + 1% CaCl2 + 1/4# Flake - Intermediate Cement mixed at 15.6 ppg 50:50 Class H .2%CD32 1.2%FL62 .1%ASA301 .4%SMS - Long String Lead mixed 14.5 ppg. - CD32 (cement dispersant), FL 62 (fluid loss), SMS (sodium metasilicate), ASA (minimizes free 50:50 TYPE 1 .4% R3 1%FL62 .15%ASA301 .3%CD32 - Long String Tail mixed at 14.5 ppg. -R3 (Retarder), FL62 (fluid loss), CD32 (cement dispersant), ASA (minimizes free fluid)) Proposed borehole conditioning procedures. Gastar will circulate the hole for 5 hours	
Type I + 2% CaCl2 + 1/4# Flake - Surface Cement mixed at 15.6 ppg CaCl2 (calcium chloride), Flake (cellophane flake) Type I + 1% CaCl2 + 1/4# Flake - Intermediate Cement mixed at 15.6 ppg 50:50 Class H .2%CD32 1.2%FL62 .1%ASA301 .4%SMS - Long String Lead mixed 14.5 ppg. - CD32 (cement dispersant), FL 62 (fluid loss), SMS (sodium metasilicate), ASA (minimizes free 50:50 TYPE 1 .4% R3 1%FL62 .15%ASA301 .3%CD32 - Long String Tail mixed at 14.5 ppg. -R3 (Retarder), FL62 (fluid loss), CD32 (cement dispersant), ASA (minimizes free fluid) Proposed borehole conditioning procedures. Gastar will circulate the hole for 5 hours	
Type I + 2% CaCl2 + 1/4# Flake - Surface Cement mixed at 15.6 ppg CaCl2 (calcium chloride), Flake (cellophane flake) Type I + 1% CaCl2 + 1/4# Flake - Intermediate Cement mixed at 15.6 ppg 50:50 Class H .2%CD32 1.2%FL62 .1%ASA301 .4%SMS - Long String Lead mixed 14.5 ppg. - CD32 (cement dispersant), FL 62 (fluid loss), SMS (sodium metasilicate), ASA (minimizes free 50:50 TYPE 1 .4% R3 1%FL62 .15%ASA301 .3%CD32 - Long String Tail mixed at 14.5 ppg. -R3 (Retarder), FL62 (fluid loss), CD32 (cement dispersant), ASA (minimizes free fluid)) Proposed borehole conditioning procedures. Gastar will circulate the hole for 5 hours	
Type I + 2% CaCl2 + 1/4# Flake - Surface Cement mixed at 15.6 ppg CaCl2 (calcium chloride), Flake (cellophane flake) Type I + 1% CaCl2 + 1/4# Flake - Intermediate Cement mixed at 15.6 ppg 50:50 Class H .2%CD32 1.2%FL62 .1%ASA301 .4%SMS - Long String Lead mixed 14.5 ppg. - CD32 (cement dispersant), FL 62 (fluid loss), SMS (sodium metasilicate), ASA (minimizes free 50:50 TYPE 1 .4% R3 1%FL62 .15%ASA301 .3%CD32 - Long String Tail mixed at 14.5 ppg. -R3 (Retarder), FL62 (fluid loss), CD32 (cement dispersant), ASA (minimizes free fluid) Proposed borehole conditioning procedures. Gastar will circulate the hole for 5 hours	
Type I + 2% CaCl2 + 1/4# Flake - Surface Cement mixed at 15.6 ppg CaCl2 (calcium chloride), Flake (cellophane flake) Type I + 1% CaCl2 + 1/4# Flake - Intermediate Cement mixed at 15.6 ppg 50:50 Class H .2%CD32 1.2%FL62 .1%ASA301 .4%SMS - Long String Lead mixed 14.5 ppg. - CD32 (cement dispersant), FL 62 (fluid loss), SMS (sodium metasilicate), ASA (minimizes free 50:50 TYPE 1 .4% R3 1%FL62 .15%ASA301 .3%CD32 - Long String Tail mixed at 14.5 ppg. -R3 (Retarder), FL62 (fluid loss), CD32 (cement dispersant), ASA (minimizes free fluid)) Proposed borehole conditioning procedures. Gastar will circulate the hole for 5 hours	
CaCl2 (calcium chloride), Flake (cellophane flake) Type I + 1% CaCl2 + 1/4# Flake - Intermediate Cement mixed at 15.6 ppg 50:50 Class H .2%CD32 1.2%FL62 .1%ASA301 .4%SMS - Long String Lead mixed 14.5 ppg CD32 (cement dispersant), FL 62 (fluid loss), SMS (sodium metasilicate), ASA (minimizes free 50:50 TYPE 1 .4% R3 1%FL62 .15%ASA301 .3%CD32 - Long String Tail mixed at 14.5 ppgR3 (Retarder), FL62 (fluid loss), CD32 (cement dispersant), ASA (minimizes free fluid) Proposed borehole conditioning procedures. Gastar will circulate the hole for 5 hours	
Type I + 1% CaCl2 + 1/4# Flake - Intermediate Cement mixed at 15.6 ppg 50:50 Class H .2%CD32 1.2%FL62 .1%ASA301 .4%SMS - Long String Lead mixed 14.5 ppg. - CD32 (cement dispersant), FL 62 (fluid loss), SMS (sodium metasilicate), ASA (minimizes free 50:50 TYPE 1 .4% R3 1%FL62 .15%ASA301 .3%CD32 - Long String Tail mixed at 14.5 ppg. -R3 (Retarder), FL62 (fluid loss), CD32 (cement dispersant), ASA (minimizes free fluid)) Proposed borehole conditioning procedures. Gastar will circulate the hole for 5 hours	
50:50 Class H .2%CD32 1.2%FL62 .1%ASA301 .4%SMS - Long String Lead mixed 14.5 ppg CD32 (cement dispersant), FL 62 (fluid loss), SMS (sodium metasilicate), ASA (minimizes free 50:50 TYPE 1 .4% R3 1%FL62 .15%ASA301 .3%CD32 - Long String Tail mixed at 14.5 ppgR3 (Retarder), FL62 (fluid loss), CD32 (cement dispersant), ASA (minimizes free fluid)) Proposed borehole conditioning procedures. Gastar will circulate the hole for 5 hours	
- CD32 (cement dispersant), FL 62 (fluid loss), SMS (sodium metasilicate), ASA (minimizes free 50:50 TYPE 1 .4% R3 1%FL62 .15%ASA301 .3%CD32 - Long String Tail mixed at 14.5 ppgR3 (Retarder), FL62 (fluid loss), CD32 (cement dispersant), ASA (minimizes free fluid)) Proposed borehole conditioning procedures. Gastar will circulate the hole for 5 hours	
50:50 TYPE 1 .4% R3 1%FL62 .15%ASA301 .3%CD32 - Long String Tail mixed at 14.5 ppgR3 (Retarder), FL62 (fluid loss), CD32 (cement dispersant), ASA (minimizes free fluid) Proposed borehole conditioning procedures. Gastar will circulate the hole for 5 hours	fluid)
-R3 (Retarder), FL62 (fluid loss), CD32 (cement dispersant), ASA (minimizes free fluid) Proposed borehole conditioning procedures. Gastar will circulate the hole for 5 hours	naid)
Proposed borehole conditioning procedures. Gastar will circulate the hole for 5 hours.	
· · · · · · · · · · · · · · · · · · ·	
· · · · · · · · · · · · · · · · · · ·	
· • • • • • • • • • • • • • • • • • • •	upon TD.

Dm H 9-14-12

Environmental Protection



September 6, 2012

Mr. James Martin, Chief Office of Oil & Gas 601 57th Street, SE Charleston, WV 25304

Subject: Goudy 10H, Marshall County, WV

Dear Mr. Martin:

We are writing this letter pursuant to our conversation with Gene Smith and Laura Adkins on November 29, 2011 in order to change our casing program to a better design. Gastar is looking to set the conductor casing to 110' which is 60' below where we have found the fresh water strata to be. We have found this depth to be 40'-50' with only enough traceable water to make the hole damp. In doing this, we will be grouting the cement back to surface in order to set the conductor casing. The rest of our casing design is set to be the same with our surface casing being set to cover both the Pittsburgh and Sewickley Coal Seams at approximately 1100'. The intermediate casing is planned to set to 2500' to cover potential shallow zones. The producing string will then be set to TD.

1)M17 9-14-12

If you have any questions or need additional information, please feel free to contact me at 304-629-2375.

Sincerley,

Tom Rowan

Petroleum Engineer

Office of Oil & Gas

SEP 2 1 2012

Gastar Exploration LTD.

229 West Main Street, Suite 301 • Clarksburg, WV 26301 VVV De artment of Phone: (304) 622-4796 • Fax: (304) 622-4824 Environmental Protection



SASTAR EXPLORATION USA, INC. Location: Marshall County, WV Field: Marshall Facility: Goudy Wellbore: Goudy 10H (PWR) Wellbore: Goudy 10H (PWR)

			Tru	ie Vertical De	epth (ft)		Scale 1 inch = 15		Rig	Me	Rio S	П	T						0	
	9.00 7/100/1	5250	4500	3750 -	3000 T	2250		750	Rig on Slot #10 (RT) to Mean Sea Level	Mean Sea Level to Mud line (At Slot: Slot #10)	Slot #10 3.70 -19.71 16 Rig on Slot #10 (RT) to Mud line (At Slot: Slot #10)	ь	Facility Name		End of Tangent	End of Tangent	End of Build	Tie On	Design Comment	
750		3.00*100ft End of Build : 13.00*fnc; 5433.33ft MD, 5429.62ft TVD, 7.99ft VS Find of Tangent : 13.00*fnc; 5810.33ft MD, 5796.96ft TVD, 21.85ft VS	End of Tangent: 0.00° Inc, 5000.00tt MD, 5000.00tt TVD, 0.00tt VS						o Mean Sea Le	ud line (At Slot:	to Mud line (At Slot	-	Name		12739.40	5810.33	5433.33	0.00	MD (ft)	
	3D Arc : 90.	.00° lnc, 54;	0.00° lnc, 5						vel	Slot #10)	71 Slot: Slot #	+			90.004	13.000	13.000	0.000	Inc (°)	
15000 A	00° lnc, 6792.80	33.33ft MD, 5428	000.00ft MD, 50							101	1688540.400	Grid East (US ft)	Grid East (US ft)	Locati	327.952	_	245.000	_	Az (%)	Well F
2250 \ \zimuth 32	ft MD, 6400.	9.62ft TVD, 7	00.00H TVD									$^{+}$	+	on Info	6400.00	5796.96	5429.62	0.00	TVD (ft)	Facility: Go
J 3000 3750 Vertical Section (ft) 25.60° with reference 0.00	End of 3D Arc : 90.00° Inc, 6792.801 MD, 6400.371 TVD, 663.401 VS	7.99ft VS D. 21 85ft VS	, 0.0011 VS								14430946.700	Grid North (US ft)	Grid North (US ft)	Location Information	5449.88	-56.53	-20.69	0.00	Local N (ft)	/: Goudy e Data
V, 0.0	VS								123811	-1238ft	39°44'12.548"N	Latitude	Latitude		-3731.59	-121.22	-44.36	0.00	Local E (ft)	×
4500 0 E											48"N	6	0		0.00	0.00	3.00	0.00	DLS (%100ft)	
5250											80°49'43.738"W	Longitude	Longitude				0 0	0	100ft)	
6000	End of Tar										738"W	ide :	de		6604.99	21.85	7.99		VS (ft)	
6750 Scale 1 Inch = 1500 tt	End of Tangent : 90.00° lnc, 12739.40ft MD, 6400.00ft TVD, 6604.99ft VS																GOLDY TOH PBHL Rev-	Goudy 10H LP Rov-	Name	We
	40ft MD, 6400.00												\	\	ı	Scale 1 inch	12739,40 64	_	MD (II) TV	Wellbore:
	ft TVD, 6604.99											/	/	+ End	\	-3750	6400,00 5449,88	\top	TVD (ft) Local N (ft)	Goudy 10H
	ft VS			End of					/	/	/	_	/	End of Tangent: 6400.	_	-3000	-3/31.59	+	Local E (II	
For example:			End of Tangen End of End o	3D Arc : 6400.37tt							/			nt : 6400,00ft TVD, 5449,88ft N, 3731,59ft W	+	East -2250	1684810.30	1688415,10	Grid East (US ft)	(PWB) Targets
BGGM (1945.0 to 2013.0) Dpc 67.36* Faeld: 52727 iff. Magnetic North is 6.35 degrees West of Troe North (at 244.04/2012) Gdd North is 0.11 degrees East of Troe North (at 244.04/2012) To correct azimuth from True is Grid sabtrated 1.11 degrees To correct azimuth from Magnetic to Grid sabtrated 1.54 degrees For example: If the Magnetic North Azimuth = 90 degs, then the Grid North Azimuth = 90 - 8.64 = 81.36 For example: If the Magnetic North Azimuth = 90 degs, then the Grid North Azimuth = 90 - 8.64 = 81.36	₩ .	ı	End of Tangent, \$796,961 TVD, 56,5516 \$,121,221W ** End of Blad; \$459,628T VD, 50,0618 \$4,4361W End of Tangent; \$5000,001 TVD, 0,001 N, 0,001E End of Tangent; \$000:-0,001 TVD, 0,001 N, 0,001E	End of 3D Art: 6480.37# TVD, 409.53# N, 576.12# W										ft N. 3731.59ft W		Easting (ft) -750	14436394,40	14430872.00	t) Grid North (US ti)	
3.0) Dip: 67.36° Field: 1 es West of True North (degrees East of True N True to Grid subtract 0.1 gretic to Grid subtract 0.1 gretic to Grid subtract 1 0 degs, then the Grid N		GRO Z	1.22ft W 3.44,36ft W 3ft N, 0.00ft E .00ft N, 0.00ft E	Slot #10											O	Pic	30 4500.475 N	18-14-11.81-N	Labrude	WE
52727 nT (214/Jul/2012) (arth 11 degrees 8.64 degrees borth Azimuth = 90 - 8				750	1500	2250	3000	3750			4500		5250		_	750	80-50-31-362-W	80*49'45.345'W	Longitude	20
64 = 81.36						(刊)	gnidhoN						E	n۷	vv viro	V I	m	er	al Ita	tin il P

API No. 47 - 051	- 01294	
Operator's Well No.	Goudy No.10H	

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS


CONSTRUCTION AND RECLAMATION PLAN AND SITE REGISTRATION APPLICATION FORM GENERAL PERMIT FOR OIL AND GAS PIT WASTE DISCHARGE

Operator Name_Gastar Exploration USA, Inc	D	OP Code 494487685	
Watershed_Tributary of the Ohio River	Quadrangle	New Martinsville 7.5'	
Elevation 1238'	County_Marshall	District_Franklin	
Description of anticipated Pit Waste:	arious formation cuttings		
		d well work? Yes X No	
Will a synthetic liner be used in the pit?	Yes If so, what mil.?	'se 60 ckc	
Proposed Disposal Method For Treated Land Applica	Pit Wastes: tion		
	Injection (UIC Permit Number 3416	729685	
Reuse (at AF)	
-	osal (Supply form WW-9 for disposal	location)	
Other (Expla			
Drilling medium anticipated for this wel	1? Air, freshwater, oil based, etc. Air fo	or vertical / oil for horizontal	
-If oil based, what type? Synth	etic, petroleum, etc. Synthetic oil based		
Additives to be used? Barite for weight			
Will closed loop system be used ? Yes, f	or everything drilled with synthetic oil base	Irill outlines will be disposed of in Maadowfill Landfill (Permitt SWE-1032)	
If left in pit and plan to solidif	n pit, landfill, removed offsite, etc.	Ime	
-Landfill or offsite name/permi	t number? Wetzel County Landfill SWF-1021/WV0109185, Northwestern I	lime,	12
•			
on August 1, 2005, by the Office of Oil provisions of the permit are enforceable or regulation can lead to enforcement active application form and all attachments the	and Gas of the West Virginia Department by law. Violations of any term or constion. If that I have personally examined and ereto and that, based on my inquiry of the armation is true, accurate, and complete	the GENERAL WATER POLLUTION PERMIT issued ment of Environmental Protection. I understand that the idition of the general permit and/or other applicable law d am familiar with the information submitted on this those individuals immediately responsible for obtaining te. I am aware that there are significant penalties for	
Company Official Signature	1:00 mico		
		RECEIVED	
Company Official (Typed Name) Michael	el McCown	Office of Cir. & Gas	
Company Official Title Vice President		255	
		SEP 2 1 2012	
		Vivin The service of	
Subscribed and sworn before me this	5th day of September	20 12	
11.17	1.	Environmental Protoction	
Shul h.	Ohl	Notary Public	
My commission expires 06/11/2020		~~~~~	
My commission expires 65.1.12225		OFFICIAL SEAL	
		Notary Public. State of West Virginia DAVID W. PERKINSON	
		377 Eastview Drive Parkersburg, WV 26104 My commission expires June 11, 2020	
		my commission expires dune 11, 2020	



Field Reviewed?

Property Boundary A Diversion _______ Road Spring **Existing Fence** Wet Spot Drain Pipe Planned Fence w/ size in inches Stream Waterway Open Ditch Cross Drain Rock North Pit: Cut Walls Buildings Pit: Compacted Fill Walls Water Wells Area for Land Application of Pit Waste **Drill Sites** 9.64 Proposed Revegetation Treatment: Acres Disturbed Prevegetation pH _ 6.5 Tons/acre or to correct to pH ____ Lime Fertilizer (10-20-20 or equivalent) 1/3 ton lbs/acre (500 lbs minimum) 2 Tons/acre Mulch Seed Mixtures Area II Area I Seed Type lbs/acre Seed Type lbs/acre 15 40 **Orchard Grass** Meadow Mix 5 5 Alsike Clover Alsike Clover 15 Annual Rye Attach: Drawing(s) of road, location, pit and proposed area for land application. Photocopied section of involved 7.5' topographic sheet. Plan Approved by: Comments: Oil + Gr Inpector Date: 9-14-12

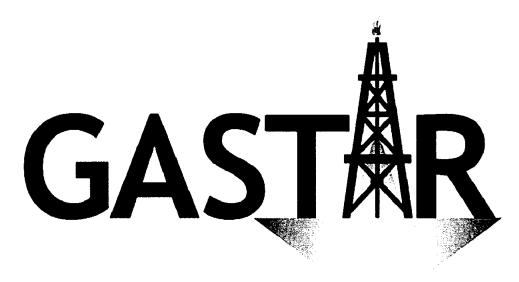




8/22/2012

GASTAR EXPLORATION USA

GOUDY WELL No. 10H

DMH 9-14-12

WELL SITE SAFETY PLAN

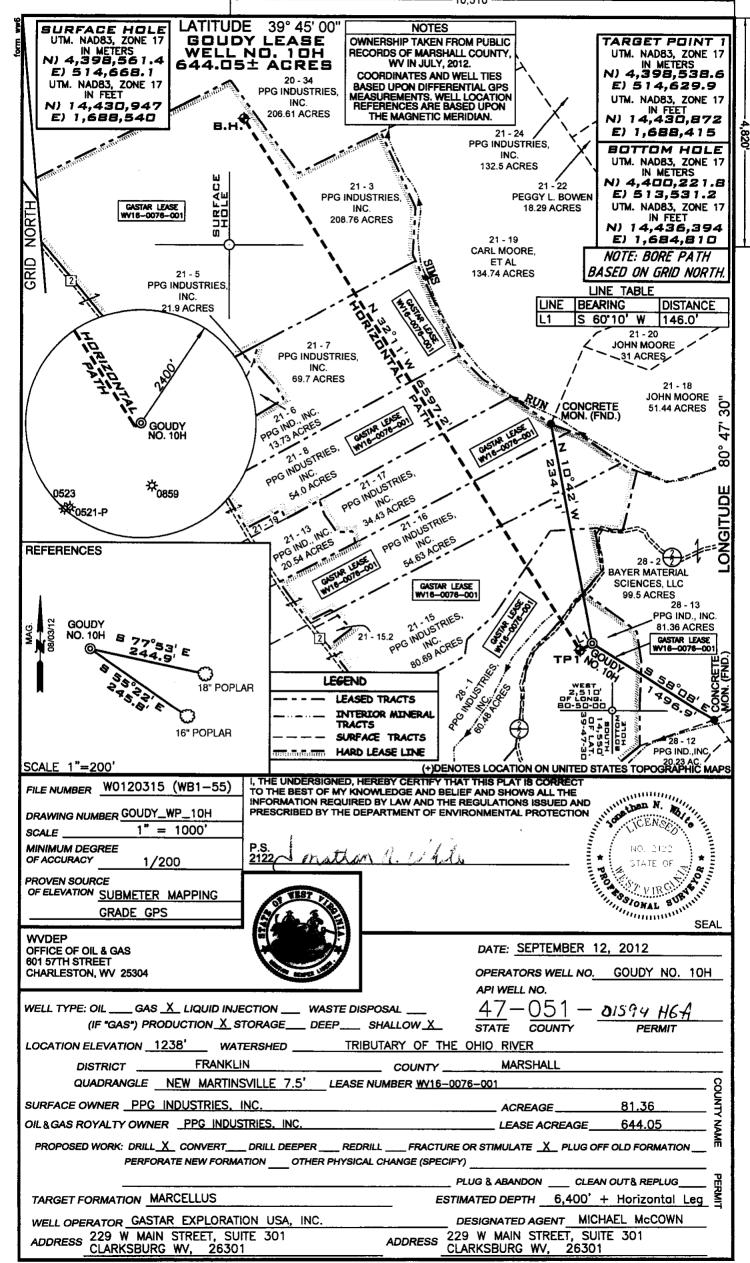

Date of Notice Certification: 09/20/2012

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS NOTICE CERTIFICATION

API No. 47- 051

Notice has been given: Pursuant to the provisions in West Virginia Code § 22-6A, the Operator has provided the required parties with below for the tract of land as follows: State: West Virginia UTM NAD 83 Easting: Northing: 4,398,561.4 Meters District: Franklin Public Road Access: County Route 2/2 Quadrangle: New Martinsville 7.5' Generally used farm name: PG Industries, Inc. Watershed: Tributary of the Ohio River Pursuant to West Virginia Code § 22-6A-7(b), every permit application filed under this section shall be prescribed by the secretary, shall be verified and shall contain the following information: (14) A certification filed.	e on a form as may be
Pursuant to the provisions in West Virginia Code § 22-6A, the Operator has provided the required parties with below for the tract of land as follows: State: West Virginia UTM NAD 83 Easting: Northing: 4,398,561.4 Meters District: Franklin Public Road Access: County Route 2/2 Quadrangle: New Martinsville 7.5' Generally used farm name: PPG Industries, Inc. Watershed: Tributary of the Ohio River	e on a form as may be
State: West Virginia UTM NAD 83 Easting: Northing: 4,398,561.4 Meters District: Franklin Public Road Access: County Route 2/2 Quadrangle: New Martinsville 7.5' Generally used farm name: PPG Industries, Inc. Pursuant to West Virginia Code § 22-6A-7(b), every permit application filed under this section shall be	from the operator that (i)
County: Marshall VIVI NAD 83 Northing: 4,398,561.4 Meters District: Franklin Public Road Access: County Route 2/2 Quadrangle: New Martinsville 7.5' Generally used farm name: PPG Industries, Inc. Watershed: Tributary of the Ohio River Pursuant to West Virginia Code § 22-6A-7(b), every permit application filed under this section shall be	from the operator that (i)
District: Franklin Public Road Access: County Route 2/2 Quadrangle: New Martinsville 7.5' Generally used farm name: PPG Industries, Inc. Pursuant to West Virginia Code § 22-6A-7(b), every permit application filed under this section shall be	from the operator that (i)
Watershed: Tributary of the Ohio River Pursuant to West Virginia Code § 22-6A-7(b), every permit application filed under this section shall be	from the operator that (i)
Watershed: Tributary of the Ohio River Pursuant to West Virginia Code § 22-6A-7(b), every permit application filed under this section shall be	from the operator that (i)
Pursuant to West Virginia Code § 22-6A-7(b), every permit application filed under this section shall be prescribed by the secretary, shall be verified and shall contain the following information: (14) A certification of	from the operator that (i)
it has provided the owners of the surface described in subdivisions (1), (2) and (4), subsection (b), section information required by subsections (b) and (c), section sixteen of this article; (ii) that the requirement was dee of giving the surface owner notice of entry to survey pursuant to subsection (a), section ten of this article requirements of subsection (b), section sixteen of this article were waived in writing by the surface owner Virginia Code § 22-6A-11(b), the applicant shall tender proof of and certify to the secretary that the notice requirements of subsection (b), section sixteen of this article have been completed by the applicant.	emed satisfied as a result six-a; or (iii) the notice or; and Pursuant to West
Pursuant to West Virginia Code § 22-6A, the Operator has attached proof to this Notice Certification that the Operator has properly served the required parties with the following:	
*PLEASE CHECK ALL THAT APPLY	OOG OFFICE USE ONLY
1. NOTICE OF SEISMIC ACTIVITY or NOTICE NOT REQUIRED BECAUSE NO SEISMIC ACTIVITY WAS CONDUCTED	RECEIVED/ NOT REQUIRED
■ 2. NOTICE OF ENTRY FOR PLAT SURVEY or □ NO PLAT SURVEY WAS CONDUCTED	RECEIVED
☐ 3. NOTICE OF INTENT TO DRILL or NOTICE NOT REQUIRED BECAUSE NOTICE OF ENTRY FOR PLAT SURVEY WAS CONDUCTED or	RECEIVED/ NOT REQUIRED
☐ WRITTEN WAIVER BY SURFACE OWNER (PLEASE ATTACH)	
■ 4. NOTICE OF PLANNED OPERATION	RECEIVED
■ 5. PUBLIC NOTICE	RECEIVED
■ 6. NOTICE OF APPLICATION	RECEIVED

Required Attachments:

The Operator shall attach to this Notice Certification Form all Notice Forms and Certifications of Notice that have been provided to the required parties and/or any associated written waivers. For the Public Notice, the operator shall attach a copy of the Class II Legal Advertisement with publication date verification or the associated Affidavit of Publication. The attached Notice Forms and Certifications of Notice shall serve as proof that the required parties have been noticed as required under West Virginia Code § 22-6A. Pursuant to West Virginia Code § 22-6A-11(b), the Certification of Notice to the person may be made by affidavit of personal service, the return receipt card or other postal receipt for certified mailing.



Certification of Notice is hereby given:


THEREFORE, I Michael McCown , have read and understand the notice requirements within West Virginia Code § 22-6A. I certify that as required under West Virginia Code § 22-6A, I have served the attached copies of the Notice Forms, identified above, to the required parties through personal service, by registered mail or by any method of delivery that requires a receipt or signature confirmation. I certify under penalty of law that I have personally examined and am familiar with the information submitted in this Notice Certification and all attachments, and that based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the information is true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment.

 Well Operator:
 Gastar Exploration USA, Inc.
 Address:
 229 West Main St., Suite 301

 By:
 Michael McCown
 Clarksburg, WV 26301

 Its:
 Vice President
 Facsimile:
 304-622-4824

 Telephone:
 304-622-4796
 Email:
 dperkinson@gastar.com

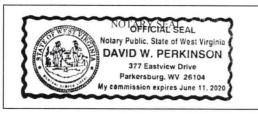

Subscribed and sworn before me this 20th day of September, 2012

Notary Public

My Commission Expires 06/11/2020

Oil and Gas Privacy Notice:

The Office of Oil and Gas processes your personal information, such as name, address and telephone number, as part of our regulatory duties. Your personal information may be disclosed to other State agencies or third parties in the normal course of business or as needed to comply with statutory or regulatory requirements, including Freedom of Information Act requests. Our office will appropriately secure your personal information. If you have any questions about our use or your personal information, please contact DEP's Chief Privacy Officer at deprivacyofficer@wv.gov.



WW-6A (5-12)

API NO. 47	51.	0_	1590	1
OPERATOR	WELL	NO.	10H	,
Well Pad Nan	ne: Go	udy		

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS NOTICE OF APPLICATION

	ice Time Requirement: notice shall be provided no later the of Notice: 09/13/2012 Date Permit Application Filed: 09/13/2012	
Noti	ice of:	
•	PERMIT FOR ANY WELL WORK CONSTRUCTION OF	PPROVAL FOR THE AN IMPOUNDMENT OR PIT
Deli	very method pursuant to West Virginia Code § 22-6A-	10(b)
		HOD OF DELIVERY THAT REQUIRES A EIPT OR SIGNATURE CONFIRMATION
eros own tract road seve locar oil a enlar Any with dom (c)(1) the l mair cont:	ion and sediment control plan required by section seven of ers of record of the surface of the tract on which the well is or tracts overlying the oil and gas leasehold being develops or other land disturbance as described in the erosion and n of this article; (3) The coal owner, operator or lessee, in the ted [sic] is known to be underlain by one or more coal sear and gas leasehold being developed by the proposed well work gement, alteration, repair, removal or abandonment of any surface owner or water purveyor who is known to the application one thousand five hundred feet of the center of the well estic animals; and (6) The operator of any natural gas storal) If more than three tenants in common or other co-owners ands, the applicant may serve the documents required upor	a receipt or signature confirmation, copies of the application, the this article, and the well plat to each of the following persons: (1) The sor is proposed to be located; (2) The owners of record of the surface bed by the proposed well work, if the surface tract is to be used for sediment control plan submitted pursuant to subsection (c), section the event the tract of land on which the well proposed to be drilled is as; (4) The owners of record of the surface tract or tracts overlying the rk, if the surface tract is to be used for the placement, construction, impoundment or pit as described in section nine of this article; (5) licant to have a water well, spring or water supply source located pad which is used to provide water for consumption by humans or use field within which the proposed well work activity is to take place. So of interests described in subsection (b) of this section hold interests in the person described in the records of the sheriff required to be not a of this code. (2) Notwithstanding any provision of this article to the aless the lien holder is the landowner.
	ress: P.O. Box 191	Name: Appalachian Power Company Address: 1 Riverside Plaza
	New Martinsville, WV 26155	Columbus, OH 43215
Nam Add:	ress:	COAL OPERATOR Name:
	SURFACE OWNER(s) (Road and/or Other Disturbance)	Address:
	e: Bayer Materialscience, LLC	□ WATER PURVEYOR(s)
Add	ress: 100 Bayer Road Pittsburgh, PA 15205	☐ WATER PURVEYOR(s)"
Nam	e:	Name:Address:
Add	ress:	Audicos.
Nam	SURFACE OWNER(s) (Impoundments/Pits) ne: ress:	OPERATOR OF ANY NATURAL GAS STORAGE FIELD Name: Address:
		*Please attach additional forms if necessary

W	W-6A
(5	-12)

API NO. 47- <u>5</u>	1-01594
OPERATOR WE	
Well Pad Name:	Goudy

Notice is hereby given:

Pursuant to West Virginia Code § 22-6A-10(b), notice is hereby given that the undersigned well operator has applied for a permit for well work or for a certificate of approval for the construction of an impoundment or pit.

This Notice Shall Include:

Pursuant to W. Va. Code § 22-6A-10(b), this notice shall include: (1) copies of the application; (2) the erosion and sediment control plan required by section seven of this article; and (3) the well plat.

Pursuant to W. Va. Code § 22-6A-10(f), this notice shall also include: (1) a statement of the time limits for filing written comments; (2) who may file written comments; (3)the name and address of the secretary for the purpose of filing the comments and obtaining additional information; and (4) a statement that the persons may request, at the time of submitting written comments, notice of the permit decision and a list of persons qualified to test water.

Additional information related to horizontal drilling may be obtained from the Secretary, at the WV Department of Environmental Protection headquarters, located at 601 57th Street, SE, Charleston, WV 25304 (304-926-0450) or by visiting www.dep.wv.gov/oil-and-gas/pages/default.aspx.

Water Well Testing:

Pursuant to West Virginia Code § 22-6A-10(d), notification shall be made, with respect to surface landowners identified in subsection (b) or water purveyors identified in subdivision (5), subsection (b) of this section, of the opportunity for testing their water well.

Water Testing Laboratories:

Pursuant to West Virginia Code § 22-6A-10(i), persons entitled to notice pursuant to subsection (b) of this section may contact the department to ascertain the names and locations of water testing laboratories in the subject area capable and qualified to test water supplies in accordance with standard accepted methods. In compiling that list of names the department shall consult with the state Bureau for Public Health and local health departments.

Well Location Restrictions

Pursuant to W. Va. Code § 22-6A-12, Wells may not be drilled within two hundred fifty feet measured horizontally from any existing water well or developed spring used for human or domestic animal consumption. The center of well pads may not be located within six hundred twenty-five feet of an occupied dwelling structure, or a building two thousand five hundred square feet or larger used to house or shelter dairy cattle or poultry husbandry. This limitation is applicable to those wells, developed springs, dwellings or agricultural buildings that existed on the date a notice to the surface owner of planned entry for surveying or staking as provided in section ten of this article or a notice of intent to drill a horizontal well as provided in subsection (b), section sixteen of this article was provided, whichever occurs first, and to any dwelling under construction prior to that date. This limitation may be waived by written consent of the surface owner transmitted to the department and recorded in the real property records maintained by the clerk of the county commission for the county in which such property is located. Furthermore, the well operator may be granted a variance by the secretary from these distance restrictions upon submission of a plan which identifies the sufficient measures, facilities or practices to be employed during well site construction, drilling and operations. The variance, if granted, shall include terms and conditions the department requires to ensure the safety and protection of affected persons and property. The terms and conditions may include insurance, bonding and indemnification, as well as technical requirements. (b) No well pad may be prepared or well drilled within one hundred feet measured horizontally from any perennial stream, natural or artificial lake, pond or reservoir, or a wetland, or within three hundred feet of a naturally reproducing trout stream. No wellpad may be located within one thousand feet of a surface or ground water intake of a public water supply. The distance from the public water supply as identified by the department shall be measured as follows: (1) For a surface water intake on a lake or reservoir, the distance shall be measured from the boundary of the lake or reservoir. (2) For a surface water intake on a flowing stream, the distance shall be measured from a semicircular radius extending upstream of the surface water intake. (3) For a groundwater source, the distance shall be measured from the wellhead or spring. The department may, in its discretion, waive these distance restrictions upon submission of a plan identifying sufficient measures, facilities or practices to be employed during well site construction, drilling and operations to protect the waters of the state. A waiver, if granted, shall impose any permit conditions as the secretary considers necessary. (c) Notwithstanding the foregoing provisions of this section, nothing contained in this section prevents an operator from conducting the activities permitted or authorized by a Clean Water Act Section 404 permit or other approval from the United States Army Corps of Engineers within any waters of the state or within the restricted areas referenced in this section. (d) The well location restrictions section in this section shall not apply to any well on a multiple well pad if at least one of the wells was permitted prior to the effective date of this article. (e) The secretary shall, by December 31, 2012, report to the Legislature on the noise, light, dust and volatile organic compounds generated by the drilling of horizontal wells as they relate to the well location restrictions regarding occupied dwelling structures pursuant to this section. Upon a finding, if any, by the secretary that the well location restrictions regarding occupied dwelling structures are inadequate or otherwise require alteration to address the items examined in the study required by this subsection, the secretary shall have the authority to propose for promulgation legislative rules establishing guidelines and procedures regarding reasonable levels of noise, light, dust and volatile organic compounds relating to drilling horizontal wells, including reasonable means of truitigating such

WW-6A (5-12)

factors, if necessary.

API NO. 47- 5 (- 01594
OPERATOR WE	LL NO. 10H
Well Pad Name:	Goudy

Written Comment:

Pursuant to West Virginia Code § 22-6A-11(a), all persons described in subsection (b), section ten of this article may file written comments with the secretary as to the location or construction of the applicant's proposed well work within thirty days after the application is filed with the secretary. All persons described in West Virginia Code § 22-6A-10(b) may file written comments as to the location or construction of the applicant's proposed well work to the Secretary at:

Chief, Office of Oil and Gas Department of Environmental Protection 601 57th St. SE Charleston, WV 25304 (304) 926-0450

Such persons may request, at the time of submitting written comments, notice of the permit decision and a list of persons qualified to test water. NOTE: YOU ARE NOT REQUIRED TO FILE ANY COMMENT.

Time Limits and Methods for Filing Comments.

The law requires these materials to be served on or before the date the operator files its Application. You have **THIRTY (30) DAYS** after the filing date to file your comments. Comments must be filed in person or received in the mail by the Chief's office by the time stated above. You may call the Chief's office to be sure of the date. Check with your postmaster to ensure adequate delivery time or to arrange special expedited handling. If you have been contacted by the well operator and you have signed a "voluntary statement of no objection" to the planned work described in these materials, then the permit may be issued at any time.

Pursuant to West Virginia Code § 22-6A-11(c)(2), Any objections of the affected coal operators and coal seam owners and lessees shall be addressed through the processes and procedures that exist under sections fifteen, seventeen and forty, article six of this chapter, as applicable and as incorporated into this article by section five of this article. The written comments filed by the parties entitled to notice under subdivisions (1), (2), (4), (5) and (6), subsection (b), section ten of this article shall be considered by the secretary in the permit issuance process, but the parties are not entitled to participate in the processes and proceedings that exist under sections fifteen, seventeen or forty, article six of this chapter, as applicable and as incorporated into this article by section five of this article.

Comment Requirements

Your comments must be in writing and include your name, address and telephone number, the well operator's name and well number and the approximate location of the proposed well site including district and county from the application. You may add other documents, such as sketches, maps or photographs to support your comments.

Disclaimer: All comments received will be placed on our web site http://www.dep.wv.gov/oil-and-gas/Horizontal-Permits/Pages/default.aspx and the applicant will automatically be forwarded an email notice that such comments have been submitted. The applicant will be expected to provide a response to comments submitted by any surface owner, water purveyor or natural gas storage operator noticed within the application.

Permit Denial or Condition

The Chief has the power to deny or condition a well work permit. Pursuant to West Virginia Code § 22-6A-8(d), the permit may not be issued or be conditioned, including conditions with respect to the location of the well and access roads prior to issuance if the director determines that:

- (1) The proposed well work will constitute a hazard to the safety of persons;
- (2) The plan for soil erosion and sediment control is not adequate or effective;
- (3) Damage would occur to publicly owned lands or resources; or
- (4) The proposed well work fails to protect fresh water sources or supplies.

Other

A permit may also be denied under West Virginia Code § 22-6A-7(k), the secretary shall deny the issuance of a permit if the secretary determines that the applicant has committed a substantial violation of a previously issued permit for a horizontal well, including the applicable erosion and sediment control plan associated with the previously issued permit, or a substantial violation of one or more of the rules promulgated under this article, and in each instance has failed to abate or seek reference of the violation within the time prescribed by the secretary pursuant to the provisions of subdivisions (1) and (2), subsection (a), section five of this article and the rules promulgated hereunder, which time may not be unreasonable.

API NO. 47- SI - OIS94
OPERATOR WELL NO. 10H
Well Pad Name: Goudy


Pursuant to West Virginia Code § 22-6A-10(g), any person entitled to submit written comments to the secretary pursuant to subsection (a), section eleven of this article, shall also be entitled to receive from the secretary a copy of the permit as issued or a copy of the order modifying or denying the permit if the person requests receipt of them as a part of the written comments submitted concerning the permit application. Such persons may request, at the time of submitting written comments, notice of the permit decision and a list of persons qualified to test water.

Notice is hereby given by:

Well Operator:Gastar Exploration USA, Inc.Address:229 West Main Street, Suite 301Telephone:304/622-4796Clarksburg, WV 26301Email:dperkinson@gastar.comFacsimile:304/622-4824

Oil and Gas Privacy Notice:

The Office of Oil and Gas processes your personal information, such as name, address and telephone number, as part of our regulatory duties. Your personal information may be disclosed to other State agencies or third parties in the normal course of business or as needed to comply with statutory or regulatory requirements, including Freedom of Information Act requests. Our office will appropriately secure your personal information. If you have any questions about our use or your personal information, please contact DEP's Chief Privacy Officer at deprivacyofficer@wv.gov.



Subscribed and sworn before me this the day of 14, 2012.

Notary Public

My Commission Expires June 11, 2020

Office of Cit & Gas
SEP 2 1 2012
Wy Department of overconmental Protection



WW-6A5 (1/12)

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS NOTICE OF PLANNED OPERATION

Date of Notice	Requirement: notice shall be provided no later to be: 09/13/2012 Date Permit Application			application.	
Delivery met	hod pursuant to West Virginia Code § 22-6A-	16(c)			
	FIED MAIL	O VERY			
return receipt the planned of required to be drilling of a l damages to th	V. Va. Code § 22-6A-16(c), no later than the da requested or hand delivery, give the surface own operation. The notice required by this subsection provided by subsection (b), section ten of this are norizontal well; and (3) A proposed surface use surface affected by oil and gas operations to the ser required by this section shall be given to the surface.	er whose land on shall inclu- ticle to a surf and compense extent the da	d will be used for de: (1) A copy face owner whose sation agreement amages are com	or the drilling of a horizontal well notice of of this code section; (2) The information se land will be used in conjunction with the at containing an offer of compensation for pensable under article six-b of this chapter	
	eby provided to the SURFACE OWNER(s) s listed in the records of the sheriff at the time of ustries, Inc.		Bayer Material Scienc	e, LLC	
Address: P.O.	Box 191	Address: 100 Bayer Road			
New	Martinsville, WV 26155		Pittsburgh, PA 152	05	
operation on State: County: District:	the surface owner's land for the purpose of drillin West Virginia Marshall	UTM NAD 83 Easting: Northing	Il well on the tra Easting: Northing:	ct of land as follows: 514,668.1 Meters 4,398,561.4 Meters	
Quadrangle:		Public Road		County Route 2/2	
Watershed:	Tributary of the Ohio River	Generally use	ed farm name:	PPG Industries, Inc.	
to be provide horizontal we surface affect information re headquarters, gas/pages/defa	Vest Virginia Code § 22-6A-16(c), this notice shat d by W. Va. Code § 22-6A-10(b) to a surface of a surface shat (3) A proposed surface use and compensated by oil and gas operations to the extent the datelated to horizontal drilling may be obtained from located at 601 57 th Street, SE, Charleston, Valut.aspx.	owner whose tion agreeme images are co om the Secret WV 25304	e land will be unt containing an ompensable und ary, at the WV (304-926-0450)	ased in conjunction with the drilling of a offer of compensation for damages to the er article six-b of this chapter. Additional Department of Environmental Protection or by visiting www.dep.wv.gov/oil-and-	
Well Operator		Address:	229 West Main St., S	· · · · · · · · · · · · · · · · · · ·	
Telephone:	304-622-4796		Clarksburg, WV 26	301	
Email:	dperkinson@gastar.com	Facsimile:	304-622-4824		
Oil and Gas I	Privacy Notice:				

The Office of Oil and Gas processes your personal information, such as name, address and telephone number, as part of our regulatory duties. Your personal information may be disclosed to other State agencies or third parties in the normal course of business or as needed to comply with statutory or regulatory requirements, including Freedom of Information Act requests. Our office will appropriately secure your personal information. If you have any questions about our use or your personal information, please contact DEP's Chief Privacy Officer at depprivacyofficer@wv.gov.





WEST VIRGINIA DEPARTMENT OF TRANSPORTATION

Division of Highways

Office of the District Engineer/Manager
District Six

Earl Ray Tomblin Governor 1 DOT Drive · Moundsville, West Virginia 26041-2353 · (304) 843-4008

Paul A. Mattox, Jr., P. E. Secretary of Transportation/ Commissioner of Highways

August 31, 2012

Mr. Dave Perkinson Landman Gastar Exploration USA, Inc 229 West Main Street, Suite 301 Clarksburg, West Virginia 26301

Dear Mr. Perkinson:

Your approved copy of Permit Number 06-12-0518 of type *Approach-Drilling* is attached. A description of the work and applicable restrictions are on the attached permit.

Your attention is called to Item 3 and 4 of Form MM-109. Item 3 states that it is mandatory that the applicant notify the County Superintendent, Rick Poe, at (304) 843-4056 at least 48 hours prior to starting construction of the project. Item 4 states that it is mandatory that the applicant provide all necessary traffic control to protect workers and the traveling public. All flaggers are required to have safety vests and stop/slow paddles.

Failure to comply with any clause of this permit will result in the cancellation of your permit and cause all work to cease, until all requirements are met.

A copy of this permit shall be available on the job at all times while the work is in progress for inspection by the West Virginia Division of Highways personnel.


Yours truly,

Daniel W. Sikora, P.E.


Acting District Engineer


DWS:RAK:cjh

Attachments

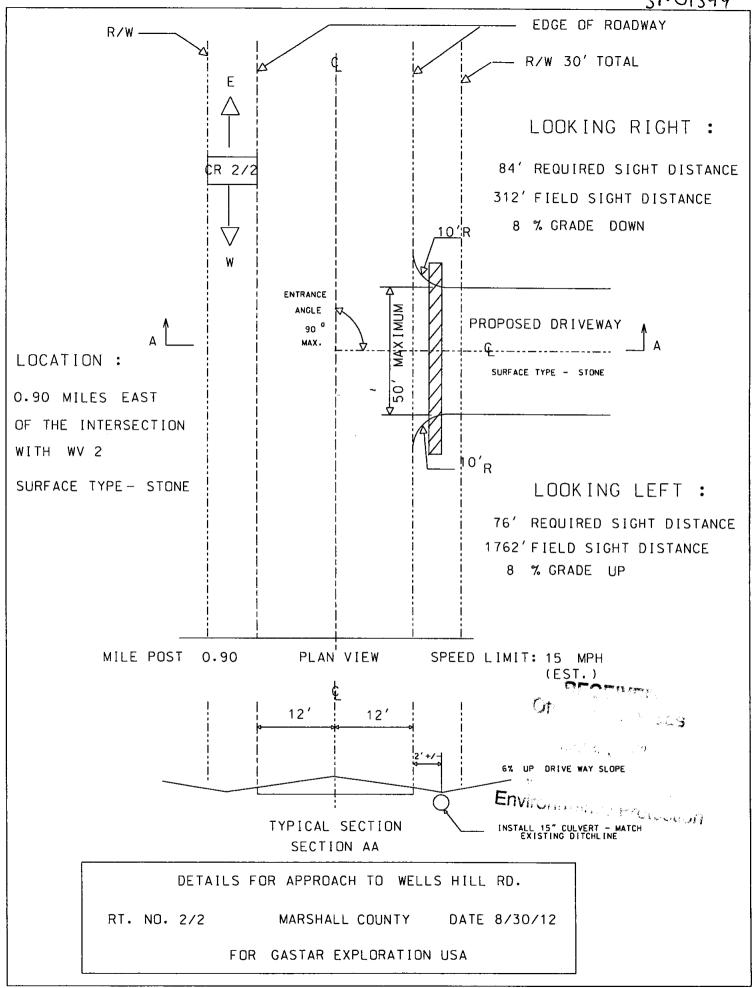

MARSHAU Co. N.P. 6.90 00 1/2

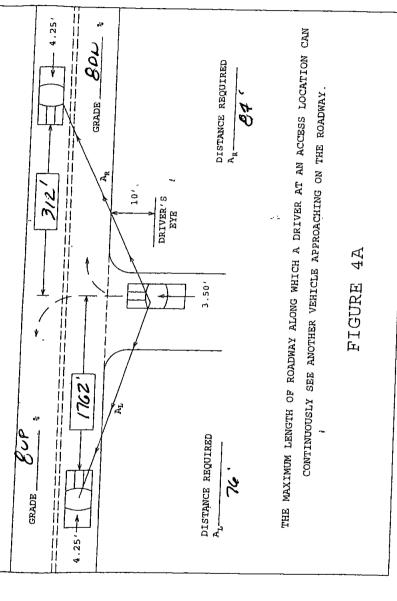

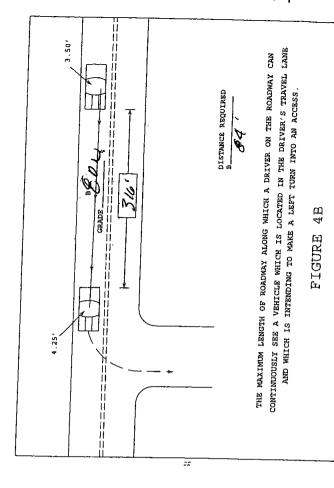

3.50'

0000

GRADE

08120518

DISTANCE REQUIRED

4.25

THE MAXIMUM LENGTH OF ROADMAY ALONG WHICH A DRIVER OF A VEHICLE INTENDING TO MAKE A LEFT TURN INTO AN ACCESS CAN CONTINUOUSLY SEE A VEHICLE APPROACHING

FROM THE OPPOSITE DIRECTION.

FIGURE 4C

Maintenance Permit Information Sheet

Permit for Drilling Operations

Applicant

Company Name: Gastar Exploration USA, Inc.

Address: 229 West Main Street, Suite 301

City: Clarksburg

State: WV

Zip Code: 26301

Contact Person: Dave Perkinson

Telephone: 304/622-4796

Cell Phone: 304/966-0362

Site Location

Route Name: Wells Hill Lane

Route #: 2/2

Decimal Format GPS N: 39. 7391310

W: 080. 8284569

County: Marshall

Site Name: Goudy Unit

Project #:

Description:

On Route 2/2 being 0.9 miles north of the Junction of West Virginia State Route 2. Access Road

will be on the right.

Routing

(Start with departure from a US Route or WV State Route)

Name & Rte.#

Beg MP

End MP

Surface Type

Condition

Departing West Virginia State Route 2

The second secon

CR 2/2

0.00

0.9

Stone

Gr Good


Environment Proposition

08120510

Addendum to Permit

This addendum, made this 9th day of August 2 012, between the West Virginia
Department of Transportation, Division of Highways, a statutory company hereinafter called the Division
and Gastar Exploration USA, Inc.
Address: 229 West Main Street, Suite 301, Clarksburg, WV 26301 Phone: 304/622-4796
Hereinafter called APPLICANT.
The Applicant has filed with the DIVISION a written application for the following named routes and location:
Gastar Exploration USA, Inc. (Goudy Unit) Departing State Route 2 at the intersection of County Route 2/2. Travel approximately 0.9 miles on County Route 2/2. Assess Road will be a self-record to the county Route 2/2.
Access Road will be on the right staked in pink ribbons.
Applicant shall properly repair and maintain any and all damages that may result to said bridges, highways, shoulders, and ditches from hauling activities of Applicant, its agents, contractors and employees, to as good a condition as when the permit was issued, as determined by the District Engineer of the DIVISION having jurisdiction over the work permitted, or pay damages therefore in the amount to sufficiently restore such bridges, roads, highways, shoulders, and ditches to original condition; and shall reimburse the DIVISION for all inspection costs incurred by it in connection with said work and repairs of such damages and faithfully comply with all terms and conditions of said permits and save harmless the DIVISION and the State of West Virginia from all losses resulting from the conduct of said work and repairs; then this Bond shall be released; or otherwise will remain in full force and effect.
Bond Amount: 1,000,000.00 Bond Number: SUR0013400 Date: 2/10/11

Environmental street all

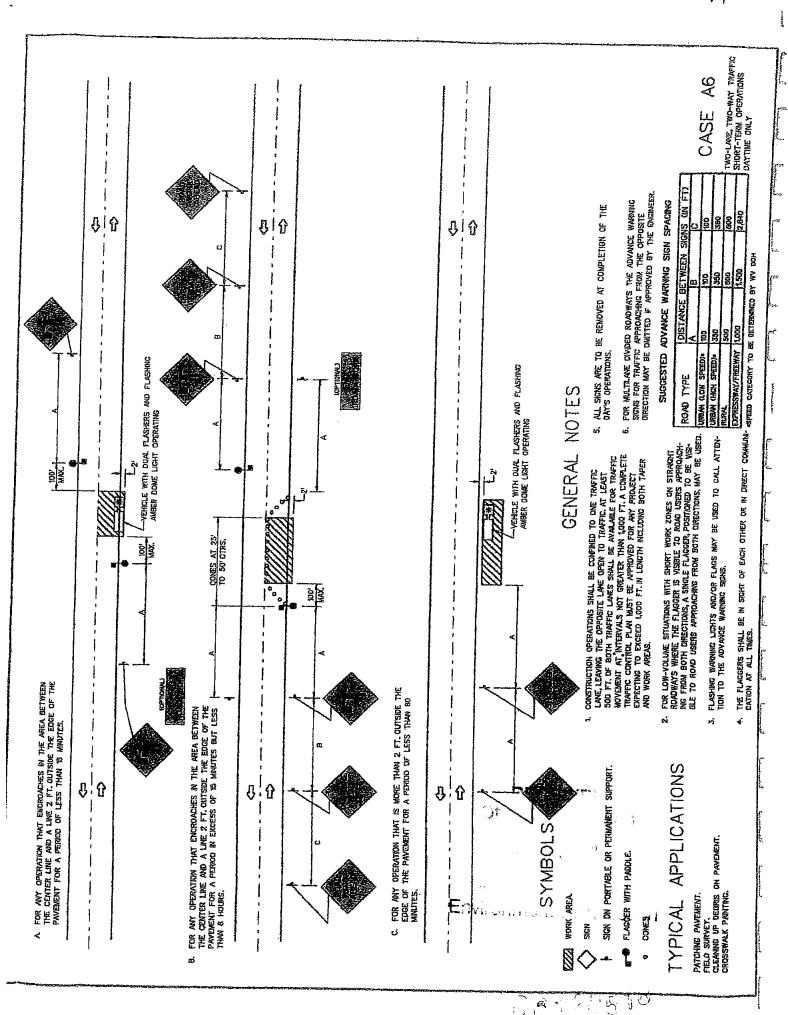



WEST VIRGINIA DEPARTMENT OF TRANSPORTATION

Division of Highways

OFFICE OF THE DISTRICT ENGINEER
DISTRICT SIX
1 DOT Drive - Moundsville, WV 26041-2353 • 304/843-4008

Joe Manchin III Governor

Drilling Operators Permit Conditions & Requirements

- 1. Applicant must place eight inches of stone aggregate for a distance of 100 feet from the edge of DOH pavement or traveled way.
- 2. This temporary drilling permit will expire when drilling operations cease. No work may be performed at-this site after completion date, without obtaining written permission from District Six Permit Office you may call us at (304)843-4020.
- 3. The applicant must remove this temporary approach and return DOH right-of-way to its original condition before completion date.
- 4. This permit is valid only as a temporary access for the purpose of a drilling operation. The property owner must submit a separate application to obtain a permanent approach at this site.
- 5. Applicant must provide required Traffic Control at all times. Failure to provide Required Traffic Control will void this permit.
- 6. Applicant will notify County Superintendent, when drilling operations have ceased, for the purpose of a final inspection of this work site and Roadway.
- 7. At no time, may the drilling operation encroach on DOH right-of-way. Specifically, no operations may be conducted on the traveled way or within DOH right-of-way.
- 8. Applicant is responsible for immediate removal of mud and debris from roadway caused by any entity involved in this drilling operation.
- 9. A driveway shall not be approved for parking or loading areas that require backing maneuvers within the state highway right-of-way. Such parking areas must include on-site maneuvering areas and aisles to permit vehicles to enter and exit the site in forward drive without hesitation.

Failure to comply with any condition or requirement will void this permit.

Environ Contract of 1

PERMIT NO.

06120518

WEST VIRGINIA, AS PROVIDED FOR ARTICLE 16, CHAPTER 17; SECTION 8, AMENDED.	IN SECTION 6 AR	TICLE 16 CHAPTED .	I OT COTTON
THIS PERMIT, Made this 14th da	ev of August 2	0.12 hatryaan 4h - 33	mon tup or ** .
DEPARTMENT OF TRANSPORTATION,	DIVISION OF HIGH	WAYS a statutory corpor	EST VIRGINIA
called DIVISION and Gastar Exploration US	A. The	with b, a statutory corpor	ation hereinafter
Address: 229 West Main Steet, Suite 301, Cla	rkshuro W 26301	Phone No: (20)	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \
hereinafter called APPLICANT.	1.0001g, WV 20001	I Holie 140304	.) 966-0362
	WITNESSETH		
In consideration of the hereinafter set ou 17; or Section 9, Article 16, Chapter 17; or Virginia, 1931, as amended, and the rules ar apply to enter	r Section 8, Article 4, and regulations promulga	Chapter 17, of the Officiated thereunder, APPLICA	al Code of West NT does hereby
Route Type & No. CR 2/2	DOH Project No.		(if applicable);
at 0.90 miles east of the intersect	ion with WV 2	Mile Post	0.90
in Marshall Coun			
plans and specifications which are attached he	ereto and made a part he	reof: To construct and man	intain a 50! wide
maximum (temporary) approach which will sketch and plans, All work must comply's	originate on the right- withhihe WIOT DOH Speci	of-way of CR 2/2 as shown fictations.	on the attached
APPLICANT further agrees to accept the		et forth:	
 APPLICANT shall deposit with DIVIS certified or cashier's check, or executed and inspection costs DIVISION may expense incurred in restoring said high damages that may result within one (1) 	bond with surety satisfi sustain by reason of the nway to its original con	actory to DIVISION to con ne granting of this permit dition or the proper repai	ver any damage , including any r of any and all
2. APPLICANT agrees to reimburse DIVI A. For any inspection costs incurr B. At \$ per lines C. At \$ per lines	ed under this permit. ar foot for for	eet of water line installed i	under this permit under this permit
 APPLICANT shall notify DIVISION Failure to comply will be cause for cancer. 		dvance of the date the w	ork will begin.
 APPLICANT agrees to protect its en accordance with the current Division Construction and Maintenance Operation 	of Highways manual "		
5. APPLICANT agrees to comply with a under this permit.			mance of work
6. Supplementary conditions cited on the hereof.	everse side of this pern	nit are understood and agr	eed to be a part
7. The work authorized under this permit s	hall be completed on or	before (Date): August 14,	2013
Applicant's signature on this permit affirms that al Highways Encroachment Permit Form MM-109, re	ll text herein is a verbatim	reproduction of The West Vi	rginia Division of
RECOMMENDED:	054	111	1
Title Permit Supervisor	Dân	Signature and Title of Applica	At At
BOND REQUIREMENT: BOND NO. SUROO13400 DATE 02/1	APPROVED: 0/11	anual Sit	
Attached On File	Acting :	District Engin <u>e</u> er	
INSPECTION: Owner/Consultant Full Time Part Time	Title	West Virginia Division of Highw	nys is a gradual to the same
Periodic Reimbursable No Cost	DEDMIT NO	061205	18
AUTHORIZATION NO:	PERMIT NO	·	

CHAPTER 17 WEST VIRGINIA CODE, 1931

§17-4-8. Use of roadbed by railroad, telephone company, etc.

No railroad or electric or other railway shall be constructed upon the roadbed of any state road, except to cross the same, nor shall any person, firm or corporation enter upon or construct any works in or upon such road, or lay or maintain thereon or thereunder any drainage, sewer or water pipes, gas pipes, electric conduits or other pipes, nor shall any telephone, telegraph or electric line or power pole, or any other structure whatsoever, be erected upon, in or over any portion of a state road, except under such restrictions, conditions and regulations as may be prescribed by the state road commissioner. Whenever any railroad or electric or other railway, heretofore or hereafter constructed, shall cross any state road, it shall be required to keep its own roadbed, and the bed of the road or highway at such crossing, in proper repair, or else to construct and maintain an overhead or undergrade crossing, subject to the approval of the state road commissioner; and the tracks of such railroad or railway at grade crossings shall be so constructed as to give a safe and easy approach to and across the same, and when the construction of such approaches is made necessary by a change in the railroad grade at the grade crossing, the cost shall be upon the railway company.

§17-16-6. Permit by commission or county court for openings in or structures on public roads; franchises and

easements of oil, etc., transportation companies. No opening shall be made in any state or county-district road or highway, nor shall any structure be placed therein or thereover, nor shall any structure, which has been so placed, be changed or removed, except in accordance with a permit from the state road commission or county court, as the case may be. No road or highway shall be dug up for laying or placing pipes, sewers, poles or wires, or for other purposes, and no trees shall be planted or removed or obstructions placed thereon, without the written permit of the commission or county court, or its duly authorized agent, and then only in accordance with the regulations of the commission or court. The work shall be done under the supervision and to the satisfaction of the commission or court; and the entire expense of replacing the highway in as good condition as before shall be paid by the persons to whom the permit was given, or by whom the work was done: Provided, however, That nothing herein contained shall be so construed as to prevent any oil or gas company or person having a proper permit or franchise from transporting oil or gasoline along any of the public highways of this State, nor to give such company a franchise without paying to the landowners through whose lands such road passes the usual and customary compensation paid or to be paid to the landowners for such right of way. Any grant or franchise when made shall be construed to give to such company or person only the right to use the easement in such public road.

A violation of any provision of this section shall be a misdemeanor, and the person or corporation violating the same shall, upon conviction thereof, be fined not less than twenty-five nor more than one hundred dollars for each offense.

§17-16-9. Private driveways or approaches to roads; obstruction of ditches.

The owner or tenant of land fronting on any state road shall construct and keep in repair all approaches or driveways to and from the same, under the direction of the state road commission, and, likewise, the owner or tenant of land fronting on any county-district road shall construct and keep in repair approaches or driveways to and from the same, under the direction of the county road engineer, and it shall be unlawful for such owner or tenant to fill up any ditch, or place any material of any kind or character in any ditch, so as in any manner to obstruct or interfere with the purposes for which it was made.

SUPPLEMENTARY CONDITIONS

1. The person, firm or corporation to whom a permit is issued agrees to hold the State of West Virginia and DIVISION harmless on account of any damages to persons or property which may arise during the process of the work authorized by this permit or by reason thereof. 2. Applications for permission to perform work within highway rights of way shall be made on DIVISION'S standard

permit form and shall be signed by the authorized representative of the person, firm or corporation applying.

3. The APPLICANT shall give detailed information concerning the work to be performed and the application must

include a sketch sufficient to show the nature of the work performed. 4. APPLICANT, his agents, successor, heirs or assigns, contractors or any other person, firm or corporation working under APPLICANT'S real or apparent authority, shall perform the work in a manner satisfactory to DIVISION. Damage to the road resulting at any time from work authorized under this permit shall be repaired by APPLICANT. Unsatisfactory repairs may be a corrected by DIVISION or its authorized agent and the cost thereof paid by APPLICANT.

5. DIVISION assumes no liability for damage to the proposed work by reason of construction or maintenance work on

the road.

This permit is granted subject to removal of the authorized installation by APPLICANT at no cost to DIVISION when required for improvement of the road, and subject to all regulations now or hereafter adopted by DIVISION.

7. Utility installation shall be in accordance with the current manual, "Accommodation of Utilities on Highway Right of

Driveways shall be in accordance with the current manual, "Rules and Regulations for Constructing Driveways on State Highway Rights-of-Way."

DIVISION reserves the right to cancel this permit at any time, should APPLICANT fail to comply with the terms and conditions under which it is granted.

10. This permit is granted only insofar as the DIVISION has a right to do so.



PLANNED ADDITIVES TO BE USED IN FRACTURING OR STIMULATION

Goudy #3H

Goudy #7H

Goudy #4H

Goudy #9H

Goudy #5H

Goudy # 10H

Goudy # 6H

PRODUCT NAME:

CHEMICAL DESCRIPTION:

PRODUCT USE:

HAZARDOUS COMPONENT

GBW-20C

Hemicellulase Breaker

Breaker - Water

None

ALPHA 1427

Biocide

Glutaraldehyde - CAS#000111-30-8

Quaternary ammonium chloride

CAS # 007173-51-5

Alky dimethyl benzyl ammonium Chloride (C12-16)-CAS#068424-85-1

Ethanol – CAS # 000064-17-5 Water – CAS # 007732-18-5

FRAC SAND

Silica Sand (various mesh sizes)

Proppant

Crystalline silica (quartz)

CAS # 14808-60-7

S-8C, Sand

Silica Sand (100 mesh)

Sand

Silica - CAS # 14808-60-7

GW-3LDF

Gellant - Water

Petroleum Distillate Blend - Proprietary

Guar gum - CAS # 009000-30-0

FRW-18

Friction Reducer

Hydrotreated light distillate

CAS # 064742-47-8

Scaletrol

Scale Inhibitor

Ethylene glycol – CAS#000107-21-1

Diethylene glycol - CAS#000111-46-6

SEP 2 1 2012

Gastar Exploration LTD.

229 West Main Street, Suite 301 · Clarksburg, WV 26301

Phone: (304) 622-4796 · Fax: (304) 622-4824