

ORIGINAL

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

MCELROY COAL COMPANY
Coal Operator or Owner
6126 ENERGY DRIVE MOUNDSVILLE, WV 26041
Address

MCELROY COAL COMPANY
Coal Operator or Owner
6126 ENERGY DRIVE MOUNDSVILLE, WV 26041
Address

MCELROY COAL COMPANY
Lease or Property Owner
6126 ENERGY DRIVE, MOUNDSVILLE, WV 26041
Address

MCELROY COAL COMPANY
Name of Well Operator
6126 ENERGY DRIVE MOUNDSVILLE, WV 26041
Complete Address
CAMERON, WV 7.5'
Well Location
CAMERON
District
MARSHALL
County
M-1561
Well No.
MCELROY COAL COMPANY
Farm

STATE INSPECTOR SUPERVISING PLUGGING *William H. ...* 5-29-13

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

MARK WILSON and **KEVIN S. WRIGHT** being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 8th day of May, 2013 and that the well was plugged in the following manner:

Sand or Zone Record	Filling Material	Casing/Tubing Size	Casing Pulled	Casing Left In
Formation				
Cleaned 12 1/4" hole from the surface to 281'. Reduced hole to 9 7/8". Cleaned 9 7/8" hole from 281' to 945'. Reduced hole to 7 7/8". Cleaned 7 7/8" hole from 945' to 1165'. Tagged solid plug at 1165'. Cleaned 12 1/4" hole through the Pittsburgh Coal seam from 656' to 661'. Left 20' to 16" conductor casing in the hole from the surface to 20'. Cemented hole from 1165' to surface as follows: From 1165' to 861' with Expandable Cement. From 861' to 556' with 235 sacks of Thixotropic Cement with green dye. From 556' to surface with Expandable Cement. A total of 565 sacks of Expandable Cement and 290 sacks of Thixotropic Cement were used to cement the hole from 1165' to surface. Cement did circulate at the surface.	16" Conductor	0'	20'	
Coal Seams		Description of Monument		
Pittsburgh	(656' - 661')	77" of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to the cement plug at ground level.		

RECEIVED
Office of Oil & Gas
MAY 30 2013
WV Department of
Environmental Protection

... and that the work of plugging and filling said well was completed on the 22nd day of May, 2013

And further deponents saith not.


Mark Wilson
Mark Wilson

Kevin S. Wright
Kevin S. Wright

Sworn to and subscribed before me this 29th day of May 2013

Carol A. Mayle
Notary Public

My commission expires: 9-12-2017

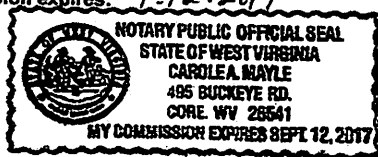

Permit No. 47-51-01624-P
Well No. M-1561

05/31/2013