

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

MCELROY COAL COMPANY
Coal Operator or Owner
6126 ENERGY DRIVE MOUNDSVILLE, WV 26041
Address
MCELROY COAL COMPANY
Coal Operator or Owner
6126 ENERGY DRIVE MOUNDSVILLE, WV 26041
Address
ANDREW K. SMITH
Lease or Property Owner
RR4 BOX 181D CAMERON, WV 26033
Address

MCELROY COAL COMPANY
Name of Well Operator
6126 ENERGY DRIVE MOUNDSVILLE, WV 26041
Complete Address
CAMERON, WV 7.5'
Well Location
CAMERON
District
MARSHALL
County
M-1720
Well No.
SMITH, ANDREW K.
Farm

STATE INSPECTOR SUPERVISING PLUGGING *William J. Buckel* 7-16-13

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

MARK WILSON and **KEVIN S. WRIGHT** being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 10th day of June, 2013 and that the well was plugged in the following manner:

Sand or Zone Record	Filling Material	Casing/Tubing Size	Casing Pulled	Casing Left In
Formation				
Cleaned 12 1/4" hole from the surface to 705'. Reduced hole to 9 7/8". Cleaned 9 7/8" hole from 976' to 1332'. Reduced hole to 7 7/8". Cleaned 7 7/8" hole from 1332' to 1669'. Tagged solid plug at 1669'. Removed 271' of 10 3/4" casing from 705' to 976'. Left 187' of 10 3/4" casing in the hole from 976' to 1163'. Cut remaining 10 3/4" casing at 1082'. Cleaned 12 1/4" hole to 976'. Cleaned 12 1/4" hole through the Pittsburgh Coal seam from 735' to 739'. Left 20' of 16" conductor casing in the hole from the surface to 20'.		10 3/4" Casing	271'	187'
Cemented hole from 1669' to surface as follows: From 1669' to 939' with Expandable Cement. From 939' to 635' with 260 sacks of Thixotropic Cement with green dye. From 635' to surface with Expandable Cement. A total of 645 sacks of Expandable Cement and 260 sacks of Thixotropic Cement were used to cement the hole from 1669' to surface. Cement did circulate at the surface.				
Coal Seams		Description of Monument		
Pittsburgh	(735' - 739')	77' of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to the cement plug at ground level.		

RECEIVED
Office of Oil & Gas
JUL 22 2013
WV Department of
Environmental Protection

... and that the work of plugging and filling said well was completed on the 26th day of June, 2013

And further deponents saith not.


Mark Wilson
Mark Wilson

Kevin S. Wright
Kevin S. Wright

Sworn to and subscribed before me this 8th day of July 2013

Carole A. Mayle
Notary Public

My commission expires: 9-12-2017

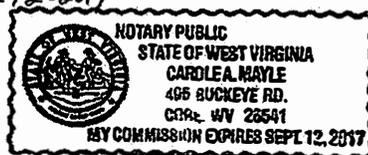

Permit No. **47-51-01637-P**
Well No. **M-1720**

07/26/2013