



---

**west virginia** department of environmental protection

---

Office of Oil and Gas  
601 57th Street SE  
Charleston, WV 25304  
(304) 926-0450  
(304) 926-0452 fax

Earl Ray Tomblin, Governor  
Randy C. Huffman, Cabinet Secretary  
www.dep.wv.gov

July 31, 2013

**WELL WORK PERMIT**


**Horizontal 6A Well**

This permit, API Well Number: 47-5101659, issued to NOBLE ENERGY, INC., is evidence of permission granted to perform the specified well work at the location described on the attached pages and located on the attached plat, subject to the provisions of Chapter 22 of the West Virginia Code of 1931, as amended, and all rules and regulations promulgated thereunder, and to all conditions and provisions outlined in the pages attached hereto. Notification shall be given by the operator to the Oil and Gas Inspector at least 24 hours prior to the construction of roads, locations, and/or pits for any permitted work. In addition, the well operator shall notify the same inspector 24 hours before any actual well work is commenced and prior to running and cementing casing. Spills or emergency discharges must be promptly reported by the operator to 1-800-642-3074 and to the Oil and Gas inspector.

Please be advised that form WR-35, Well Operators Report of Well Work is to be submitted to this office within 90 days completion of permitted well work, as should form WR-34 Discharge Monitoring Report within 30 days of discharge of pits, if applicable. Failure to abide by all statutory and regulatory provisions governing all duties and operations hereunder may result in suspension or revocation of this permit and, in addition, may result in civil and/or criminal penalties being imposed upon the operators.

In addition to the applicable requirements of this permit, and the statutes and rules governing oil and gas activity in WV, this permit may contain specific conditions which must be followed. Permit conditions are attached to this cover letter.

Per 35CSR-4-5.2.g this permit will expire in two (2) years from the issue date unless permitted well work is commenced. If there are any questions, please feel free to contact me at (304) 926-0499 ext. 1654.

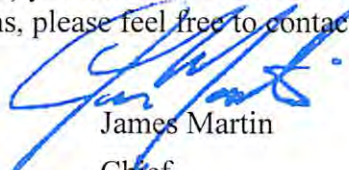

James Martin  
Chief

Operator's Well No: WEB13 DHS  
Farm Name: LUCILLE HARTLEY-LIFE  
**API Well Number: 47-5101659**  
**Permit Type: Horizontal 6A Well**  
Date Issued: 07/31/2013

# PERMIT CONDITIONS

West Virginia Code § 22-6A-8(d) allows the Office of Oil and Gas to place specific conditions upon this permit. Permit conditions have the same effect as law. Failure to adhere to the specified permit conditions may result in enforcement action.

## CONDITIONS

---

1. If the operator encounters an unanticipated void, or an anticipated void at an unanticipated depth, the operator shall notify the inspector within 24 hours. Modifications to the casing program may be necessary to comply with W. Va. Code § 22-6A-5a (12), which requires drilling to a minimum depth of thirty feet below the bottom of the void, and installing a minimum of twenty (20) feet of casing. Under no circumstance should the operator drill more than fifty (50) feet below the bottom of the void or install less than twenty (20) feet of casing below the bottom of the void.
2. When compacting fills, each lift before compaction shall not be more than 12 inches in height, and the fill material shall be within plus or minus 2% (unless soil test results show a greater range of moisture content is appropriate and 95% compaction can still be achieved) of the optimum moisture content as determined by the standard proctor density test, ASTM D698, Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort. Each lift must meet 95 % compaction of the optimum density based on results from the standard proctor density test of the actual soils used in specific engineered fill sites. Each lift shall be tested for compaction, with a minimum of two tests per lift per acre of fill. All test results shall be maintained on site and available for review.
3. Operator shall install signage per § 22-6A-8g (6) (B) at all source water locations included in their approved water management plan within 24 hours of water management plan activation.
4. Oil and gas water supply wells will be registered with the Office of Oil and Gas and all such wells will be constructed and plugged in accordance with the standards of the Bureau for Public Health set forth in its Legislative rule entitled *Water Well Regulations*, 64 C.S.R. 19. Operator is to contact the Bureau of Public Health regarding permit requirements. In lieu of plugging, the operator may transfer the well to the surface owner upon agreement of the parties. All drinking water wells within fifteen hundred feet of the water supply well shall be flow tested by the operator upon request of the drinking well owner prior to operating the water supply well.
5. Pursuant to the requirements pertaining to the sampling of domestic water supply wells/springs the operator shall, no later than thirty (30) days after receipt of analytical data provide a written copy to the Chief and any of the users who may have requested such analyses.
6. If any explosion or other accident causing loss of life or serious personal injury occurs in or about a well or well work on a well, the well operator or its contractor shall give notice, stating the particulars of the explosion or accident, to the oil and gas inspector and the Chief, within 24 hours of said accident.
7. During the casing and cementing process, in the event cement does not return to the surface, the oil and gas inspector shall be notified within 24 hours.

WW - 6B  
(1/12)

**STATE OF WEST VIRGINIA**  
**DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS**  
**W.VA. CODE §22-6A - WELL WORK PERMIT APPLICATION**

1) Well Operator: Noble Energy, Inc.

|           |          |         |             |
|-----------|----------|---------|-------------|
| 494501907 | Marshall | Webster | Majorsville |
|-----------|----------|---------|-------------|

  
Operator ID County District Quadrangle

2) Operator's Well Number: WEB13DHS Well Pad Name: WEB13

3 Elevation, current ground: 1265.72' Elevation, proposed post-construction: 1240'

4) Well Type: (a) Gas  Oil \_\_\_\_\_  
Other \_\_\_\_\_  
(b) If Gas: Shallow  Deep \_\_\_\_\_  
Horizontal

5) Existing Pad? Yes or No: No

6) Proposed Target Formation(s), Depth(s), Anticipated Thicknesses and Associated Pressure(s):  
Target - Marcellus, Depth - 6630', Thickness - 48', Pressure - 4407#

7) Proposed Total Vertical Depth: 6668'

8) Formation at Total Vertical Depth: Marcellus

9) Proposed Total Measured Depth: 13,443'

10) Approximate Fresh Water Strata Depths: 128', 200', 300'

11) Method to Determine Fresh Water Depth: Offset well data

12) Approximate Saltwater Depths: 1300' (None noted in offsets)

13) Approximate Coal Seam Depths: Pittsburgh - 703'

14) Approximate Depth to Possible Void (coal mine, karst, other): No voids anticipated

15) Does land contain coal seams tributary or adjacent to, active mine? Yes-Shoemaker Mine (see attached) Depth of mine approx 700'

16) Describe proposed well work: Drill the vertical depth to the Onondaga at an estimated total vertical depth of approximately 6,668 feet, log, plug back to Marcellus at approximately 6630'. Drill Horizontal leg - stimulate and produce the Marcellus Formation. If we should encounter an unanticipated void we will install casing at a minimum of 20' below the void but not more than 50' below the void, set a basket and grout to surface. Please see attached mine maps provided by Consol Energy detailing their Shoemaker Mine and distance to WEB13.

17) Describe fracturing/stimulating methods in detail:  
The stimulation will be multiple stages divided over the lateral length of the well. Stage spacing is dependent upon engineering design. Slickwater fracturing technique will be utilized on each stage using sand, water, and chemicals as described in the attached.

18) Total area to be disturbed, including roads, stockpile area, pits, etc, (acres): 20.46

19) Area to be disturbed for well pad only, less access road (acres): 16.58


RECEIVED  
Office of Oil and Gas

WRH  
6-12-13


JUL 25 2013

WV Department of  
Environmental Protection

08/02/2013

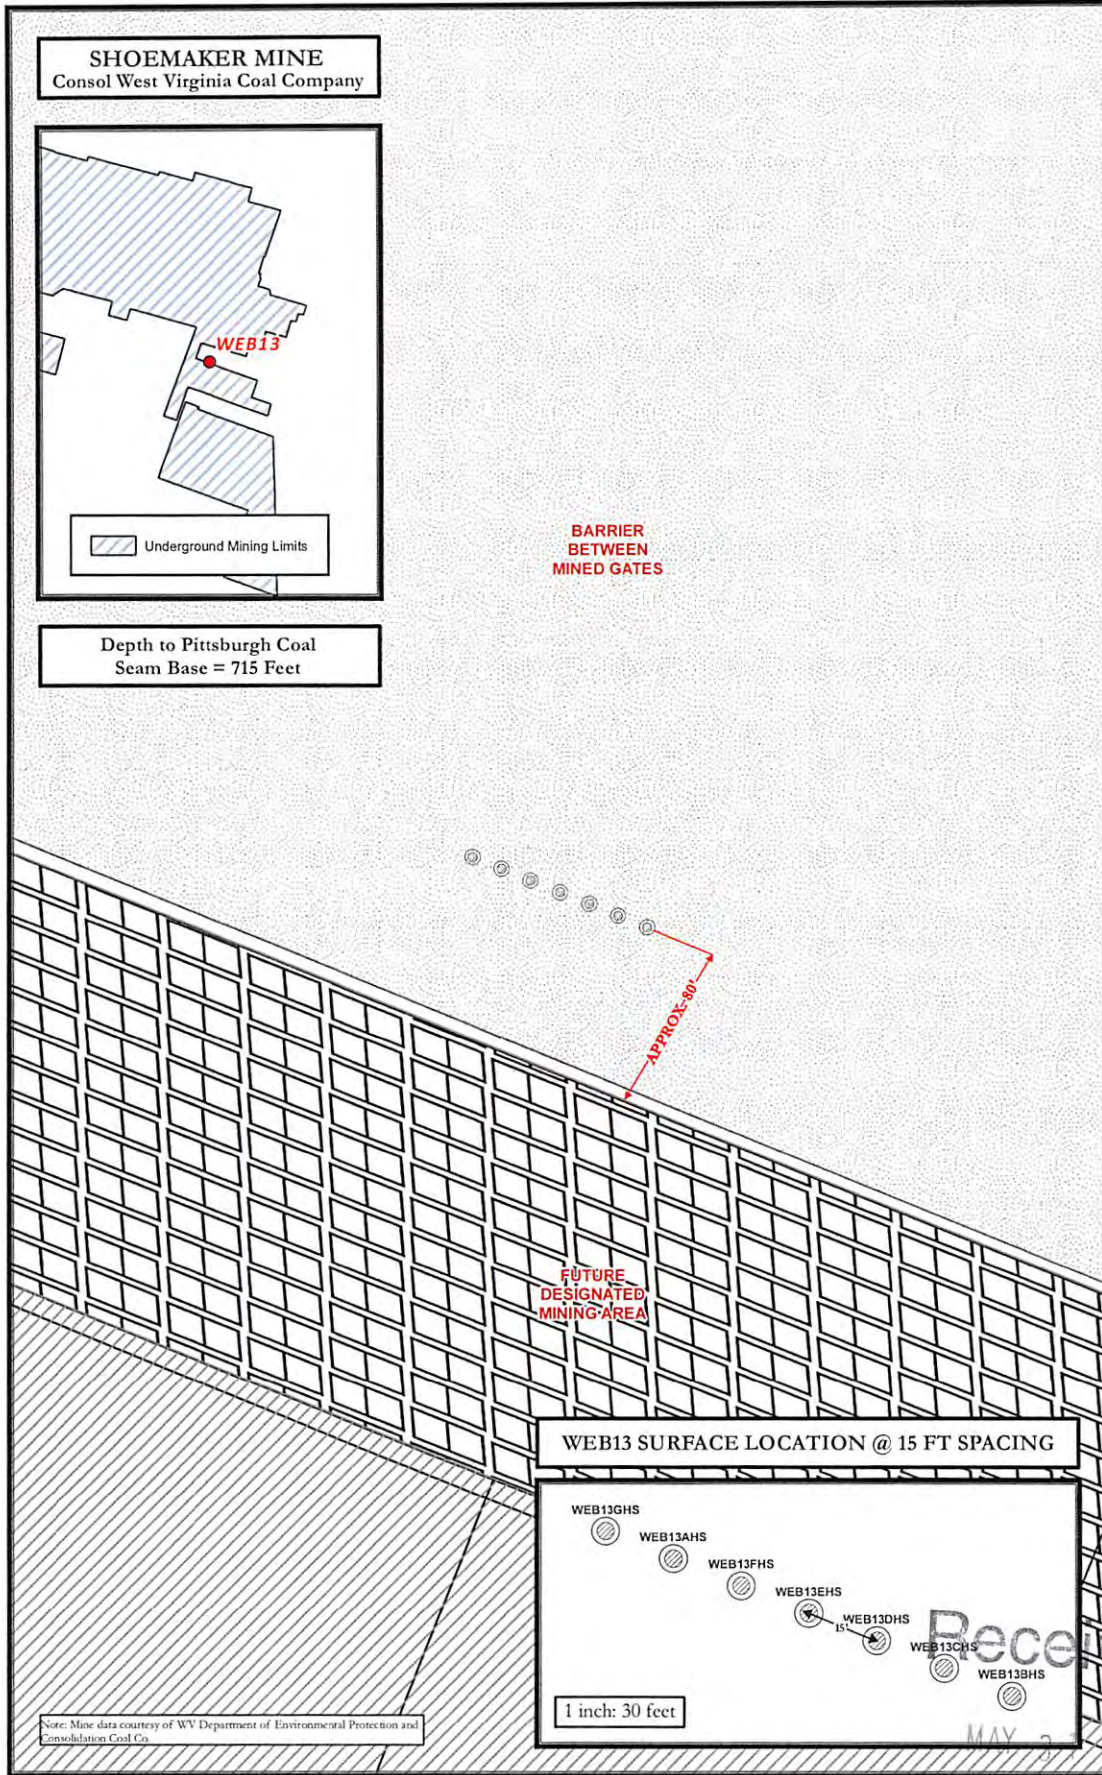

**SHOEMAKER MINE**  
Consol West Virginia Coal Company

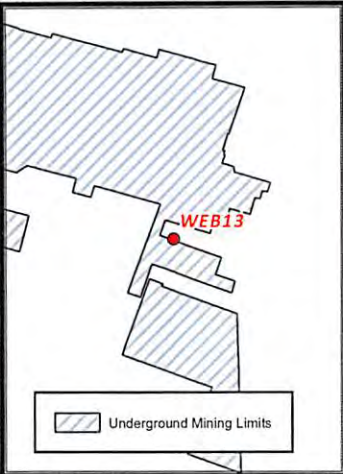


Depth to Pittsburgh Coal Seam Base = 715 Feet

**BARRIER BETWEEN MINED GATES**


**APPROX. 30'**

**FUTURE DESIGNATED MINING AREA**

**WEB13 SURFACE LOCATION @ 15 FT SPACING**

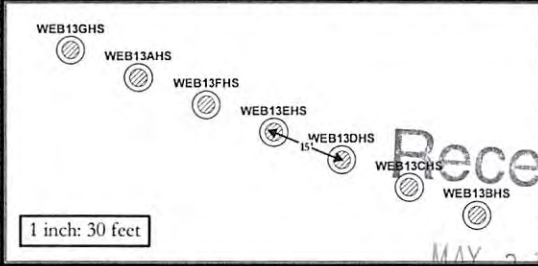

**WEB13 SITE SAFETY PLAN**  
- WELLHEAD TOPHOLE LOCATION -  
© Surface Hole Locations





Projection: NAD\_1927\_StatePlane\_West\_Virginia\_North\_FIPS\_4701  
Units: Foot US

**noble energy** Office of Oil and Gas  
Division of Environmental Protection  
Date: 1/27/2013  
Author: [illegible]  
Reviewer: [illegible]  
Scale: 5/6  
Disclaimer: All data is licensed for use by Noble Energy Inc. use only.

Received

MAY 3 2013

SI-1659

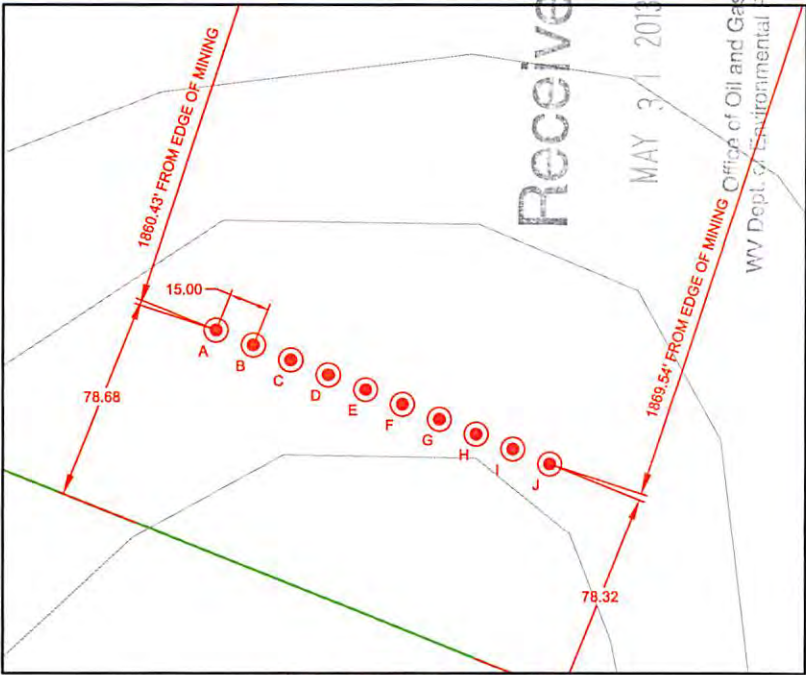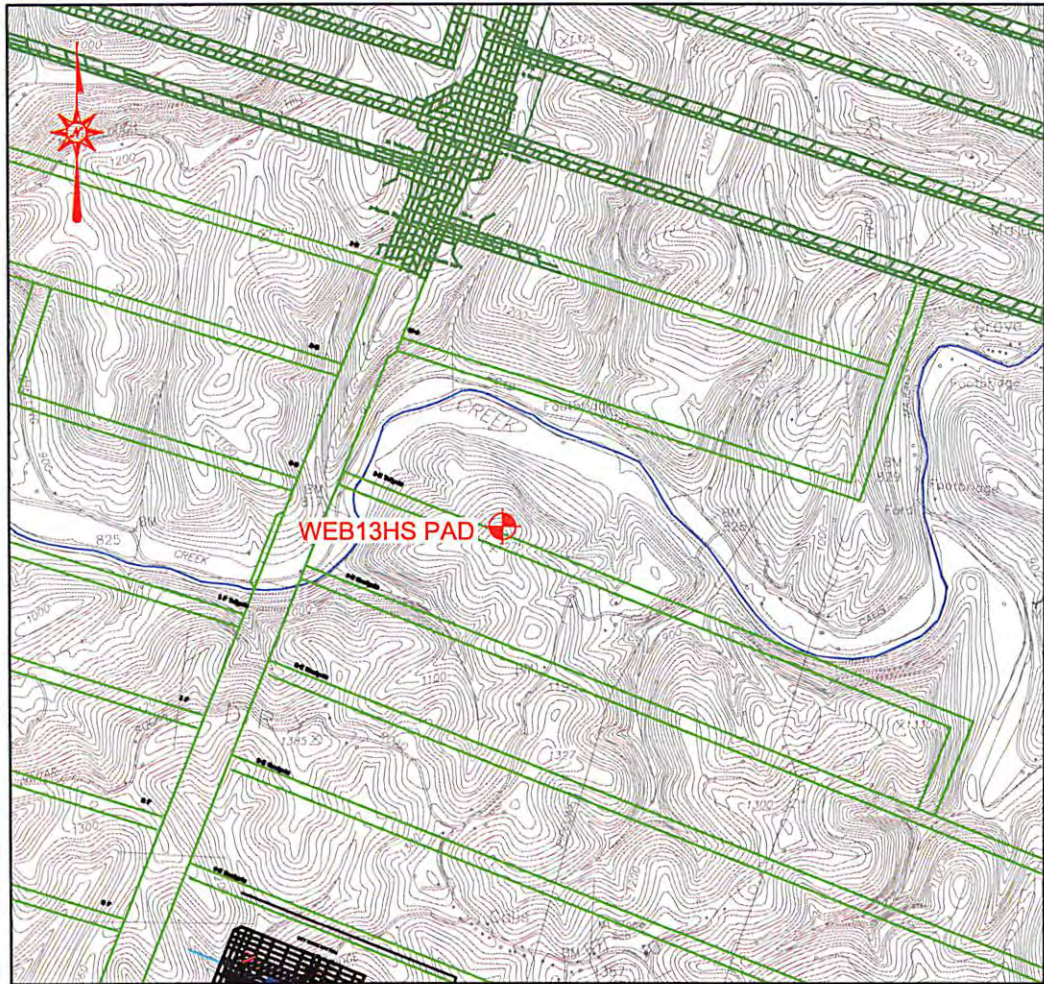

WEB13HS WELL ORIENTATION (NOT TO SCALE)

Received

MAY 31 2013

Office of Oil and Gas  
WV Dept. of Environmental Protection

|                               |                         |
|-------------------------------|-------------------------|
| CLIENT<br><b>NOBLE ENERGY</b> |                         |
| PROJECT<br><b>WEB13HS PAD</b> | DATE<br><b>12-14-12</b> |

ALL DIMENSIONS RELATED TO COAL LOCATION (EXISTING AND/OR PROPOSED) ARE BASED ON INFO PROVIDED BY CONSOLIDATION COAL COMPANY. THIS INFO MAY NOT BE CURRENT WITH MINING PLANS. ANY QUESTIONS OR CONCERNS PERTAINING TO THE LOCATION OF COAL SHOULD BE DIRECTED TO CONSOLIDATION COAL COMPANY.



|                        |                      |
|------------------------|----------------------|
| DATE<br><b>1-16-13</b> | REVISION<br><b>1</b> |
|------------------------|----------------------|

**BLUE MOUNTAIN ENGINEERING**

# Map from a Flex Viewer application

Powered by ArcGIS



Copyright 2010 ESRI. All rights reserved. Printed on Thu Mar 28 2013 10:46:18 AM

# Received

MAY 31 2013

Office of Oil and Gas  
WV Dept. of Environmental Protection

08/02/2013

20)

CASING AND TUBING PROGRAM

-LKC

| TYPE         | Size    | New or Used | Grade  | Weight per ft. | FOOTAGE: For Drilling | INTERVALS: Left in Well | CEMENT: Fill -up (Cu. Ft.)                         |
|--------------|---------|-------------|--------|----------------|-----------------------|-------------------------|--|
| Conductor    | 30"     | New         | LS     | 81.3#          | 40'                   | 40'                     | CTS  |
| Fresh Water  | 20"     | New         | LS     | 94#            | 400'                  | 400'                    | cts 15.6 ppg 40% excess yield 1.18                 |
| Coal         | 13 3/8" | New         | J-55   | 54.5#          | 813'                  | 813'                    | CTS 15.6 ppg 30% excess Yield 1.18                 |
| Intermediate | 9 5/8"  | New         | J-55   | 36#            | 3123'                 | 3123'                   | cts 15.6 ppg 30% excess yield 1.18                 |
| Production   | 5 1/2"  | New         | HCP110 | 20#            | 13,443'               | 13,443'                 | at least 500' above shallowest producing formation |
| Tubing       |         |             |        |                |                       |                         |  |
| Liners       |         |             |        |                |                       |                         |  |

| TYPE         | Size    | Wellbore Diameter | Wall Thickness | Burst Pressure | Cement Type | Cement Yield |
|--------------|---------|-------------------|----------------|----------------|-------------|--------------|
| Conductor    | 30"     | 36"               | .25            | 2110           | Type 1      | 1.18         |
| Fresh Water  | 20"     | 26"               | .438           | 2730           | Type 1      | 1.18         |
| Coal         | 13 3/8" | 17 1/2"           | .380           | 2730           | Type 1      | 1.18         |
| Intermediate | 9 5/8"  | 12 3/8"           | .352           | 3520           | Type 1      | 1.18         |
| Production   | 5 1/2"  | 8 3/4" & 8 1/2"   | .361           | 12,640         | Type 1      | 1.27         |
| Tubing       |         |                   |                |                |             |              |
| Liners       |         |                   |                |                |             |              |

PACKERS

|             |  |  |  |  |
|-------------|--|--|--|--|
| Kind:       |  |  |  |  |
| Sizes:      |  |  |  |  |
| Depths Set: |  |  |  |  |

Received

MAY 31 2013

51-1659



**DRILLING WELL PLAN**  
**WEB-13D-HS (Marcellus HZ)**  
**Macellus Shale Horizontal**  
**Marshall County, WV**

| Ground Elevation          |                                    | 1240'           |  | WEB-13D SHL (Lat/Long) |                      |   | (531273.82N, 1705694.75E) (NAD27)  |  |   |
|---------------------------|------------------------------------|-----------------|--|------------------------|----------------------|---|--|--|---|
| Azm                       |                                    | 323°            |  | WEB-13D LP (Lat/Long)  |                      |   | (531793.8N, 1705829.75E) (NAD27)   |  |   |
| WELLBORE DIAGRAM          |                                    | 323°            |  | WEB-13D BHL (Lat/Long) |                      |   | (536839.85N, 1702027.48E) (NAD27)  |  |   |
| HOLE                      | CASING                             | GEOLOGY         | MD                                     | TVD                    | MUD                  | CEMENT  | CENTRALIZERS   | CONDITIONING   | COMMENTS  |
| 36                        | 30" 81.3#                          | Conductor       | 40                                     | 40                     | AIR                  | To Surface  | N/A  | Ensure the hole is clean at TD.  | Stabilize surface fill/soil. Conductor casing = 0.25" wall thickness  |
| 26                        | 20" 94#                            | Surface Casing  | 400                                    | 400                    | AIR                  | 15.6 ppg Type 1 + 2% CaCl, 0.25# Lost Circ 30% Excess Yield = 1.18  | Centralized every 3 joints to surface                                    | Fill with KCl water once drilled to TD. Once casing is at setting depth, circulate a minimum of one hole volume prior to pumping cement.                                 | Surface casing = 0.438" wall thickness Burst=2730 psi   |
| 17 1/2                    | 13-3/8" 54.5# J-55 BTC             | Pittsburgh Coal | 703                                    | 703                    | AIR                  | 15.6 ppg Type 1 + 2% CaCl, 0.25# Lost Circ 30% Excess Yield = 1.18  | Bow Spring on first 2 joints then every third joint to 100' form surface | Fill with KCl water once drilled to TD. Once casing is at setting depth, circulate a minimum of one hole volume prior to pumping cement.                                 | Intermediate casing = 0.360" wall thickness Burst=2730 psi  |
| 12 3/8                    | 9-5/8" 36# J-55 LTC                | Big Lime        | 1775                                   | 1775                   | AIR                  | 15.6ppg Class A +0.4% Ret, 0.15% Disp, 0.2% AntiFoam, 0.125#/sk Lost Circ 20% Excess Yield=1.19 To Surface                      | Bow spring centralizers every third joint to 100' feet from surface.     | Fill with KCl water once drilled to TD. Once casing is at setting depth, circulate a minimum of one hole volume prior to pumping cement.                                 | Casing to be ran 250' below the 5th Sand. Intermediate casing = 0.352" wall thickness Burst=3520 psi                              |
|                           |                                    | Big Injun       | 1844                                   | 1844                   |                      |   |  |  |   |
|                           |                                    | 5th Sand Base   | 2873                                   | 2873                   |                      |   |  |  |   |
|                           |                                    | Int. Casing     | 3123                                   | 3123                   |                      |   |  |  |   |
| 8.75" Vertical            | 5-1/2" 20# HCP-110 TXP BTC         | Warren Sand     |  | 4331                   | 8.0ppg - 9.0ppg SOBM | 14.8ppg Class A 25:75:0 System +2.6% Cement extender, 0.7% Fluid Loss additive, 0.45% high temp retarder, 0.2% friction reducer | Rigid Bow Spring every third joint from KOP to TOC                       | Once at TD, circulate at max allowable pump rate for at least 6x bottoms up. Once on bottom with casing, circulate a minimum of one hole volume prior to pumping cement. | Production casing = 0.361" wall thickness Burst=12640 psi Note:Actual centralizer schedules may be changed due to hole conditions |
|                           |                                    | Java            |  | 4988                   |                      |   |  |  |   |
|                           |                                    | Angola          |  | 5218                   |                      |   |  |  |   |
|                           |                                    | Rheinstreet     |  | 5848                   |                      |   |  |  |   |
| 8.75" Curve               |                                    | Cashaqua        |  | 6281                   | 12.0ppg-12.5ppg SOBM |   |  |  |   |
|                           |                                    | Middlesex       |  | 6378                   |                      |   |  |  |   |
|                           |                                    | West River      |  | 6411                   |                      |   |  |  |   |
|                           |                                    | Burkett         |  | 6467                   |                      |   |  |  |   |
|                           |                                    | Tully Limestone |  | 6490                   |                      |   |  |  |   |
|                           |                                    | Hamilton        |  | 6519                   |                      |   |  |  |   |
|                           | Marcellus                          |                 | 6630                                   |                        |                      |   |  |  |   |
| 8.75" - 8.5" Lateral      |                                    | TD              | 13443                                  | 6668                   | 12.0ppg-12.5ppg SOBM | 10% Excess Yield=1.27 TOC >= 200' above 9.625" shoe   | Rigid Bow Spring every joint to KOP                                      |  |   |
| LP @ 6668' TVD / 7125' MD |                                    |                 | 8.75 / 8.5 Hole - Cemented Long String |                        |                      | +/-6319' ft Lateral   |  |  | TD @ +/-6668' TVD +/-13443' MD  |
|                           |                                    |                 | 5-1/2" 20# HCP-110 TXP BTC             |                        |                      |   |  |  | X=centralizers  |
| 8.75" Pilot               | Isolation / Sidetrack Cement plugs | Onondaga        | 6678                                   | 6678                   | 12.0ppg-12.5ppg SOBM | 17.5ppg Class H (SLB) from TD to 200' above KOP (2) 800' balanced plugs w/ 2.375" tubing  | N/A  | Once at TD, circulate at drilling pump rate for at least three hours. TOOH and run OH logs.  | OH logs, loggers on location to call TD. Dir. Surveys shoe to TD  |
|                           |                                    | Pilot Hole TD   | 6777                                   | 6777                   |                      |   |  |  |   |


Received

MAY 31 2013

08/02/2013

Office of Oil and Gas  
 WV Dept. of Environmental Protection



|  |                                       | Well Prognosis     |                 |               |        |
|---|---------------------------------------|--------------------|-----------------|---------------|--------|
| Well Name:  | WEB-13                                | State:             | West Virginia   | Ground level: | 1240   |
| API #:  |                                       | County:            | Marshall        | KB elevation: | 1258   |
| Proposed Target:  | Marcellus                             | Field:             | Majorsville     | Well Azimuth: |        |
| Estimated Thickness:  | 48'                                   | Anticipated Inc:   |                 |               |        |
| Estimated Pressure:   | 4407 psi                              |                    |                 |               |        |
| <b>Proposed Logging information:</b>  |                                       | SLS                | x               | Baker         | WFT    |
| Contact number: Schlumberger call out service, 1-888-564-2583                     |                                       |                    |                 |               |        |
| Quad Combo  | x                                     | PEX/AIT/DSI w/ NGS |                 |               |        |
| Imaging   |                                       |                    |                 |               |        |
| Electron Capture  |                                       |                    |                 |               |        |
| NMR   |                                       |                    |                 |               |        |
| <b>Mudlogging Company:</b>  | Horizon                               | Diversified        |                 |               |        |
| Contact number:   |                                       |                    |                 |               |        |
| <b>Coal information:</b>  | Est. depth of Pittsburgh Coal is 703' |                    |                 |               |        |
| <b>FW shows:</b>  | 128,,                                 |                    |                 |               |        |
| <b>SW shows:</b>  | "                                     |                    |                 |               |        |
| <b>Possible Red Rock:</b>   | "                                     |                    |                 |               |        |
| <b>Formations</b>   | <b>Top</b>                            | <b>Base</b>        | <b>Comments</b> |               |        |
| Pittsburgh Coal   | 703                                   | 713                |                 |               |        |
| Gas Sand  | 1335                                  | 1388               | Top Storage     |               |        |
| 1st Salt Sand   | 1469                                  | 1507               |                 |               |        |
| 3rd Salt Sand   | 1652                                  | 1658               |                 |               |        |
| Big Lime  | 1775                                  | 1844               |                 |               |        |
| Big Injun   | 1844                                  | 2017               |                 |               |        |
| Price Formation   | 2017                                  | 2365               |                 |               |        |
| Murrysville   | 2365                                  | 2378               |                 |               |        |
| 50' Sand  | 2571                                  | 2574               |                 |               |        |
| Gordon  | 2721                                  | 2740               |                 |               |        |
| 5th Sand  | 2839                                  | 2873               | Base Storage    |               |        |
| 9 5/8" casing   | 3123                                  |                    |                 |               |        |
| Speechley Sand  | 3280                                  | 3302               |                 |               |        |
| Warren Sand   | 4331                                  | 4346               |                 |               |        |
| Java Shale  | 4988                                  | 5169               |                 |               |        |
| Pipe Creek Shale  | 5169                                  | 5218               |                 |               |        |
| Angola Shale  | 5218                                  | 5848               |                 |               |        |
| Rhinestreet   | 5848                                  | 6281               |                 |               |        |
| Cashaqua  | 6281                                  | 6378               |                 |               |        |
| Middlesex   | 6378                                  | 6411               |                 |               |        |
| West River  | 6411                                  | 6467               |                 |               |        |
| Burkett   | 6467                                  | 6490               |                 |               |        |
| Tully Limestone   | 6490                                  | 6519               |                 |               |        |
| Hamilton  | 6519                                  | 6630               |                 |               |        |
| Marcellus   | 6630                                  | 6678               |                 |               |        |
| Cherry Valley   | 6637                                  | 6639               |                 |               |        |
| Onondaga  | 6678                                  |                    |                 |               |        |
| Huntersville  |                                       |                    |                 |               |        |
| <b>Proposed Lateral Targets:</b>  | Landing                               | 6668               | BHL             | 6668          | in TVD |
|   | Landing                               |                    | BHL             |               | in MD  |
| <b>Proposed Casing Strings</b>  | <b>Bit Size</b>                       | <b>Casing OD</b>   | <b>Depth</b>    |               |        |
| Conductor Casing:   | 26                                    | 20                 | 40              |               |        |
| Fresh Water Casing:   | 17.5                                  | 13.375             | 813             | Coal Elev Map |        |
| Intermediate Casing:  | 12.25                                 | 9.625              | 3123            |               |        |
| Production Casing:  | 8.75                                  | 5.5                | 0               |               |        |

Received

MAY 31 2013

Office of Oil and Gas  
WV Dept. of Environmental Protection

08/02/2013

Prog Created By: Matt Fry  
Prog Creation Date: 3/18/2013

21) Describe centralizer placement for each casing string. Conductor - No centralizers used. Fresh Water & Coal -  
Bow spring centralizers on first 2 joints then every third joint to 100 feet from surface. Intermediate - Bow spring  
centralizers every third joint to 100' from surface.  
Production - Rigid bow spring every third joint from KOP to TOC. Rigid bow spring every joint to KOP.

---

---

---

---

---

---

---

---

22) Describe all cement additives associated with each cement type. Conductor - 1.15% CaCl2.  
Fresh Water - "15.6 ppg Type 1 + 2% CaCl, 0.25# Lost Circ 20% Excess Yield = 1.18  
Intermediate - "15.6ppg Class A +0.4% Ret, 0.15% Disp, 0.2% AntiFoam, 0.125#/sk Lost Circ 30% Excess Yield=1.18 To Surface"  
Production: "14.8ppg Class A 25:75:0 System +2.6% Cement extender, 0.7% Fluid Loss additive, 0.45% high temp retarder, 0.2% friction reducer  
15% Excess Yield=1.27 TOC >= 200' above 9.625" shoe.

---

---

---

---

---

---

---

---

23) Proposed borehole conditioning procedures. Conductor - The hole is drilled w/ air and casing is run in air. Apart from insuring  
the hole is clean via air circulation at TD, there are no other conditioning procedures. Fresh Water -The hole is drilled w/air and casing  
is run in air. Fill with KCl water once drilled to TD. Once casing is at setting depth, circulate a minimum of one hole volume prior to pumping cement.  
Coal - The hole is drilled w/air and casing is run in air. Once casing is at setting depth, the hole is filled w/ KCl water and a  
minimum of one hole volume is circulated prior to pumping cement. Intermediate - Once surface casing is set and cemented Intermediate hole is drilled either on air or SOBm and filled w/ KCl water once  
drilled to TD. The well is conditioned with KCl circulation prior to running casing. Once casing is at setting depth, the well is circulated  
a minimum of one hole volume prior to pumping cement. Production - The hole is drilled with synthetic oil base mud and  
Once at TD, circulate at max allowable pump rate for at least 6x bottoms up. Once on bottom with casing, circulate a minimum of one hole volume prior to pumping cement.

---

---

---

---

---

---

---

---

\*Note: Attach additional sheets as needed.

Received

MAY 31 2013

Office of Oil and Gas 08/02/2013  
WV Dept. of Environmental Protection

STATE OF WEST VIRGINIA  
DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS

**CONSTRUCTION AND RECLAMATION PLAN AND SITE REGISTRATION APPLICATION FORM**  
**GENERAL PERMIT FOR OIL AND GAS PIT WASTE DISCHARGE**

Operator Name Noble Energy, Inc. OP Code 494501907

Watershed Wheeling Creek Quadrangle Majorsville

Elevation 1240' County Marshall District Webster

Description of anticipated Pit Waste: None - Closed loop system

Do you anticipate using more than 5,000 bbls of water to complete the proposed well work? Yes  No

Will a synthetic liner be used in the pit? Yes  If so, what mil.? 60 mil

Proposed Disposal Method For Treated Pit Wastes:

- Land Application
- Underground Injection ( UIC Permit Number \_\_\_\_\_ )
- Reuse (at API Number next anticipated well )
- Off Site Disposal (Supply form WW-9 for disposal location)
- Other (Explain \_\_\_\_\_)

Drilling medium anticipated for this well? Air, freshwater, oil based, etc. Top Hole to Intermediate Air/Bottom Hole Synthetic Oil Based Mud.

-If oil based, what type? Synthetic, petroleum, etc. Synthetic

Additives to be used? Bactericide, polymers, and weighting agents

Will closed loop system be used? Yes

Drill cuttings disposal method? Leave in pit, landfill, removed offsite, etc. All cuttings will be taken off site to an approved facility

-If left in pit and plan to solidify what medium will be used? Cement, lime,

-Landfill or offsite name/permit number? See attachment - Site Water/Cuttings Disposal

I certify that I understand and agree to the terms and conditions of the GENERAL WATER POLLUTION PERMIT issued on August 1, 2005, by the Office of Oil and Gas of the West Virginia Department of Environmental Protection. I understand that the provisions of the permit are enforceable by law. Violations of any term or condition of the general permit and/or other applicable law or regulation can lead to enforcement action.

I certify under penalty of law that I have personally examined and am familiar with the information submitted on this application form and all attachments thereto and that, based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine or imprisonment.

Company Official Signature Laura L. Adkins


Company Official (Typed Name) Laura Adkins

Company Official Title Regulatory Analyst


Subscribed and sworn before me this 13 day of MAY, 2013

MARIA A. YANNI / Maria A. Yanni Notary Public  
Office of Oil and Gas  
WV Dept. of Environmental Protection

My commission expires MAY 10, 2015

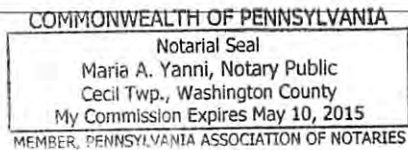

08/02/2013

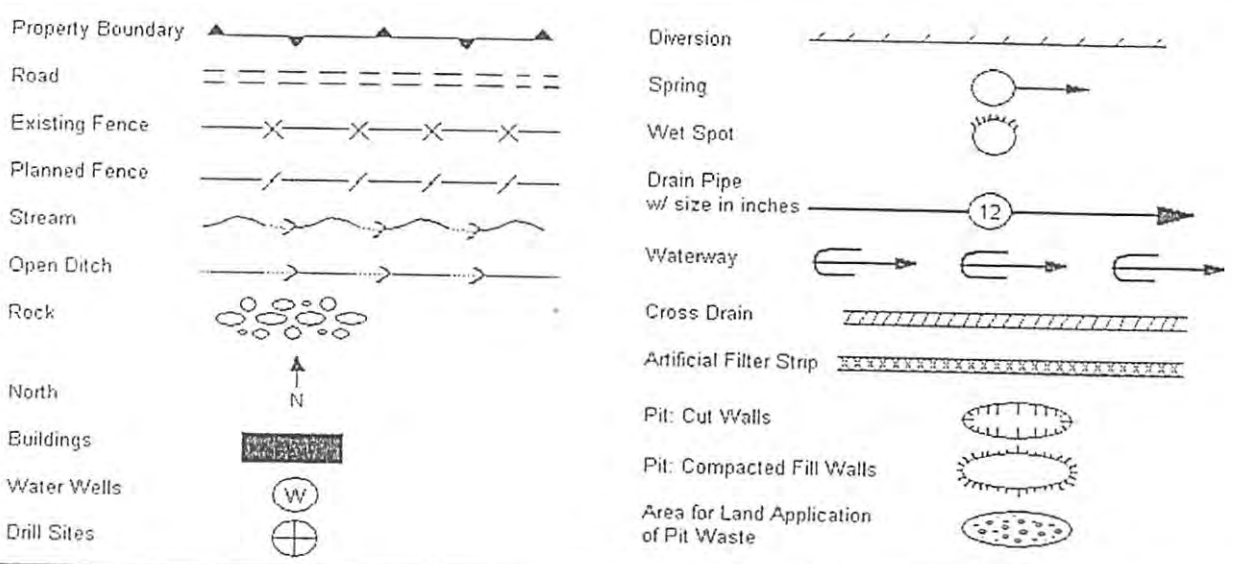

Proposed Revegetation Treatment: Acres Disturbed 19.2 Prevegetation pH \_\_\_\_\_

Lime 2 to 3 tons Tons/acre or to correct to pH \_\_\_\_\_

Fertilizer (10-20-20 or equivalent) 500 lbs/acre (500 lbs minimum)

Mulch hay or straw at 2 tons Tons/acre

Seed Mixtures

| Seed Type     | Area I | lbs/acre |
|---------------|--------|----------|
| Tall Fescue   |        | 40       |
| Ladino Clover |        | 5        |

| Seed Type     | Area II | lbs/acre |
|---------------|---------|----------|
| Tall Fescue   |         | 40       |
| Ladino Clover |         | 5        |

Attach:  
Drawing(s) of road, location, pit and proposed area for land application.

Photocopied section of involved 7.5' topographic sheet.

Plan Approved by: Bill Hendershot *[Signature]*

Comments: \_\_\_\_\_

Title: Oil and Gas Inspector

Date: 6-12-13

Field Reviewed?  Yes  No

RECEIVED  
Office of Oil and Gas

JUL 25 2013

WV Department of  
Environmental Protection

# Site Water/Cuttings Disposal

## Cuttings

### Haul off Company:

Eap Industries, Inc. DOT # 0876278  
1575 Smith Twp State Rd. Atlasburg PA 15004  
1-888-294-5227

### Disposal Locations:

Apex Environmental, LLC Permit # 06-08438  
11 County Road 78  
Amsterdam, OH 43903  
740-543-4389

Westmoreland Waste, LLC Permit # 100277  
111 Conner Lane  
Belle Vernon, PA 15012  
724-929-7694

Sycamore Landfill (Allied Waste) R30-07900105-2010  
4301 Sycamore Ridge Road  
Hurricane, WV 25526  
304-562-2611

## Water

### Haul off Company:

Dynamic Structures, Clear Creek DOT # 720485  
3790 State Route 7  
New Waterford, OH 44445  
330-892-0164

### Disposal Location:

Solidification  
Waste Management, Arden Landfill Permit # 100172  
200 Rangos Lane  
Washington, PA 15301  
724-225-1589

Solidification/Incineration  
Soil Remediation, Inc. Permit # 02-20753  
6065 Arrel-Smith Road  
Lowelville, OH 44436

Received

MAY 31 2013

Office of Oil and Gas  
WV Dept. of Environmental Protection

08/02/2013



## Water Management Plan: Primary Water Sources



WMP-01325

API/ID Number: 047-051-01659

Operator:

Noble Energy, Inc

WEB13DHS

### Important:

For each proposed primary water source (including source intakes for purchased water sources) identified in your water management plan, and summarized herein, DEP has made an evaluation concerning water availability over the specified date range. DEP's assessment is based on the following considerations:

- Statistical analysis of historical USGS stream gauge data (transferred to un-gauged locations as necessary);
- Identification of sensitive aquatic life (endangered species, mussels, etc.);
- Quantification of known existing demands on the water supply (Large Quantity Users);
- Minimum flows required by the Army Corps of Engineers; and
- Designated stream uses.

Based on these factors, DEP has provided, for each intake location (and origination point for purchased water), a reference gauge location and discharge flow reading which must be surpassed prior to withdrawals. Additionally, DEP has established a minimum passby flow at the withdrawal location which must also be surpassed prior to withdrawals. These thresholds are considered terms of the permit and are enforceable as such.

**DEP is aware that some intake points will be used for multiple wells and well sites. In these cases, the thresholds set by the Water Management Plan are to be interpreted as total withdrawal limits for each location over the specified date range regardless of how many wells are supported by that intake.**

For all purchased water intakes, determinations of water availability are made at the original source intake location. It is the responsibility of the Oil and Gas Operator, not the seller, to cease withdrawal of water from the seller when flows are less than the minimum gauge reading at the stream gauge referenced by the Water Management Plan in order to protect stream uses.

Note that the determinations made herein are based on the best available data, but it is impossible to predict water availability in the future. While the DEP has carefully established these minimum withdrawal thresholds, it remains the operator's responsibility to protect aquatic life at all times. Approval to withdrawal is contingent upon permission from the land owner. It is the responsibility of the operator to secure and maintain permission prior to any withdrawals.

The operator is reminded that 24-48 hours prior to withdrawing (or purchasing) water, DEP must be notified by email at [DEP.water.use@wv.gov](mailto:DEP.water.use@wv.gov).

**APPROVED JUL 25 2013**

## Source Summary

WMP- 01325

API Number:

047-051-01659

Operator:

Noble Energy, Inc

WEB13DHS

### Stream/River

● Source      **Wheeling Creek Pump Station 1 @ CNX Land Resources**      Marshall      Owner:      **Consol Energy**

|            |           |                    |                           |                  |                   |
|------------|-----------|--------------------|---------------------------|------------------|-------------------|
| Start Date | End Date  | Total Volume (gal) | Max. daily purchase (gal) | Intake Latitude: | Intake Longitude: |
| 9/17/2013  | 9/17/2014 | 5,000,000          |                           | 39.95205         | -80.56189         |

Regulated Stream?      Ref. Gauge ID:      3111955      Wheeling Creek near Majorville, WV

Max. Pump rate (gpm):      **1,000**      Min. Gauge Reading (cfs):      **18.23**      Min. Passby (cfs)      **16.63**

DEP Comments:

● Source      **Wheeling Creek Pump Station 2 @ CNX Land Resources**      Marshall      Owner:      **CNX Land Resources, Inc.**

|            |           |                    |                           |                  |                   |
|------------|-----------|--------------------|---------------------------|------------------|-------------------|
| Start Date | End Date  | Total Volume (gal) | Max. daily purchase (gal) | Intake Latitude: | Intake Longitude: |
| 9/17/2013  | 9/17/2014 | 4,000,000          |                           | 39.949578        | -80.531256        |

Regulated Stream?      Ref. Gauge ID:      3111955      Wheeling Creek near Majorville, WV

Max. Pump rate (gpm):      **1,000**      Min. Gauge Reading (cfs):      **18.23**      Min. Passby (cfs)      **16.24**

DEP Comments:

**08/02/2013**

## Source Summary

WMP-01325

API Number:

047-051-01659

Operator:

Noble Energy, Inc

WEB13DHS

## Purchased Water

● Source **West Virginia American Water - Weston Water Treatme** Lewis Owner: **West Virginia American Water**

| Start Date | End Date  | Total Volume (gal) | Max. daily purchase (gal) | Intake Latitude: | Intake Longitude: |
|------------|-----------|--------------------|---------------------------|------------------|-------------------|
| 9/17/2013  | 9/17/2014 | 7,000,000          | 500,000                   | -                | -                 |

Regulated Stream? Stonewall Jackson Dam Ref. Gauge ID: 3061000 WEST FORK RIVER AT ENTERPRISE, WV

Max. Pump rate (gpm): Min. Gauge Reading (cfs): **170.57** Min. Passby (cfs)

DEP Comments:

● Source **Bethlehem Water Department** Ohio Owner: **Bethlehem Water Department**

| Start Date | End Date  | Total Volume (gal) | Max. daily purchase (gal) | Intake Latitude: | Intake Longitude: |
|------------|-----------|--------------------|---------------------------|------------------|-------------------|
| 9/17/2013  | 9/17/2014 | 3,000,000          | 200,000                   | -                | -                 |

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm): Min. Gauge Reading (cfs): **6,468.00** Min. Passby (cfs)

DEP Comments: Bethlehem Water Department purchases all its water from the City of Wheeling. Thresholds are set based on the location of the City of Wheeling's raw water intake.

● Source **Wellsburg Water Department** Brooke Owner: **Wellsburg Water Department**

| Start Date | End Date  | Total Volume (gal) | Max. daily purchase (gal) | Intake Latitude: | Intake Longitude: |
|------------|-----------|--------------------|---------------------------|------------------|-------------------|
| 9/17/2013  | 9/17/2014 | 3,000,000          | 200,000                   | -                | -                 |

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm): Min. Gauge Reading (cfs): **6,468.00** Min. Passby (cfs)

DEP Comments: This alluvial groundwater well is, to some extent, under the influence of the Ohio River. Please adhere to stated minimum flow requirements on the Ohio River for withdrawals. <http://www.erh.noaa.gov/er/ohrfc/flows.shtml>

**08/02/2013**



Source **Moundsville Water Board** Marshall Owner: **Moundsville Water Treatment Plant**

Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude:  
9/17/2013 9/17/2014 3,000,000 2,000,000 - -

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm): Min. Gauge Reading (cfs): **6,468.00** Min. Passby (cfs)

DEP Comments: This alluvial groundwater well is, to some extent, under the influence of the Ohio River. Please adhere to stated minimum flow requirements on the Ohio River for withdrawals. <http://www.erh.noaa.gov/er/ohrfc/flows.shtml>

Source **Dean's Water Service** Ohio Owner: **Dean's Water Service**

Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude:  
9/17/2013 9/17/2014 3,000,000 600,000 - -

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm): Min. Gauge Reading (cfs): **6,468.00** Min. Passby (cfs)

DEP Comments:

Source **Wheeling Water Department** Ohio Owner: **Wheeling Water Department**

Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude:  
9/17/2013 9/17/2014 5,400,000 17,500 - -

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm): Min. Gauge Reading (cfs): **6,468.00** Min. Passby (cfs)

DEP Comments: Refer to the specified sation on the National Weather Service's Ohio River forecasts at the following website: <http://www.erh.noaa.gov/ohrfc//flows.shtml>

08/02/2013

Source **Ohio County PSD** Ohio Owner: **Ohio county PSD**

|            |           |                    |                           |                  |                   |
|------------|-----------|--------------------|---------------------------|------------------|-------------------|
| Start Date | End Date  | Total Volume (gal) | Max. daily purchase (gal) | Intake Latitude: | Intake Longitude: |
| 9/17/2013  | 9/17/2014 | 3,000,000          | 720,000                   | -                | -                 |

Regulated Stream? **Ohio River Min. Flow** Ref. Gauge ID: **9999999** **Ohio River Station: Willow Island Lock & Dam**

**Max. Pump rate (gpm):** **Min. Gauge Reading (cfs): 6,468.00** **Min. Passby (cfs)**

DEP Comments: **Refer to the specified station on the National Weather Service's Ohio River forecast website: <http://www.erh.noaa.gov/ohrfc//flows.shtml>**

**08/02/2013**

### Source Summary

WMP- 01325

API Number:

047-051-01659

Operator:

Noble Energy, Inc

WEB13DHS

## Ground Water

Source **Shoemaker Groundwater Well #3** Marshall Owner: **Consol Energy**

|            |           |                    |                           |                  |                   |
|------------|-----------|--------------------|---------------------------|------------------|-------------------|
| Start Date | End Date  | Total Volume (gal) | Max. daily purchase (gal) | Intake Latitude: | Intake Longitude: |
| 9/17/2013  | 9/17/2014 | 288,000            |                           | 40.0222          | -80.73389         |

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm): **800** Min. Gauge Reading (cfs): **6,468.00** Min. Passby (cfs)

DEP Comments: This alluvial groundwater well is, to some extent, under the influence of the Ohio River. Please adhere to stated minimum flow requirements on the Ohio River for withdrawals. <http://www.erh.noaa.gov/er/ohrfc/flows.shtml>

Source **Shoemaker Groundwater Well #4** Marshall Owner: **Consol Energy**

|            |           |                    |                           |                  |                   |
|------------|-----------|--------------------|---------------------------|------------------|-------------------|
| Start Date | End Date  | Total Volume (gal) | Max. daily purchase (gal) | Intake Latitude: | Intake Longitude: |
| 9/17/2013  | 9/17/2014 | 288,000            |                           | 40.022293        | -80.733586        |

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm): **800** Min. Gauge Reading (cfs): **6,468.00** Min. Passby (cfs)

DEP Comments: This alluvial groundwater well is, to some extent, under the influence of the Ohio River. Please adhere to stated minimum flow requirements on the Ohio River for withdrawals. <http://www.erh.noaa.gov/er/ohrfc/flows.shtml>

Source **Shoemaker Groundwater Well #5** Marshall Owner: **Consol Energy**

|            |           |                    |                           |                  |                   |
|------------|-----------|--------------------|---------------------------|------------------|-------------------|
| Start Date | End Date  | Total Volume (gal) | Max. daily purchase (gal) | Intake Latitude: | Intake Longitude: |
| 9/17/2013  | 9/17/2014 | 288,000            |                           | 40.021256        | -80.734568        |

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm): **800** Min. Gauge Reading (cfs): **6,468.00** Min. Passby (cfs)

DEP Comments: This alluvial groundwater well is, to some extent, under the influence of the Ohio River. Please adhere to stated minimum flow requirements on the Ohio River for withdrawals. <http://www.erh.noaa.gov/er/ohrfc/flows.shtml>

08/02/2013

Source **Shoemaker Groundwater Well #6** Marshall Owner: **Consol Energy**

|            |           |                    |                           |                  |                   |
|------------|-----------|--------------------|---------------------------|------------------|-------------------|
| Start Date | End Date  | Total Volume (gal) | Max. daily purchase (gal) | Intake Latitude: | Intake Longitude: |
| 9/17/2013  | 9/17/2014 | 288,000            |                           | 40.02076         | -80.73397         |

Regulated Stream? **Ohio River Min. Flow** Ref. Gauge ID: **9999999** **Ohio River Station: Willow Island Lock & Dam**

**Max. Pump rate (gpm): 800** **Min. Gauge Reading (cfs): 6,468.00** **Min. Passby (cfs)**

DEP Comments: **This alluvial groundwater well is, to some extent, under the influence of the Ohio River. Please adhere to stated minimum flow requirements on the Ohio River for withdrawals. <http://www.erh.noaa.gov/er/ohrfc/flows.shtml>**

**08/02/2013**

## Source Detail

WMP-01325

API/ID Number: 047-051-01659

Operator: Noble Energy, Inc

WEB13DHS

Source ID: 20366 Source Name Shoemaker Groundwater Well #3  
Consol Energy

Source Latitude: 40.0222  
Source Longitude: -80.73389

HUC-8 Code: 5030106

Drainage Area (sq. mi.): 25000 County: Marshall

Anticipated withdrawal start date: 9/17/2013

Anticipated withdrawal end date: 9/17/2014

Endangered Species?  Mussel Stream?

Total Volume from Source (gal): 288,000

Trout Stream?  Tier 3?

Max. Pump rate (gpm): 800

Regulated Stream? Ohio River Min. Flow

Max. Simultaneous Trucks:

Proximate PSD?

Max. Truck pump rate (gpm):

Gauged Stream?


Reference Gaug 9999999 Ohio River Station: Willow Island Lock & Dam

Drainage Area (sq. mi.) 25,000.00

Gauge Threshold (cfs): 6468

| Month | Median monthly flow (cfs) | Threshold (+ pump) | Estimated Available water (cfs) |
|-------|---------------------------|--------------------|---------------------------------|
| 1     | 45,700.00                 | -                  | -                               |
| 2     | 49,200.00                 | -                  | -                               |
| 3     | 65,700.00                 | -                  | -                               |
| 4     | 56,100.00                 | -                  | -                               |
| 5     | 38,700.00                 | -                  | -                               |
| 6     | 24,300.00                 | -                  | -                               |
| 7     | 16,000.00                 | -                  | -                               |
| 8     | 13,400.00                 | -                  | -                               |
| 9     | 12,800.00                 | -                  | -                               |
| 10    | 15,500.00                 | -                  | -                               |
| 11    | 26,300.00                 | -                  | -                               |
| 12    | 41,300.00                 | -                  | -                               |

### Water Availability Profile

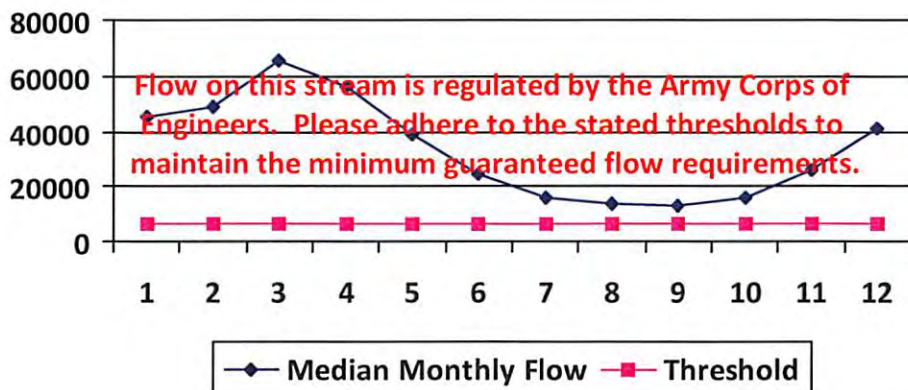

### Water Availability Assessment of Location

Base Threshold (cfs): -

Upstream Demand (cfs): 0.00

Downstream Demand (cfs): 0.00

Pump rate (cfs): 1.78

Headwater Safety (cfs): 0.00

Ungauged Stream Safety (cfs): 0.00

Min. Gauge Reading (cfs): -

Passby at Location (cfs): -

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

08/02/2013

### Source Detail

WMP- 01325

API/ID Number: 047-051-01659

Operator:

Noble Energy, Inc

WEB13DHS

Source ID: 20367 Source Name Shoemaker Groundwater Well #4  
Consol Energy

Source Latitude: 40.022293  
Source Longitude: -80.733586

HUC-8 Code: 5030106

Drainage Area (sq. mi.): 25000 County: Marshall

Anticipated withdrawal start date: 9/17/2013

Anticipated withdrawal end date: 9/17/2014

Endangered Species?  Mussel Stream?

Total Volume from Source (gal): 288,000

Trout Stream?  Tier 3?

Max. Pump rate (gpm): 800

Regulated Stream? Ohio River Min. Flow

Max. Simultaneous Trucks:

Proximate PSD?

Max. Truck pump rate (gpm)

Gauged Stream?


Reference Gaug 9999999 Ohio River Station: Willow Island Lock & Dam

Drainage Area (sq. mi.) 25,000.00

Gauge Threshold (cfs): 6468

| Month | Median monthly flow (cfs) | Threshold (+ pump) | Estimated Available water (cfs) |
|-------|---------------------------|--------------------|---------------------------------|
| 1     | 45,700.00                 | -                  | -                               |
| 2     | 49,200.00                 | -                  | -                               |
| 3     | 65,700.00                 | -                  | -                               |
| 4     | 56,100.00                 | -                  | -                               |
| 5     | 38,700.00                 | -                  | -                               |
| 6     | 24,300.00                 | -                  | -                               |
| 7     | 16,000.00                 | -                  | -                               |
| 8     | 13,400.00                 | -                  | -                               |
| 9     | 12,800.00                 | -                  | -                               |
| 10    | 15,500.00                 | -                  | -                               |
| 11    | 26,300.00                 | -                  | -                               |
| 12    | 41,300.00                 | -                  | -                               |

### Water Availability Profile

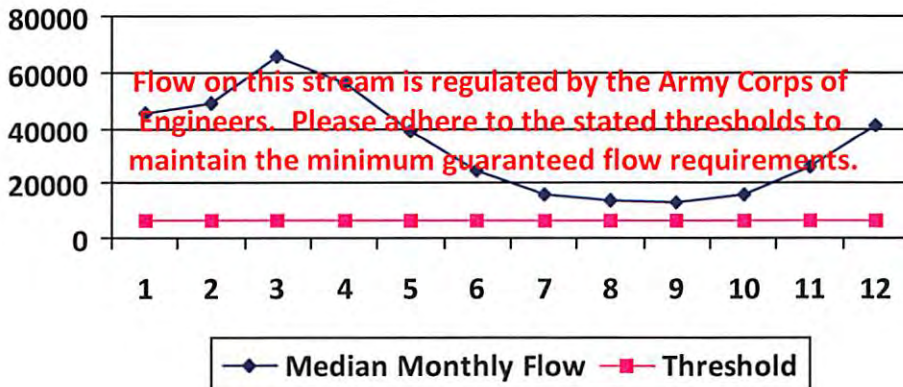

#### Water Availability Assessment of Location

|                               |      |
|-------------------------------|------|
| Base Threshold (cfs):         | -    |
| Upstream Demand (cfs):        | 0.00 |
| Downstream Demand (cfs):      | 0.00 |
| Pump rate (cfs):              | 1.78 |
| Headwater Safety (cfs):       | 0.00 |
| Ungauged Stream Safety (cfs): | 0.00 |
| Min. Gauge Reading (cfs):     | -    |
| Passby at Location (cfs):     | -    |

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

08/02/2013

## Source Detail

WMP-01325

API/ID Number: 047-051-01659

Operator: Noble Energy, Inc


WEB13DHS

|   |   |                            |  |
|---|---|----------------------------|--|
| Source ID: 20368                                      | Source Name: Shoemaker Groundwater Well #5<br>Consol Energy | Source Latitude: 40.021256 | Source Longitude: -80.734568                 |
| HUC-8 Code: 5030106                                   | Drainage Area (sq. mi.): 25000                              | County: Marshall           | Anticipated withdrawal start date: 9/17/2013 |
| <input type="checkbox"/> Endangered Species?          | <input type="checkbox"/> Mussel Stream?                     |                            | Anticipated withdrawal end date: 9/17/2014   |
| <input type="checkbox"/> Trout Stream?                | <input type="checkbox"/> Tier 3?                            |                            | Total Volume from Source (gal): 288,000      |
| <input checked="" type="checkbox"/> Regulated Stream? | Ohio River Min. Flow  |                            | Max. Pump rate (gpm): 800                    |
| <input type="checkbox"/> Proximate PSD?               |   |                            | Max. Simultaneous Trucks:                    |
| <input checked="" type="checkbox"/> Gauged Stream?    |   |                            | Max. Truck pump rate (gpm):                  |

|                                    |  |
|------------------------------------|--|
| Reference Gaug: 9999999            | Ohio River Station: Willow Island Lock & Dam |
| Drainage Area (sq. mi.): 25,000.00 | Gauge Threshold (cfs): 6468                  |

| Month | Median monthly flow (cfs) | Threshold (+ pump) | Estimated Available water (cfs) |
|-------|---------------------------|--------------------|---------------------------------|
| 1     | 45,700.00                 | -                  | -                               |
| 2     | 49,200.00                 | -                  | -                               |
| 3     | 65,700.00                 | -                  | -                               |
| 4     | 56,100.00                 | -                  | -                               |
| 5     | 38,700.00                 | -                  | -                               |
| 6     | 24,300.00                 | -                  | -                               |
| 7     | 16,000.00                 | -                  | -                               |
| 8     | 13,400.00                 | -                  | -                               |
| 9     | 12,800.00                 | -                  | -                               |
| 10    | 15,500.00                 | -                  | -                               |
| 11    | 26,300.00                 | -                  | -                               |
| 12    | 41,300.00                 | -                  | -                               |

### Water Availability Profile

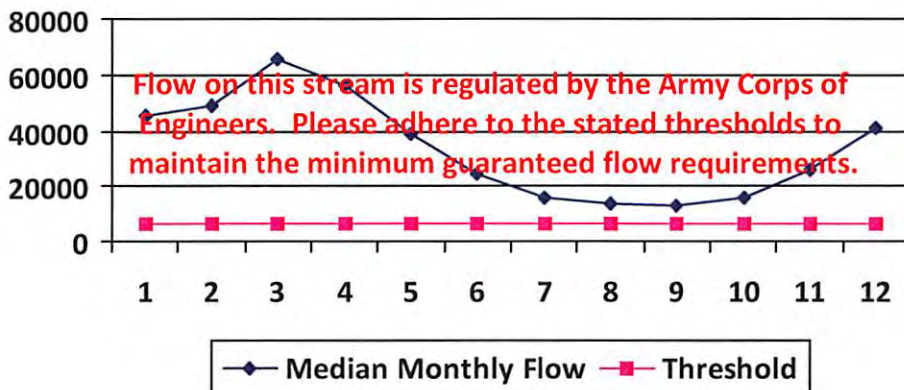

#### Water Availability Assessment of Location

|                               |      |
|-------------------------------|------|
| Base Threshold (cfs):         | -    |
| Upstream Demand (cfs):        | 0.00 |
| Downstream Demand (cfs):      | 0.00 |
| Pump rate (cfs):              | 1.78 |
| Headwater Safety (cfs):       | 0.00 |
| Ungauged Stream Safety (cfs): | 0.00 |

---

|                           |   |
|---------------------------|---|
| Min. Gauge Reading (cfs): | - |
| Passby at Location (cfs): | - |

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

08/02/2013

## Source Detail

WMP- 01325

API/ID Number: 047-051-01659

Operator: Noble Energy, Inc

WEB13DHS

Source ID: 20369 Source Name: Shoemaker Groundwater Well #6  
Consol Energy

Source Latitude: 40.02076

Source Longitude: -80.73397

HUC-8 Code: 5030106

Drainage Area (sq. mi.): 25000 County: Marshall

Anticipated withdrawal start date: 9/17/2013

Anticipated withdrawal end date: 9/17/2014

Endangered Species?  Mussel Stream?

Trout Stream?  Tier 3?

Regulated Stream? Ohio River Min. Flow

Proximate PSD?

Gauged Stream?

Total Volume from Source (gal): 288,000

Max. Pump rate (gpm): 800

Max. Simultaneous Trucks:

Max. Truck pump rate (gpm)


Reference Gaug: 9999999 Ohio River Station: Willow Island Lock & Dam

Drainage Area (sq. mi.): 25,000.00

Gauge Threshold (cfs): 6468

| Month | Median monthly flow (cfs) | Threshold (+ pump) | Estimated Available water (cfs) |
|-------|---------------------------|--------------------|---------------------------------|
| 1     | 45,700.00                 | -                  | -                               |
| 2     | 49,200.00                 | -                  | -                               |
| 3     | 65,700.00                 | -                  | -                               |
| 4     | 56,100.00                 | -                  | -                               |
| 5     | 38,700.00                 | -                  | -                               |
| 6     | 24,300.00                 | -                  | -                               |
| 7     | 16,000.00                 | -                  | -                               |
| 8     | 13,400.00                 | -                  | -                               |
| 9     | 12,800.00                 | -                  | -                               |
| 10    | 15,500.00                 | -                  | -                               |
| 11    | 26,300.00                 | -                  | -                               |
| 12    | 41,300.00                 | -                  | -                               |

### Water Availability Profile

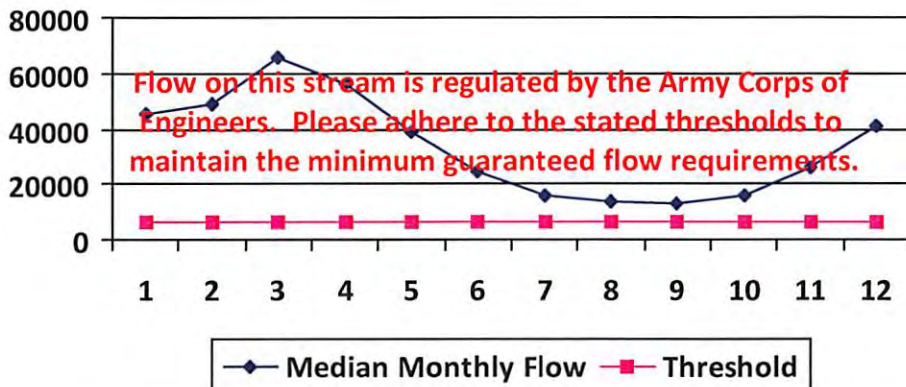

### Water Availability Assessment of Location

Base Threshold (cfs): -

Upstream Demand (cfs): 0.00

Downstream Demand (cfs): 0.00

Pump rate (cfs): 1.78

Headwater Safety (cfs): 0.00

Ungauged Stream Safety (cfs): 0.00

Min. Gauge Reading (cfs): -

Passby at Location (cfs): -

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

08/02/2013



## Source Detail

WMP- 01325

API/ID Number: 047-051-01659

Operator:

Noble Energy, Inc

WEB13DHS

Source ID: 20370 Source Name: West Virginia American Water - Weston Water Treat  
West Virginia American Water

Source Latitude: -

Source Longitude: -

HUC-8 Code: 5020002

Drainage Area (sq. mi.): 104.83 County: Lewis

Anticipated withdrawal start date: 9/17/2013

Anticipated withdrawal end date: 9/17/2014

Endangered Species?  Mussel Stream?

Trout Stream?  Tier 3?

Total Volume from Source (gal): 7,000,000

Regulated Stream? Stonewall Jackson Dam

Max. Pump rate (gpm):

Proximate PSD? Weston WTP

Max. Simultaneous Trucks:

Gauged Stream?

Max. Truck pump rate (gpm)


Reference Gaug 3061000 WEST FORK RIVER AT ENTERPRISE, WV

Drainage Area (sq. mi.) 759.00

Gauge Threshold (cfs): 234

| Month | Median monthly flow (cfs) | Threshold (+ pump) | Estimated Available water (cfs) |
|-------|---------------------------|--------------------|---------------------------------|
| 1     | 321.23                    | -                  | -                               |
| 2     | 361.67                    | -                  | -                               |
| 3     | 465.85                    | -                  | -                               |
| 4     | 266.43                    | -                  | -                               |
| 5     | 273.47                    | -                  | -                               |
| 6     | 137.03                    | -                  | -                               |
| 7     | 88.78                     | -                  | -                               |
| 8     | 84.77                     | -                  | -                               |
| 9     | 58.98                     | -                  | -                               |
| 10    | 57.83                     | -                  | -                               |
| 11    | 145.12                    | -                  | -                               |
| 12    | 247.76                    | -                  | -                               |

### Water Availability Profile

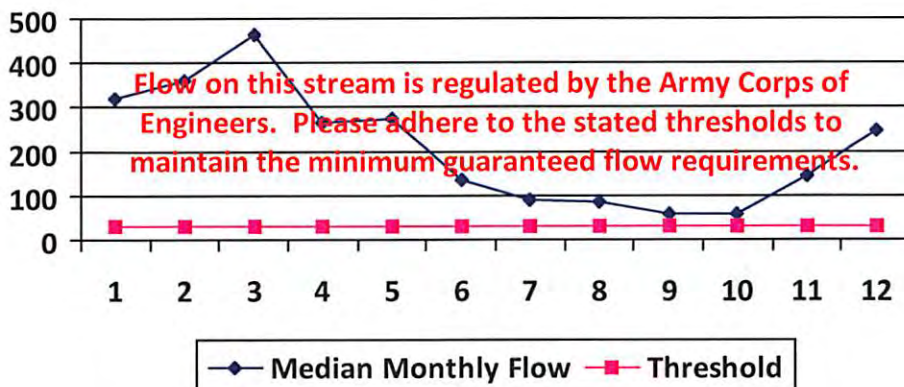

### Water Availability Assessment of Location

|                               |       |
|-------------------------------|-------|
| Base Threshold (cfs):         | -     |
| Upstream Demand (cfs):        | 24.32 |
| Downstream Demand (cfs):      | 0.00  |
| Pump rate (cfs):              |       |
| Headwater Safety (cfs):       | 8.08  |
| Ungauged Stream Safety (cfs): | 0.00  |
| Min. Gauge Reading (cfs):     | -     |
| Passby at Location (cfs):     | -     |

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

08/02/2013

## Source Detail

WMP-01325      API/ID Number: 047-051-01659      Operator: Noble Energy, Inc  
 WEB13DHS

Source ID: 20371    Source Name: Bethlehem Water Department    Source Latitude: -  
 Bethlehem Water Department    Source Longitude: -

HUC-8 Code: 5030106


Drainage Area (sq. mi.): 25000    County: Ohio    Anticipated withdrawal start date: 9/17/2013  
 Anticipated withdrawal end date: 9/17/2014

Endangered Species?     Mussel Stream?  
 Trout Stream?     Tier 3?  
 Regulated Stream?    Ohio River Min. Flow    Total Volume from Source (gal): 3,000,000  
 Proximate PSD?    City of Wheeling    Max. Pump rate (gpm):  
 Gauged Stream?    Max. Simultaneous Trucks:  
 Max. Truck pump rate (gpm):

Reference Gaug: 9999999    Ohio River Station: Willow Island Lock & Dam  
 Drainage Area (sq. mi.): 25,000.00    Gauge Threshold (cfs): 6468

| Month | Median monthly flow (cfs) | Threshold (+ pump) | Estimated Available water (cfs) |
|-------|---------------------------|--------------------|---------------------------------|
| 1     | 45,700.00                 | -                  | -                               |
| 2     | 49,200.00                 | -                  | -                               |
| 3     | 65,700.00                 | -                  | -                               |
| 4     | 56,100.00                 | -                  | -                               |
| 5     | 38,700.00                 | -                  | -                               |
| 6     | 24,300.00                 | -                  | -                               |
| 7     | 16,000.00                 | -                  | -                               |
| 8     | 13,400.00                 | -                  | -                               |
| 9     | 12,800.00                 | -                  | -                               |
| 10    | 15,500.00                 | -                  | -                               |
| 11    | 26,300.00                 | -                  | -                               |
| 12    | 41,300.00                 | -                  | -                               |

### Water Availability Profile

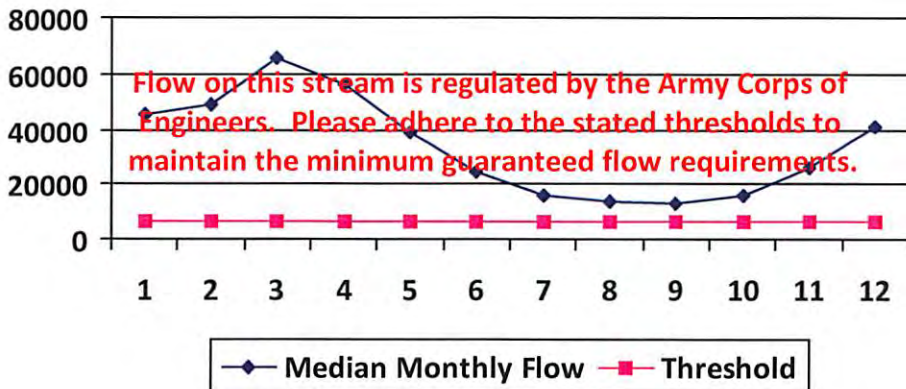

### Water Availability Assessment of Location

Base Threshold (cfs): -

Upstream Demand (cfs):

Downstream Demand (cfs):

Pump rate (cfs):

Headwater Safety (cfs): 0.00

Ungauged Stream Safety (cfs): 0.00

---

Min. Gauge Reading (cfs): -

Passby at Location (cfs): -

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

08/02/2013

## Source Detail

WMP-01325

API/ID Number: 047-051-01659

Operator:

Noble Energy, Inc

WEB13DHS

Source ID: 20372 Source Name Wellsburg Water Department  
Wellsburg Water Department

Source Latitude: -  
Source Longitude: -

HUC-8 Code: 5030106

Drainage Area (sq. mi.): 25000 County: Brooke

Anticipated withdrawal start date: 9/17/2013

Anticipated withdrawal end date: 9/17/2014

Endangered Species?  Mussel Stream?

Total Volume from Source (gal): 3,000,000

Trout Stream?

Tier 3?

Regulated Stream? Ohio River Min. Flow

Max. Pump rate (gpm):

Proximate PSD? Wellsburg Water Department

Max. Simultaneous Trucks:

Gauged Stream?

Max. Truck pump rate (gpm):


Reference Gaug 9999999 Ohio River Station: Willow Island Lock & Dam

Drainage Area (sq. mi.) 25,000.00

Gauge Threshold (cfs): 6468

| Month | Median monthly flow (cfs) | Threshold (+ pump) | Estimated Available water (cfs) |
|-------|---------------------------|--------------------|---------------------------------|
| 1     | 45,700.00                 | -                  | -                               |
| 2     | 49,200.00                 | -                  | -                               |
| 3     | 65,700.00                 | -                  | -                               |
| 4     | 56,100.00                 | -                  | -                               |
| 5     | 38,700.00                 | -                  | -                               |
| 6     | 24,300.00                 | -                  | -                               |
| 7     | 16,000.00                 | -                  | -                               |
| 8     | 13,400.00                 | -                  | -                               |
| 9     | 12,800.00                 | -                  | -                               |
| 10    | 15,500.00                 | -                  | -                               |
| 11    | 26,300.00                 | -                  | -                               |
| 12    | 41,300.00                 | -                  | -                               |

### Water Availability Profile

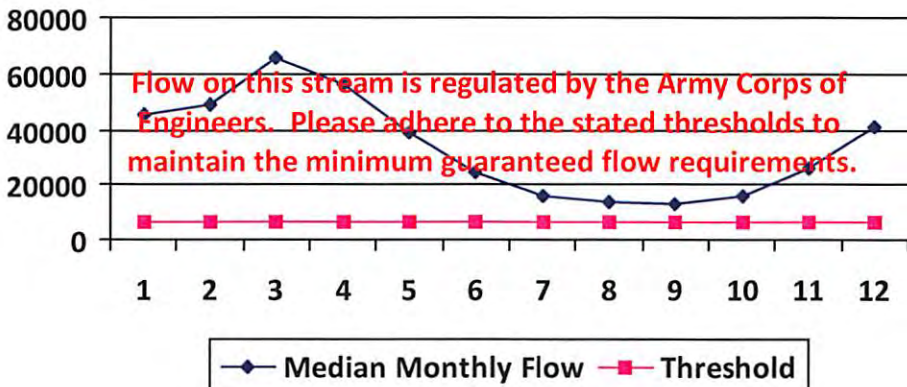

### Water Availability Assessment of Location

Base Threshold (cfs): -

Upstream Demand (cfs):

Downstream Demand (cfs):

Pump rate (cfs):

Headwater Safety (cfs): 0.00

Ungauged Stream Safety (cfs): 0.00

---

Min. Gauge Reading (cfs): -

Passby at Location (cfs): -

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

08/02/2013

## Source Detail

WMP-01325

API/ID Number: 047-051-01659

Operator: Noble Energy, Inc


WEB13DHS

|   |   |  |  |
|---|---|--|--|
| Source ID: 20373                                      | Source Name: Moundsville Water Board<br>Moundsville Water Treatment Plant | Source Latitude: -                           | Source Longitude: -                        |
| HUC-8 Code: 5030106                                   | Drainage Area (sq. mi.): 25000 County: Marshall                           | Anticipated withdrawal start date: 9/17/2013 | Anticipated withdrawal end date: 9/17/2014 |
| <input type="checkbox"/> Endangered Species?          | <input checked="" type="checkbox"/> Mussel Stream?                        | Total Volume from Source (gal): 3,000,000    |  |
| <input type="checkbox"/> Trout Stream?                | <input type="checkbox"/> Tier 3?  | Max. Pump rate (gpm):                        |  |
| <input checked="" type="checkbox"/> Regulated Stream? | Ohio River Min. Flow  | Max. Simultaneous Trucks:                    |  |
| <input type="checkbox"/> Proximate PSD?               |   | Max. Truck pump rate (gpm):                  |  |
| <input checked="" type="checkbox"/> Gauged Stream?    |   |  |  |

|                                    |  |
|------------------------------------|--|
| Reference Gaug: 9999999            | Ohio River Station: Willow Island Lock & Dam |
| Drainage Area (sq. mi.): 25,000.00 | Gauge Threshold (cfs): 6468                  |

| Month | Median monthly flow (cfs) | Threshold (+ pump) | Estimated Available water (cfs) |
|-------|---------------------------|--------------------|---------------------------------|
| 1     | 45,700.00                 | -                  | -                               |
| 2     | 49,200.00                 | -                  | -                               |
| 3     | 65,700.00                 | -                  | -                               |
| 4     | 56,100.00                 | -                  | -                               |
| 5     | 38,700.00                 | -                  | -                               |
| 6     | 24,300.00                 | -                  | -                               |
| 7     | 16,000.00                 | -                  | -                               |
| 8     | 13,400.00                 | -                  | -                               |
| 9     | 12,800.00                 | -                  | -                               |
| 10    | 15,500.00                 | -                  | -                               |
| 11    | 26,300.00                 | -                  | -                               |
| 12    | 41,300.00                 | -                  | -                               |

### Water Availability Profile

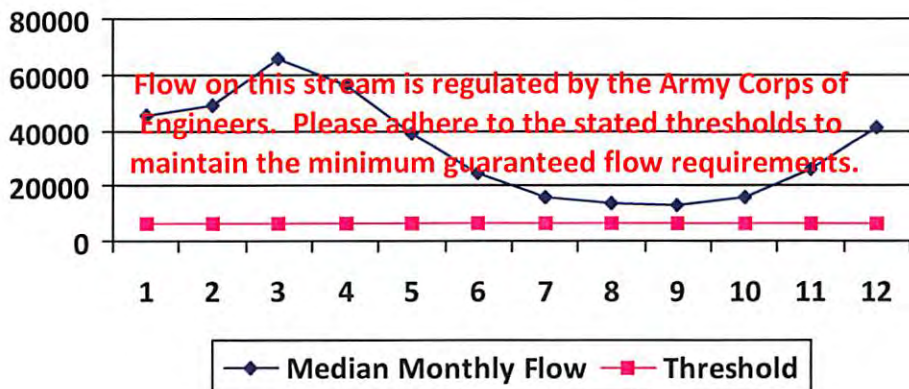

### Water Availability Assessment of Location

|                               |      |
|-------------------------------|------|
| Base Threshold (cfs):         | -    |
| Upstream Demand (cfs):        | -    |
| Downstream Demand (cfs):      | -    |
| Pump rate (cfs):              | -    |
| Headwater Safety (cfs):       | 0.00 |
| Ungauged Stream Safety (cfs): | 0.00 |
| <hr/>                         |      |
| Min. Gauge Reading (cfs):     | -    |
| Passby at Location (cfs):     | -    |

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

08/02/2013

### Source Detail

WMP- 01325      API/ID Number: 047-051-01659      Operator: Noble Energy, Inc  
 WEB13DHS

Source ID: 20374    Source Name: Dean's Water Service    Source Latitude: -  
 Dean's Water Service    Source Longitude: -

HUC-8 Code: 5030106    Anticipated withdrawal start date: 9/17/2013  
 Drainage Area (sq. mi.): 25000    County: Ohio    Anticipated withdrawal end date: 9/17/2014  
 Total Volume from Source (gal): 3,000,000


Endangered Species?     Mussel Stream?  
 Trout Stream?     Tier 3?  
 Regulated Stream?    Ohio River Min. Flow  
 Proximate PSD?  
 Gauged Stream?

Max. Pump rate (gpm):  
 Max. Simultaneous Trucks:  
 Max. Truck pump rate (gpm):

Reference Gaug 9999999    Ohio River Station: Willow Island Lock & Dam  
 Drainage Area (sq. mi.) 25,000.00    Gauge Threshold (cfs): 6468

| Month | Median monthly flow (cfs) | Threshold (+ pump) | Estimated Available water (cfs) |
|-------|---------------------------|--------------------|---------------------------------|
| 1     | 45,700.00                 | -                  | -                               |
| 2     | 49,200.00                 | -                  | -                               |
| 3     | 65,700.00                 | -                  | -                               |
| 4     | 56,100.00                 | -                  | -                               |
| 5     | 38,700.00                 | -                  | -                               |
| 6     | 24,300.00                 | -                  | -                               |
| 7     | 16,000.00                 | -                  | -                               |
| 8     | 13,400.00                 | -                  | -                               |
| 9     | 12,800.00                 | -                  | -                               |
| 10    | 15,500.00                 | -                  | -                               |
| 11    | 26,300.00                 | -                  | -                               |
| 12    | 41,300.00                 | -                  | -                               |

### Water Availability Profile

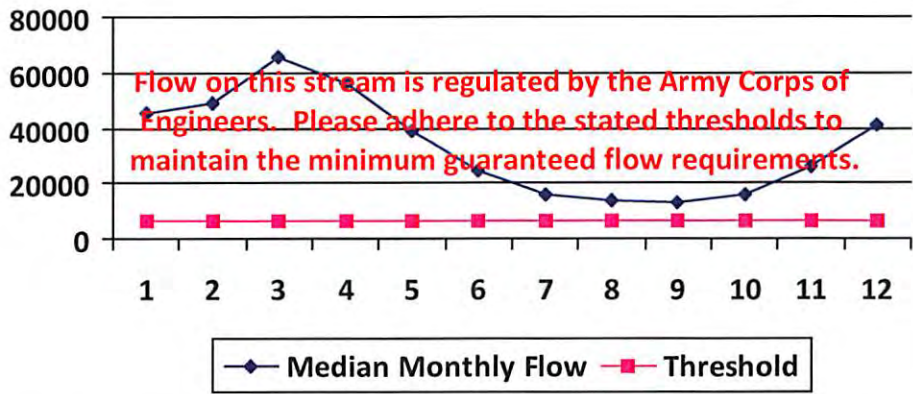

#### Water Availability Assessment of Location

Base Threshold (cfs): -

Upstream Demand (cfs): 0.00

Downstream Demand (cfs): 0.00

Pump rate (cfs):

Headwater Safety (cfs): 0.00

Ungauged Stream Safety (cfs): 0.00

---

Min. Gauge Reading (cfs): -

Passby at Location (cfs): -

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

08/02/2013

## Source Detail

WMP- 01325

API/ID Number: 047-051-01659

Operator: Noble Energy, Inc


WEB13DHS

|   |   |  |  |
|---|---|--|--|
| Source ID: 20376                                      | Source Name: Wheeling Water Department<br>Wheeling Water Department | Source Latitude: -                           | Source Longitude: -                        |
| HUC-8 Code: 5030106                                   | Drainage Area (sq. mi.): 25000 County: Ohio                         | Anticipated withdrawal start date: 9/17/2013 | Anticipated withdrawal end date: 9/17/2014 |
| <input type="checkbox"/> Endangered Species?          | <input checked="" type="checkbox"/> Mussel Stream?                  | Total Volume from Source (gal): 5,400,000    |  |
| <input type="checkbox"/> Trout Stream?                | <input type="checkbox"/> Tier 3?                                    | Max. Pump rate (gpm):                        |  |
| <input checked="" type="checkbox"/> Regulated Stream? | Ohio River Min. Flow  | Max. Simultaneous Trucks:                    |  |
| <input checked="" type="checkbox"/> Proximate PSD?    | Wheeling Water Department   | Max. Truck pump rate (gpm):                  |  |
| <input checked="" type="checkbox"/> Gauged Stream?    |   |  |  |

|                                    |  |
|------------------------------------|--|
| Reference Gaug: 9999999            | Ohio River Station: Willow Island Lock & Dam |
| Drainage Area (sq. mi.): 25,000.00 | Gauge Threshold (cfs): 6468                  |

| Month | Median monthly flow (cfs) | Threshold (+ pump) | Estimated Available water (cfs) |
|-------|---------------------------|--------------------|---------------------------------|
| 1     | 45,700.00                 | -                  | -                               |
| 2     | 49,200.00                 | -                  | -                               |
| 3     | 65,700.00                 | -                  | -                               |
| 4     | 56,100.00                 | -                  | -                               |
| 5     | 38,700.00                 | -                  | -                               |
| 6     | 24,300.00                 | -                  | -                               |
| 7     | 16,000.00                 | -                  | -                               |
| 8     | 13,400.00                 | -                  | -                               |
| 9     | 12,800.00                 | -                  | -                               |
| 10    | 15,500.00                 | -                  | -                               |
| 11    | 26,300.00                 | -                  | -                               |
| 12    | 41,300.00                 | -                  | -                               |

### Water Availability Profile

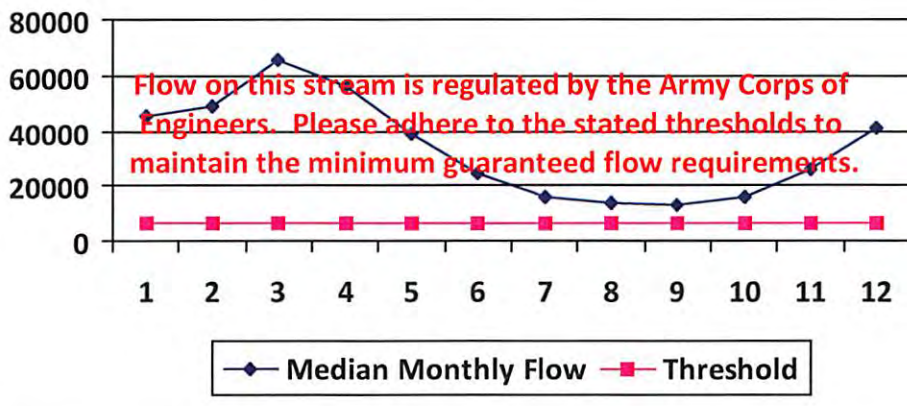

### Water Availability Assessment of Location

|                               |      |
|-------------------------------|------|
| Base Threshold (cfs):         | -    |
| Upstream Demand (cfs):        |      |
| Downstream Demand (cfs):      |      |
| Pump rate (cfs):              |      |
| Headwater Safety (cfs):       | 0.00 |
| Ungauged Stream Safety (cfs): | 0.00 |
| <hr/>                         |      |
| Min. Gauge Reading (cfs):     | -    |
| Passby at Location (cfs):     | -    |

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

08/02/2013

### Source Detail

WMP- 01325

API/ID Number: 047-051-01659

Operator:

Noble Energy, Inc

WEB13DHS

Source ID: 20377 Source Name Ohio County PSD  
Ohio county PSD

Source Latitude: -

Source Longitude: -

HUC-8 Code: 5030106

Drainage Area (sq. mi.): 25000 County: Ohio

Anticipated withdrawal start date: 9/17/2013

Anticipated withdrawal end date: 9/17/2014

Total Volume from Source (gal): 3,000,000

Max. Pump rate (gpm):

Max. Simultaneous Trucks:

Max. Truck pump rate (gpm)

- Endangered Species?  Mussel Stream?
- Trout Stream?  Tier 3?
- Regulated Stream? Ohio River Min. Flow
- Proximate PSD? Wheeling Water Department
- Gauged Stream?


Reference Gaug 9999999 Ohio River Station: Willow Island Lock & Dam

Drainage Area (sq. mi.) 25,000.00

Gauge Threshold (cfs): 6468

| Month | Median monthly flow (cfs) | Threshold (+ pump) | Estimated Available water (cfs) |
|-------|---------------------------|--------------------|---------------------------------|
| 1     | 45,700.00                 | -                  | -                               |
| 2     | 49,200.00                 | -                  | -                               |
| 3     | 65,700.00                 | -                  | -                               |
| 4     | 56,100.00                 | -                  | -                               |
| 5     | 38,700.00                 | -                  | -                               |
| 6     | 24,300.00                 | -                  | -                               |
| 7     | 16,000.00                 | -                  | -                               |
| 8     | 13,400.00                 | -                  | -                               |
| 9     | 12,800.00                 | -                  | -                               |
| 10    | 15,500.00                 | -                  | -                               |
| 11    | 26,300.00                 | -                  | -                               |
| 12    | 41,300.00                 | -                  | -                               |

### Water Availability Profile

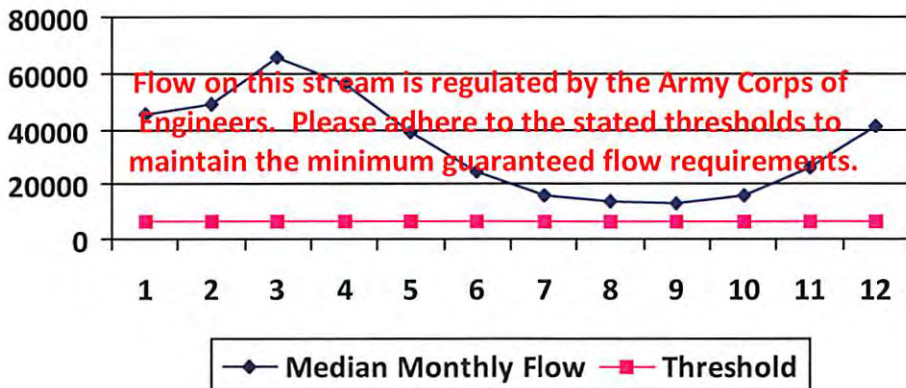

#### Water Availability Assessment of Location

Base Threshold (cfs): -

Upstream Demand (cfs):

Downstream Demand (cfs):

Pump rate (cfs):

Headwater Safety (cfs): 0.00

Ungauged Stream Safety (cfs): 0.00

---

Min. Gauge Reading (cfs): -

Passby at Location (cfs): -

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

08/02/2013

## Source Detail

WMP- 01325

API/ID Number: 047-051-01659

Operator:

Noble Energy, Inc

WEB13DHS

Source ID: 20364 Source Name: Wheeling Creek Pump Station 1 @ CNX Land Resour  
Consol Energy

Source Latitude: 39.95205  
Source Longitude: -80.56189

HUC-8 Code: 5030106

Drainage Area (sq. mi.): 156.06 County: Marshall

Anticipated withdrawal start date: 9/17/2013

Anticipated withdrawal end date: 9/17/2014

Endangered Species?  Mussel Stream?

Total Volume from Source (gal): 5,000,000

Trout Stream?  Tier 3?

Max. Pump rate (gpm): 1,000

Regulated Stream?

Max. Simultaneous Trucks: 0

Proximate PSD?

Max. Truck pump rate (gpm)

Gauged Stream?


Reference Gaug: 3111955 Wheeling Creek near Majorville, WV

Drainage Area (sq. mi.): 152.00

Gauge Threshold (cfs): 16

| Month | Median monthly flow (cfs) | Threshold (+ pump) | Estimated Available water (cfs) |
|-------|---------------------------|--------------------|---------------------------------|
| 1     | 0.00                      | 18.66              | -                               |
| 2     | 0.00                      | 18.66              | -                               |
| 3     | 0.00                      | 18.66              | -                               |
| 4     | 0.00                      | 18.66              | -                               |
| 5     | 0.00                      | 18.66              | -                               |
| 6     | 0.00                      | 18.66              | -                               |
| 7     | 0.00                      | 18.66              | -                               |
| 8     | 0.00                      | 18.66              | -                               |
| 9     | 0.00                      | 18.66              | -                               |
| 10    | 0.00                      | 18.66              | -                               |
| 11    | 0.00                      | 18.66              | -                               |
| 12    | 0.00                      | 18.66              | -                               |

### Water Availability Profile

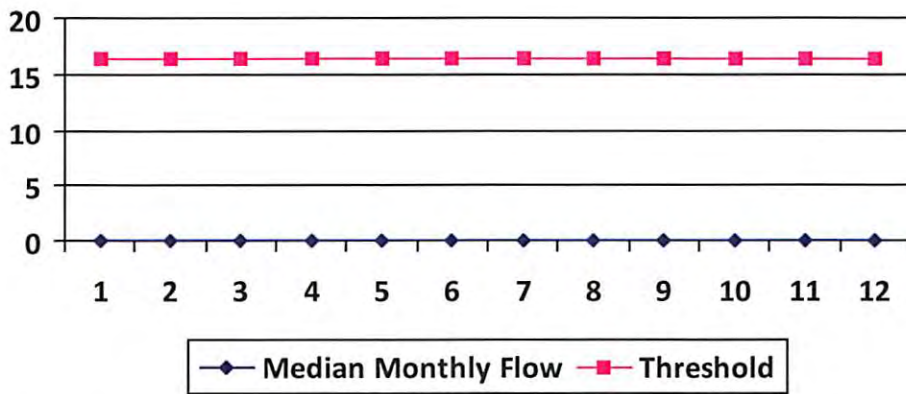

### Water Availability Assessment of Location

Base Threshold (cfs): 16.43

Upstream Demand (cfs): 0.00

Downstream Demand (cfs): 0.00

Pump rate (cfs): 2.23

Headwater Safety (cfs): 0.00

Ungauged Stream Safety (cfs): 0.00

Min. Gauge Reading (cfs): 18.23

Passby at Location (cfs): 16.43

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

08/02/2013



## Source Detail

WMP-01325

API/ID Number: 047-051-01659

Operator: Noble Energy, Inc

WEB13DHS

Source ID: 20365 Source Name: Wheeling Creek Pump Station 2 @ CNX Land Resour  
CNX Land Resources, Inc.

Source Latitude: 39.949578  
Source Longitude: -80.531256

HUC-8 Code: 5030106

Drainage Area (sq. mi.): 152.4 County: Marshall

Anticipated withdrawal start date: 9/17/2013

Anticipated withdrawal end date: 9/17/2014

Endangered Species?  Mussel Stream?

Total Volume from Source (gal): 4,000,000

Trout Stream?  Tier 3?

Max. Pump rate (gpm): 1,000

Regulated Stream?

Max. Simultaneous Trucks: 0

Proximate PSD?

Max. Truck pump rate (gpm)

Gauged Stream?


Reference Gaug: 3111955 Wheeling Creek near Majorsville, WV

Drainage Area (sq. mi.) 152.00

Gauge Threshold (cfs): 16

| Month | Median monthly flow (cfs) | Threshold (+ pump) | Estimated Available water (cfs) |
|-------|---------------------------|--------------------|---------------------------------|
| 1     | 0.00                      | 18.27              | -                               |
| 2     | 0.00                      | 18.27              | -                               |
| 3     | 0.00                      | 18.27              | -                               |
| 4     | 0.00                      | 18.27              | -                               |
| 5     | 0.00                      | 18.27              | -                               |
| 6     | 0.00                      | 18.27              | -                               |
| 7     | 0.00                      | 18.27              | -                               |
| 8     | 0.00                      | 18.27              | -                               |
| 9     | 0.00                      | 18.27              | -                               |
| 10    | 0.00                      | 18.27              | -                               |
| 11    | 0.00                      | 18.27              | -                               |
| 12    | 0.00                      | 18.27              | -                               |

### Water Availability Profile

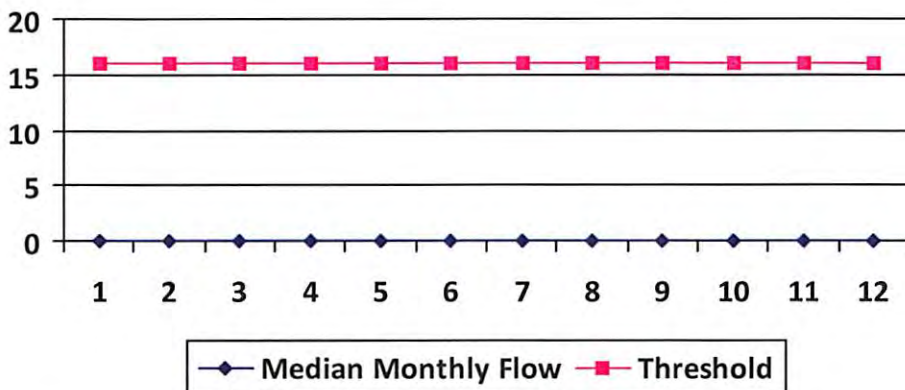

### Water Availability Assessment of Location

|                                  |              |
|----------------------------------|--------------|
| Base Threshold (cfs):            | 16.04        |
| Upstream Demand (cfs):           | 0.00         |
| Downstream Demand (cfs):         | 0.00         |
| Pump rate (cfs):                 | 2.23         |
| Headwater Safety (cfs):          | 0.00         |
| Ungauged Stream Safety (cfs):    | 0.00         |
| <b>Min. Gauge Reading (cfs):</b> | <b>18.23</b> |
| <b>Passby at Location (cfs):</b> | <b>16.04</b> |

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

08/02/2013



## Water Management Plan: Secondary Water Sources



WMP-01325

API/ID Number

047-051-01659

Operator:

Noble Energy, Inc

WEB13DHS

### Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

### Multi-site impoundment

|                           |           |                                 |                    |        |                    |           |
|---------------------------|-----------|---------------------------------|--------------------|--------|--------------------|-----------|
| Source ID:                | 20378     | Source Name                     | SHL #1 Impoundment |        | Source start date: | 9/17/2013 |
|                           |           |                                 |                    |        | Source end date:   | 9/17/2014 |
| Source Lat:               | 39.979696 | Source Long:                    | -80.579465         | County | Marshall           |           |
| Max. Daily Purchase (gal) |           | Total Volume from Source (gal): | 3,400,000          |        |                    |           |

DEP Comments:

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-200

**Important:**

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

|                  |                           |                                     |                                 |                    |           |
|------------------|---------------------------|-------------------------------------|---------------------------------|--------------------|-----------|
| Source ID: 20379 | Source Name               | SHL #2 Impoundment (WV51-WPC-00001) |                                 | Source start date: | 9/17/2013 |
|                  |                           |                                     |                                 | Source end date:   | 9/17/2014 |
|                  | Source Lat:               | 39.966973                           | Source Long:                    | -80.561377         | County    |
|                  |                           |                                     |                                 |                    | Marshall  |
|                  | Max. Daily Purchase (gal) |                                     | Total Volume from Source (gal): |                    | 4,100,000 |

DEP Comments:

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-201

|                  |                           |                                     |                                 |                    |           |
|------------------|---------------------------|-------------------------------------|---------------------------------|--------------------|-----------|
| Source ID: 20380 | Source Name               | SHL #3 Impoundment (WV51-WPC-00002) |                                 | Source start date: | 9/17/2013 |
|                  |                           |                                     |                                 | Source end date:   | 9/17/2014 |
|                  | Source Lat:               | 39.974133                           | Source Long:                    | -80.55527          | County    |
|                  |                           |                                     |                                 |                    | Marshall  |
|                  | Max. Daily Purchase (gal) |                                     | Total Volume from Source (gal): |                    | 4,300,000 |

DEP Comments:

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-202

**Important:**

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

|                           |             |                                     |            |                    |           |
|---------------------------|-------------|-------------------------------------|------------|--------------------|-----------|
| Source ID: 20381          | Source Name | SHL #4 Impoundment (WV51-WPC-00003) |            | Source start date: | 9/17/2013 |
|                           |             |                                     |            | Source end date:   | 9/17/2014 |
| Source Lat:               | 39.963284   | Source Long:                        | -80.562743 | County             | Marshall  |
| Max. Daily Purchase (gal) |             | Total Volume from Source (gal):     | 4,100,000  |                    |           |

DEP Comments:

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-204

**Purchased Water**

|                           |             |   |            |                    |           |
|---------------------------|-------------|---|------------|--------------------|-----------|
| Source ID: 20375          | Source Name | Bridgeport Ohio Water Department<br>Public Water Provider |            | Source start date: | 9/17/2013 |
|                           |             |   |            | Source end date:   | 9/17/2014 |
| Source Lat:               | 40.08348    | Source Long:  | -80.736488 | County             |           |
| Max. Daily Purchase (gal) | 200,000     | Total Volume from Source (gal):                           | 3,000,000  |                    |           |

DEP Comments: Please ensure that purchases from this source are approved by, and completed in accordance with, requirements set forth by the State of Ohio Department of Environmental Protection.

WMP- 01325

API/ID Number 047-051-01659

Operator:

Noble Energy, Inc

WEB13DHS

**Important:**

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

## Recycled Frac Water

Source ID: 20382 Source Name WEB13

Source start date: 9/17/2013

Source end date: 9/17/2014

Source Lat:

Source Long:

County


Max. Daily Purchase (gal)

Total Volume from Source (gal): 8,000,000


DEP Comments:


08/02/2013

SI-1659

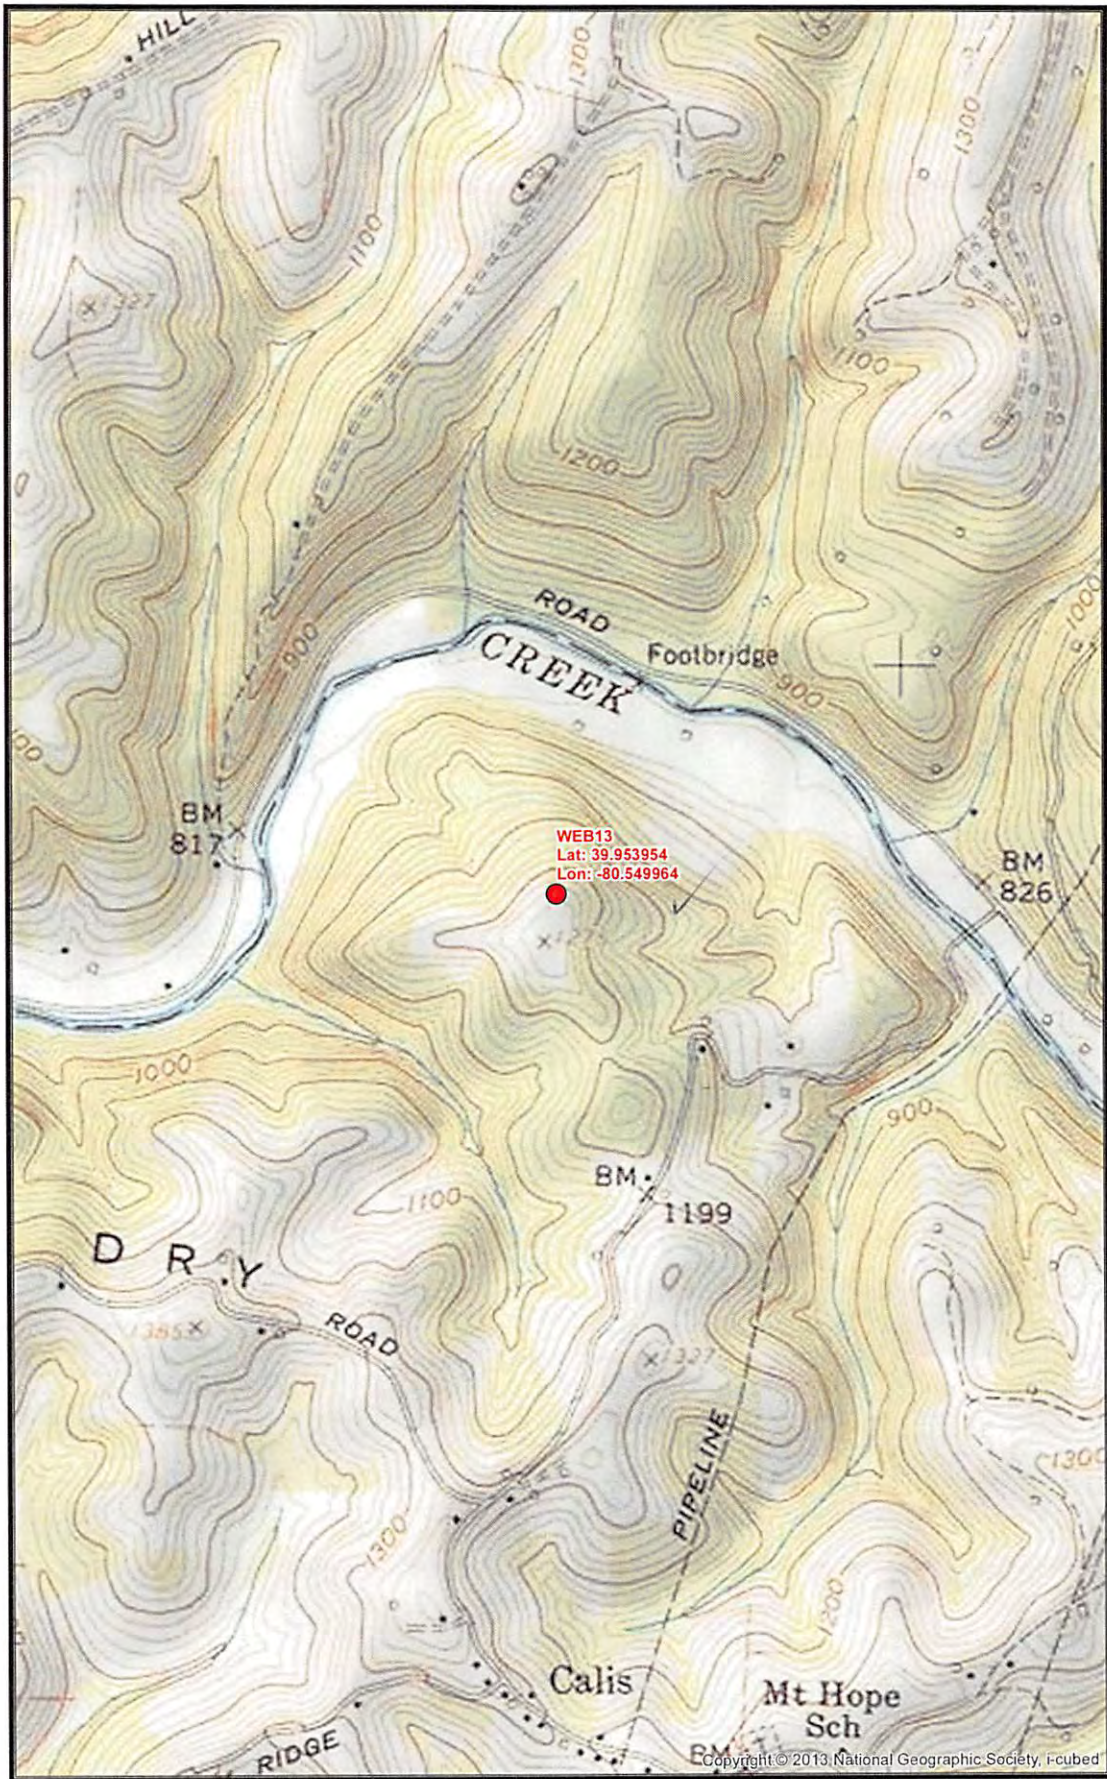

WEB13 SITE SAFETY PLAN  
- SITE WELL LOCATION -

 WEB13 Well Location



Scale 1" = 1,000'

Projection: NAD\_1927\_StatePlane\_Virginia\_North\_FIPS\_4701  
Units: Foot US



Disclaimer: All data is licensed for use by Noble Energy Inc. use only.

Date: 3/21/2013

Author: Christopher Glover



08/02/2013

Well is located on topo map 1,619' feet south of Latitude: 39° 57' 30"


Well is located on topo map 2,285' feet west of Longitude: 80° 32' 30"

**LEGEND**

- ⊕ - TOPO MAP POINT
- ☀ - WELL
- - ALL ARE POINTS UNLESS OTHERWISE NOTED.
- ⊙ - WATER SOURCE
- ⓪ - LEASE NUMBER BASED ON ATTACHED WW-6A1
- - - - - MINERAL TRACT BOUNDARY
- - - - - PARCEL LINES
- - - - - WELL REFERENCE
- - - - - PROPOSED HORIZONTAL WELL
- — — — — ROAD
- — — — — STREAM CENTER LINE

**WELLS WITHIN 3000'**


- - EXISTING WELLS
- ⊕ - PLUGGED WELLS

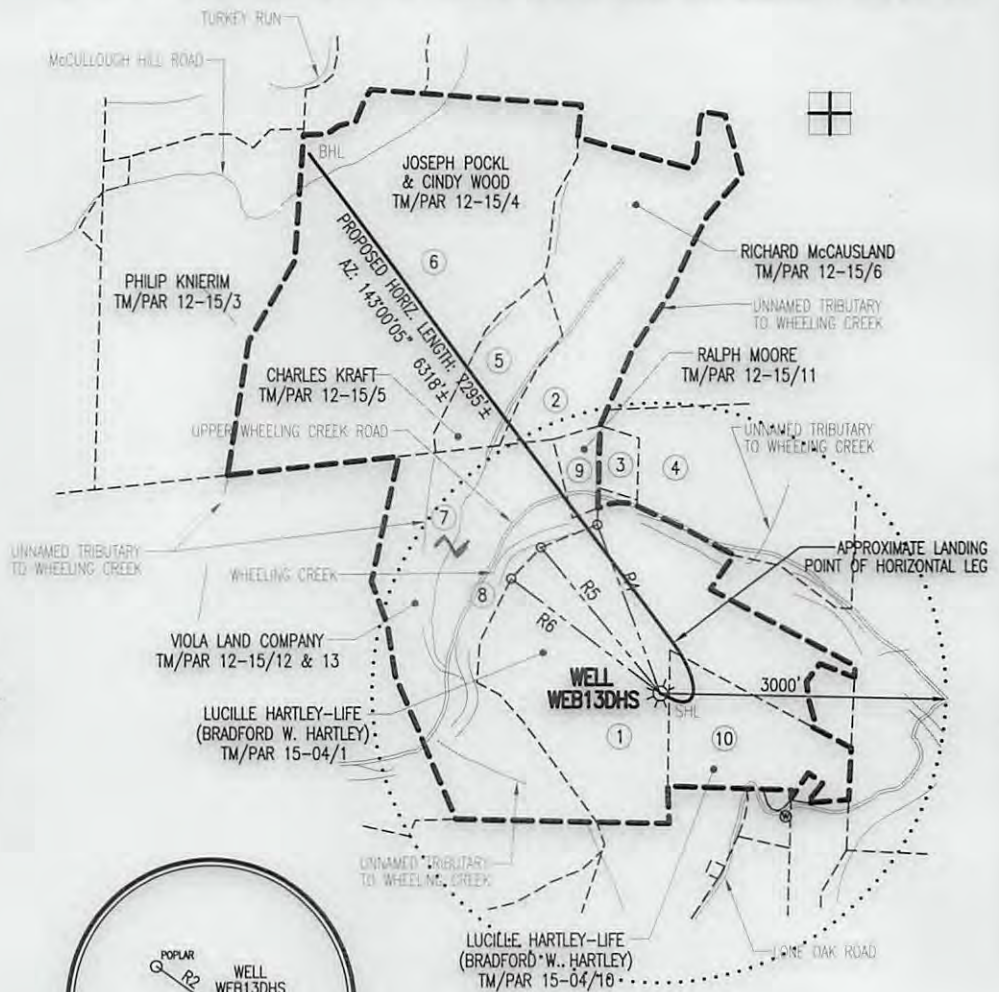

**SURFACE HOLE LOCATION (SHL)**  
 UTM 17-NAD83  
 N:4422747.33  
 E:538471.00  
 NAD27, WV NORTH  
 N:531273.82  
 E:1705694.75

**APPROX. LANDING POINT**  
 UTM 17-NAD83  
 N:4422906.43  
 E:538509.48  
 NAD27, WV NORTH  
 N:531793.80  
 E:1705829.75

**BOTTOM HOLE LOCATION (BHL)**  
 UTM 17-NAD83  
 N:4424424.32  
 E:537325.37  
 NAD27, WV NORTH  
 N:536839.85  
 E:1702027.48



| LINE | BEARING       | DISTANCE |
|------|---------------|----------|
| R1   | S 66°04'31" W | 222.63'  |
| R2   | N 54°33'55" W | 145.59'  |
| R3   | S 23°35'41" E | 189.45'  |
| R4   | N 20°13'45" W | 1848.50' |
| R5   | N 39°21'50" W | 1939.93' |
| R6   | N 52°39'14" W | 1938.84' |

**NOTES:**

1. There are no water wells or developed springs within 250' of proposed well.
2. There are no existing buildings within 625' of proposed well.
3. Proposed well is greater than 100' from perennial stream, wetland, pond, reservoir or lake.
4. There are no native trout streams within 300' of proposed well.
5. Proposed well is greater than 1000' from surface/groundwater intake or public water supply.
6. It is not the purpose or intention of this plat to represent surveyed locations of the surface or mineral parcels depicted herein. The location of the boundary lines, as shown, are based on record deed descriptions, field evidence found and/or tax map position, unless otherwise noted.



**Blue Mountain Engineering**  
 11023 MASON DIXON HIGHWAY  
 BURTON, WV 26562  
 PHONE: (304) 662-6486

FILE #: WEB13DHS  
 DRAWING #: WEB13DHS  
 SCALE: \_\_\_\_\_  
 MINIMUM DEGREE OF ACCURACY: 1/2500  
 PROVEN SOURCE OF ELEVATION: U.S.G.S. MONUMENT THOMAS 1498.81'

I, THE UNDERSIGNED, HEREBY CERTIFY THAT THIS PLAT IS CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF AND SHOWS ALL THE INFORMATION REQUIRED BY LAW AND THE REGULATIONS ISSUED AND PRESCRIBED BY THE DEPARTMENT OF ENVIRONMENTAL PROTECTION.

Signed: \_\_\_\_\_

R.P.E.: \_\_\_\_\_

L.L.S.: P.S. No. 2000



PLACE SEAL HERE

(+) DENOTES LOCATION OF WELL ON UNITED STATES TOPOGRAPHIC MAPS  
 WVDEP  
 OFFICE OF OIL & GAS  
 601 57TH STREET  
 CHARLESTON, WV 25304



DATE: MARCH 26, 2013

OPERATOR'S WELL #: WEB13DHS

API WELL #: 47 51 1659 HGA  
 STATE COUNTY PERMIT

Well Type:  Oil  Waste Disposal  Production  Deep  
 Gas  Liquid Injection  Storage  Shallow

WATERSHED: WHEELING CREEK ELEVATION: 1265.78'

COUNTY/DISTRICT: MARSHALL / WEBSTER QUADRANGLE: MAJORSVILLE, WV-PA 7.5'

SURFACE OWNER: LUCILLE HARTLEY-LIFE (BRADFORD W. HARTLEY) ACREAGE: 153.408±

OIL & GAS ROYALTY OWNER: SEE ATTACHED WW-6A1 ACREAGE: 648.274±

DRILL  CONVERT  DRILL DEEPER  REDRILL  FRACTURE OR STIMULATE

PLUG OFF OLD FORMATION  PERFORATE NEW FORMATION  PLUG & ABANDON

CLEAN OUT & REPLUG  OTHER CHANGE  (SPECIFY): \_\_\_\_\_

TARGET FORMATION: MARCELLUS ESTIMATED DEPTH: TVD: 6,668'± TMD: 13,443'±

WELL OPERATOR NOBLE ENERGY, INC. DESIGNATED AGENT STEVEN M. GREEN  
 Address 333 TECHNOLOGY DRIVE, SUITE 116 Address 500 VIRGINIA STREET EAST, UNITED CENTER SUITE 590  
 City CANONSBURG State PA Zip Code 15317 City CHARLESTON State WV Zip Code 25301

08/02/2013