

west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax Earl Ray Tomblin, Governor Randy C. Huffman, Cabinet Secretary www.dep.wv.gov

October 18, 2013

WELL WORK PERMIT Horizontal 6A Well

This permit, API Well Number: 47-5101674, issued to NOBLE ENERGY, INC., is evidence of permission granted to perform the specified well work at the location described on the attached pages and located on the attached plat, subject to the provisions of Chapter 22 of the West Virginia Code of 1931, as amended, and all rules and regulations promulgated thereunder, and to all conditions and provisions outlined in the pages attached hereto. Notification shall be given by the operator to the Oil and Gas Inspector at least 24 hours prior to the construction of roads, locations, and/or pits for any permitted work. In addition, the well operator shall notify the same inspector 24 hours before any actual well work is commenced and prior to running and cementing casing. Spills or emergency discharges must be promptly reported by the operator to 1-800-642-3074 and to the Oil and Gas inspector.

Please be advised that form WR-35, Well Operators Report of Well Work is to be submitted to this office within 90 days completion of permitted well work, as should form WR-34 Discharge Monitoring Report within 30 days of discharge of pits, if applicable. Failure to abide by all statutory and regulatory provisions governing all duties and operations hereunder may result in suspension or revocation of this permit and, in addition, may result in civil and/or criminal penalties being imposed upon the operators.

In addition to the applicable requirements of this permit, and the statutes and rules governing oil and gas activity in WV, this permit may contain specific conditions which must be followed. Permit conditions are attached to this cover letter.

Per 35CSR-4-5.2.g this permit will expire in two (2) years from the issue date unless permitted well work is commenced. If there are any questions please feel free to contact me at (304) 926-0499 ext. 1654.

James Martin

Chief

Operator's Well No: SHL 23 DHS

Farm Name: HALL, ROBERT W. JR., ET AL

API Well Number: 47-5101674

Permit Type: Horizontal 6A Well

Date Issued: 10/18/2013

Promoting a healthy environment.

API Number: 5101674

PERMIT CONDITIONS

West Virginia Code § 22-6A-8(d) allows the Office of Oil and Gas to place specific conditions upon this permit. Permit conditions have the same effect as law. Failure to adhere to the specified permit conditions may result in enforcement action.

CONDITIONS

- 1. This proposed activity may require permit coverage from the United States Army Corps of Engineers (USACOE). Through this permit, you are hereby being advised to consult with USACOE regarding this proposed activity.
- 2. If the operator encounters an unanticipated void, or an anticipated void at an unanticipated depth, the operator shall notify the inspector within 24 hours. Modifications to the casing program may be necessary to comply with W. Va. Code § 22-6A-5a (12), which requires drilling to a minimum depth of thirty feet below the bottom of the void, and installing a minimum of twenty (20) feet of casing. Under no circumstance should the operator drill more than fifty (50) feet below the bottom of the void or install less than twenty (20) feet of casing below the bottom of the void.
- 3. When compacting fills, each lift before compaction shall not be more than 12 inches in height, and the moisture content of the fill material shall be within limits as determined by the Standard Proctor Density test of the actual soils used in specific engineered fill, ASTM D698, Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort, to achieve 95 % compaction of the optimum density. Each lift shall be tested for compaction, with a minimum of two tests per lift per acre of fill. All test results shall be maintained on site and available for review.
- 4. Operator shall install signage per § 22-6A-8g (6) (B) at all source water locations included in their approved water management plan within 24 hours of water management plan activation.
- 5. Oil and gas water supply wells will be registered with the Office of Oil and Gas and all such wells will be constructed and plugged in accordance with the standards of the Bureau for Public Health set forth in its Legislative rule entitled *Water Well Regulations*, 64 C.S.R. 19. Operator is to contact the Bureau of Public Health regarding permit requirements. In lieu of plugging, the operator may transfer the well to the surface owner upon agreement of the parties. All drinking water wells within fifteen hundred feet of the water supply well shall be flow tested by the operator upon request of the drinking well owner prior to operating the water supply well.
- 6. Pursuant to the requirements pertaining to the sampling of domestic water supply wells/springs the operator shall, no later than thirty (30) days after receipt of analytical data provide a written copy to the Chief and any of the users who may have requested such analyses.
- 7. If any explosion or other accident causing loss of life or serious personal injury occurs in or about a well or well work on a well, the well operator or its contractor shall give notice, stating the particulars of the explosion or accident, to the oil and gas inspector and the Chief, within 24 hours of said accident.
- 8. During the casing and cementing process, in the event cement does not return to the surface, the oil and gas inspector shall be notified within 24 hours.

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS WELL WORK PERMIT APPLICATION

					5	06	W
1) Well Operator:	Noble	Energy,	Inc	494501907	Marshall	Sandhill	Majorsville
				Operator ID	County	District	Quadrangle
2) Operator's Well	Number:	SHL 23 DI	нѕ		Well Pad Nam	e: SHL 23	
3 Elevation, curren	t ground:	1376'	E	Elevation, proposed	post-construc	tion:	1374.75'
	Other f Gas:S	Shallow Horizontal	Oil	Undergroun Deep	d Storage		-
5) Existing Pad? Ye		NO					
6) Proposed Target Target-Marcellus, Dep				nted Thicknesses an	d Associated	Pressure(s):	
7) Proposed Total V	ertical De	pth: 6	6944'		-		
8) Formation at Tot	al Vertical	Depth:	Marcellus				
9) Proposed Total N	Aeasured I	Depth:	14,939'				
10) Approximate Fr	esh Water	Strata Dep	oths:	264'			
11) Method to Dete	rmine Fres	sh Water D	epth:	Offset well data			
12) Approximate Sa	altwater De	epths:	None noted f	or offsets			
13) Approximate Co	oal Seam I	Depths:	862', 866'	Pittsburgh			
14) Approximate D	epth to Pos	ssible Void	(coal mine	, karst, other):	None antic	cipated, drilling in	pillar-see mine maps
15) Does proposed adjacent to an ad				directly overlying and depth of mine:	or Yes, Shoe	emaker Mine with	base at appx. 866'
16) Describe propos	sed well w	ork: D	rill the vertical d	epth to the Marcellus at an	estimated total ver	ical depth of appro	eximately 6,904 feet.
Drill Horizontal leg - st	imulate and p	roduce the Ma	rcellus Formation	on.	- C	7/4	
	Committee Committee			m of 50' below the void but not	more than 100 below	the void, set a baske	et and grout to surface.
 Describe fracture The stimulation will be mu 	ring/stimul ultiple stages div	lating meth	ods in detai	il: well. Stage spacing is depend attached list.	ent upon engineering	() M	Recturing technique will
be utilized on each sta	ge using sand	l, water, and cl	hemicals. See	attached list.	4 -170-2	Office of Chaironnia	
18) Total area to be 19) Area to be distu					(acres):	Office Environme	5
					1.0	1/	01-63

20)

CASING AND TUBING PROGRAM

TYPE	Size	New or Used	Grade	Weight per ft.	FOOTAGE: For Drilling	INTERVALS: Left in Well	CEMENT: Fill -up (Cu. Ft.)
Conductor	30"	N	LS	117#	40'	40'	CTS
Fresh Water	20"	N	LS	94#	400'	400'	CTS
Coal	13 3/8"	N	J-55	54.5#	1326'	1326'	CTS
Intermediate	9 5/8"	N	J-55	36#	3381'	3381'	CTS
Production	5 1/2"	N	P110	20#	14,939'	14,939'	TOC 200' above 9.625 shoe
Tubing							
Liners							

7-23-13

TYPE	Size	Wellbore Diameter	Wall Thickness	Burst Pressure	Cement Type	Cement Yield
Conductor	30"	36"	0.375		Type 1/Class A	1.2
Fresh Water	20"	26"	.438	2110	Type 1/Class A	1.2
Coal	13 3/8"	17 1/2"	.380	2730	Type 1/Class A	1.2
Intermediate	9 5/8"	12 3/8"	.352	3520	Type 1/Class A	1.19
Production	5 1/2"	8 3/4" & 8 1/2"	.361	12,640	Type 1/Class A	1.27
Tubing						
Liners						

Pieceineq **PACKERS** Office of Oil and Gaa Protection
Office of Oil and Gaa Protection Kind: Sizes: Depths Set:

Page 2 of 3

casting will have a rigid bow spring every joint to KOP, rigid bow spring every third joint from KOP to top of cement. 22) Describe all cement additives associated with each cement type. Surface-Class A cement with flake and CaCl2 Intermediate- 15.6 ppg Class A +0.4% Ret, 0.15% Disp, 0.2% AntiFoam, 0.125#/sk Lost circ 30% Excess Yield=1.19 to surface. Production- 14.8 ppg class A 25:75:0 System +2.6% Cement extender, 0.7% Fluid Loss additive, 0.45% high temp retarder, 0.2% friction reducer 15% Excess Yield=1.27 TOC greater or equal to 200° above 9.625" shoe. Conductor-The hole is drilled w/air and casing is run on air. Fill with KCI water once drilled to TD. Once casing is at setting depth, circulate a minimum of one hole volume prior to pumping cement. Intermediate via a residual to 100 to	21) 1	Describe centralizer placement for each casing string.	No centralizers will be used with conductor casing. Surface
22) Describe all cement additives associated with each cement type. Surface-Class A cement with flake and CaCl2 Intermediate- 15.6 ppg Class A +0.4% Ret, 0.15% Disp, 0.2% AntiFoam, 0.125#/sk Lost circ 30% Excess Yield=1.19 to surface. Production- 14.8 ppg class A 25:75:0 System +2.6% Cement extender, 0.7% Fluid Loss additive, 0.45% high temp retarder, 0.2% friction reducer 15% Excess Yield=1.27 TOC greater or equal to 200 above 9.625" shoe. Conductor-The hole is drilled w/air and casing is run on air. Apart from Insuring the hole is clean via air circulation at TD, there are no other conditioning procedures. Surface-The hole is drilled w/air and casing is run on air. Fill with KCl water once drilled to TD. Once casing is at setting depth, circulate a minimum of one hole volume prior to pumping cement. Intermediate-Once surface casing is set and cemented, intermediate hole is drilled either on air or SOBM and filled with KCl water once drilled to TD. Production-The hole is drilled with SOBM and once to TD, circulated at maximum allowable	cas	ising will have bow spring centralizers on first 2 joints then every third joint to 100' from surface. Intermediate casing will	have bow spring centralizers on first 2 joints then every third joint to 100' from surface. Production
22) Describe all cement additives associated with each cement type. Surface-Class A cement with flake and CaCl2 Intermediate- 15.6 ppg Class A +0.4% Ret, 0.15% Disp, 0.2% AntiFoam, 0.125#/sk Lost circ 30% Excess Yield=1.19 to surface. Production- 14.8 ppg class A 25:75:0 System +2.6% Cement extender, 0.7% Fluid Loss additive, 0.45% high temp retarder, 0.2% friction reducer 15% Excess Yield=1.27 TOC greater or equal to 200 above 9.625" shoe. Conductor-The hole is drilled w/air and casing is run on air. Apart from insuring the hole is clean via air circulation at TD, there are no other conditioning procedures. Surface-The hole is drilled w/air and casing is run on air. Fill with KCl water once drilled to TD. Once casing is at setting depth, circulate a minimum of one hole volume prior to pumping cement. Coal-The hole is drilled and cased w/air or on Freshwater based mud. Once casing is at setting depth, the hole is filled w/KCl water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate-Once surface casing is set and cemented, intermediate hole is drilled either on air or or SOBM and filled with KCl water once drilled to TD. Production-The hole is drilled with SOBM and once to TD, circulated at maximum allowable	s	tring will have a rigid bow spring every joint to KOP, rigid	bow spring every third joint from KOP to top of
Surface-Class A cement with flake and CaCl2 Intermediate- 15.6 ppg Class A +0.4% Ret, 0.15% Disp, 0.2% AntiFoam, 0.125#/sk Lost circ 30% Excess Yield=1.19 to surface. Production- 14.8 ppg class A 25:75:0 System +2.6% Cement extender, 0.7% Fluid Loss additive, 0.45% high temp retarder, 0.2% friction reducer 15% Excess Yield=1.27 TOC greater or equal to 200 above 9.625" shoe. Conductor-The hole is drilled w/air and casing is run on air. Apart from Insuring the hole is clean via air circulation at TD, there are no other conditioning procedures. Surface-The hole is drilled w/air and casing is run on air. Fill with KCl water once drilled to TD. Once casing is at setting depth, circulate a minimum of one hole volume prior to pumping cement. Intermediate-Once surface casing is set and cemented, intermediate hole is drilled either on air or or SOBM and filled with KCl water once drilled to TD. Production-The hole is drilled with SOBM and once to TD, circulated at maximum allowable	C	ement.	
Surface-Class A cement with flake and CaCl2 Intermediate- 15.6 ppg Class A +0.4% Ret, 0.15% Disp, 0.2% AntiFoam, 0.125#/sk Lost circ 30% Excess Yield=1.19 to surface. Production- 14.8 ppg class A 25:75:0 System +2.6% Cement extender, 0.7% Fluid Loss additive, 0.45% high temp retarder, 0.2% friction reducer 15% Excess Yield=1.27 TOC greater or equal to 200 above 9.625" shoe. Conductor-The hole is drilled w/air and casing is run on air. Apart from Insuring the hole is clean via air circulation at TD, there are no other conditioning procedures. Surface-The hole is drilled w/air and casing is run on air. Fill with KCl water once drilled to TD. Once casing is at setting depth, circulate a minimum of one hole volume prior to pumping cement. Intermediate-Once surface casing is set and cemented, intermediate hole is drilled either on air or or SOBM and filled with KCl water once drilled to TD. Production-The hole is drilled with SOBM and once to TD, circulated at maximum allowable	_		
Intermediate- 15.6 ppg Class A +0.4% Ret, 0.15% Disp, 0.2% AntiFoam, 0.125#/sk Lost circ 30% Excess Yield=1.19 to surface. Production- 14.8 ppg class A 25:75:0 System +2.6% Cement extender, 0.7% Fluid Loss additive, 0.45% high temp retarder, 0.2% friction reducer 15% Excess Yield=1.27 TOC greater or equal to 200 above 9.625" shoe. 23) Proposed borehole conditioning procedures. Conductor-The hole is drilled w/air and casing is run on air. Apart from Insuring the hole is clean via air circulation at TD, there are no other conditioning procedures. Surface-The hole is drilled w/air and casing is run on air. Fill with KCl water once drilled to TD. Once casing is at setting depth, circulate a minimum of one hole volume prior to pumping cement. Coal-The hole is drilled and cased w/air or on Freshwater based mud. Once casing is at setting depth, the hole is filled w/KCl water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate-Once surface casing is set and cemented, intermediate hole is drilled either on air or or SOBM and filled with KCl water once drilled to TD. Production-The hole is drilled with SOBM and once to TD, circulated at maximum allowable	– 22) I	Describe all cement additives associated with each cement	type. Conductor-1.15% CaCl2.
Yield=1.19 to surface. Production- 14.8 ppg class A 25:75:0 System +2.6% Cement extender, 0.7% Fluid Loss additive, 0.45% high temp retarder, 0.2% friction reducer 15% Excess Yield=1.27 TOC greater or equal to 200' above 9.625" shoe. 23) Proposed borehole conditioning procedures. Conductor-The hole is drilled w/air and casing is run on air. Apart from Insuring the hole is clean via air circulation at TD, there are no other conditioning procedures. Surface-The hole is drilled w/air and casing is run on air. Fill with KCI water once drilled to TD. Once casing is at setting depth, circulate a minimum of one hole volume prior to pumping cement. Coal-The hole is drilled and cased w/air or on Freshwater based mud. Once casing is at setting depth, the hole is filled w/KCI water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate-Once surface casing is set and cemented, intermediate hole is drilled either on air or or SOBM and filled with KCI water once drilled to TD. Production-The hole is drilled with SOBM and once to TD, circulated at maximum allowable	S	Surface-Class A cement with flake and CaCl2	
O.45% high temp retarder, 0.2% friction reducer 15% Excess Yield=1.27 TOC greater or equal to 200' above 9.625" shoe. Conductor-The hole is drilled w/air and casing is run on air. Apart from insuring the hole is clean via air circulation at TD, there are no other conditioning procedures. Surface-The hole is drilled w/air and casing is run on air. Fill with KCI water once drilled to TD. Once casing is at setting depth, circulate a minimum of one hole volume prior to pumping cement. Coal-The hole is drilled and cased w/air or on Freshwater based mud. Once casing is at setting depth, the hole is filled w/KCI water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate-Once surface casing is set and cemented, intermediate hole is drilled either on air or or SOBM and filled with KCI water once drilled to TD. Production-The hole is drilled with SOBM and once to TD, circulated at maximum allowable	in	ntermediate- 15.6 ppg Class A +0.4% Ret, 0.15% Disp, 0.	2% AntiFoam, 0.125#/sk Lost circ 30% Excess
above 9.625" shoe. Conductor-The hole is drilled w/air and casing is run on air. Apart from Insuring the hole is clean via air circulation at TD, there are no other conditioning procedures. Surface-The hole is drilled w/air and casing is run on air. Fill with KCI water once drilled to TD. Once casing is at setting depth, circulate a minimum of one hole volume prior to pumping cement. Coal-The hole is drilled and cased w/air or on Freshwater based mud. Once casing is at setting depth, the hole is filled w/KCI water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate-Once surface casing is set and cemented, intermediate hole is drilled either on air or or SOBM and filled with KCI water once drilled to TD. Production-The hole is drilled with SOBM and once to TD, circulated at maximum allowable	Y	ield=1.19 to surface. Production- 14.8 ppg class A 25:75:0 Syste	m +2.6% Cement extender, 0.7% Fluid Loss additive,
23) Proposed borehole conditioning procedures. Conductor-The hole is drilled w/air and casing is run on air. Apart from Insuring the hole is clean via air circulation at TD, there are no other conditioning procedures. Surface-The hole is drilled w/air and casing is run on air. Fill with KCI water once drilled to TD. Once casing is at setting depth, circulate a minimum of one hole volume prior to pumping cement. Coal-The hole is drilled and cased w/air or on Freshwater based mud. Once casing is at setting depth, the hole is filled w/KCI water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate-Once surface casing is set and cemented, intermediate hole is drilled either on air or or SOBM and filled with KCI water once drilled to TD. Production-The hole is drilled with SOBM and once to TD, circulated at maximum allowable	0.	.45% high temp retarder, 0.2% friction reducer 15% Ex	cess Yield=1.27 TOC greater or equal to 200
the hole is clean via air circulation at TD, there are no other conditioning procedures. Surface-The hole is drilled water and casing is run on air. Fill with KCI water once drilled to TD. Once casing is at setting depth, circulate a minimum of one hole volume prior to pumping cement. Coal-The hole is drilled and cased water or on Freshwater based mud. Once casing is at setting depth, the hole is filled w/KCI water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate-Once surface casing is set and cemented, intermediate hole is drilled either on air or or SOBM and filled with KCI water once drilled to TD. Production-The hole is drilled with SOBM and once to TD, circulated at maximum allowable	a	bove 9.625" shoe.	
the hole is clean via air circulation at TD, there are no other conditioning procedures. Surface-The hole is drilled water and casing is run on air. Fill with KCI water once drilled to TD. Once casing is at setting depth, circulate a minimum of one hole volume prior to pumping cement. Coal-The hole is drilled and cased water or on Freshwater based mud. Once casing is at setting depth, the hole is filled w/KCI water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate-Once surface casing is set and cemented, intermediate hole is drilled either on air or or SOBM and filled with KCI water once drilled to TD. Production-The hole is drilled with SOBM and once to TD, circulated at maximum allowable	 23) F	Proposed horehole conditioning procedures conductor	The hole is drilled w/sir and casing is run on sir. Apart from insuring
w/air and casing is run on air. Fill with KCl water once drilled to TD. Once casing is at setting depth, circulate a minimum of one hole volume prior to pumping cement. Coal-The hole is drilled and cased w/air or on Freshwater based mud. Once casing is at setting depth, the hole is filled w/KCl water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate-Once surface casing is set and cemented, intermediate hole is drilled either on air or or SOBM and filled with KCl water once drilled to TD. Production-The hole is drilled with SOBM and once to TD, circulated at maximum allowable			
Coal-The hole is drilled and cased w/air or on Freshwater based mud. Once casing is at setting depth, the hole is filled w/KCI water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate-Once surface casing is set and cemented, intermediate hole is drilled either on air or or SOBM and filled with KCI water once drilled to TD. Production-The hole is drilled with SOBM and once to TD, circulated at maximum allowable			
hole volume is circulated prior to pumping cement. Intermediate-Once surface casing is set and cemented, intermediate hole is drilled either on air or or SOBM and filled with KCI water once drilled to TD. Production-The hole is drilled with SOBM and once to TD, circulated at maximum allowable			
or SOBM and filled with KCI water once drilled to TD. Production-The hole is drilled with SOBM and once to TD, circulated at maximum allowable	_		
	_		· · · · · · · · · · · · · · · · · · ·
	-		

^{*}Note: Attach additional sheets as needed.

DCP-FR2 Friction Reducer No hazardous components. DCP-RT1 Retarder No hazardous components. SPACER Dynaflush 2W Viscosity No hazardous components. N/A	Number 05-78-8 N/A Out 10 Out
DCP-FR2 Friction Reducer No hazardous components. DCP-RT1 Retarder No hazardous components. SPACER Dynaflush 2W Viscosity No hazardous components. N/A	N/A On strong
SPACER Dynaflush 2W Viscosity No hazardous components. N/A	
Dynaflush 2W Viscosity No hazardous components.	
Dynaflush 2W Viscosity No hazardous components.	V
장 DCP-GL1 Suspension Agent Welan Gum 96949	N/A
	949-22-3
DAP-401 Mutual Solvent Ethoxylated alcohols Trade S	de Secret
Alkoxylated terpene Trade S	de Secret
Polyethylene glycol 25322	322-68-3

Production Cement

			and see
Product Name	Product's Purpose	Chemical Ingredients	CAS Number 6834-92-0
DCP-EX1	Extender	Sodium metasilicate, anhydrous	6834-92-7
		Silicon dioxide	69012-64-2
		Iron Oxide	1309-37-1
		Silicon Carbide	ا سُنْ 21-2 409
DCP-EX2	Extender	Aluminum Oxide	1344-28-1
		Calcium Oxide	1305-78-8
		Magnesium Oxide	1309-48-4
		Silicon dioxide	14808-60-7
DCP-FL1	Fluid Loss Agent	No hazardous components.	N/A
DCP-FR2	Friction Reducer	No hazardous components.	N/A
DCP-RT3	Retarder	No hazardous components.	N/A
SPACER			
Dynaflush 2W	Viscosity	No hazardous components.	N/A
DCP-GL1	Suspension Agent	Welan Gum	96949-22-3
		Ethoxylated alcohols	Trade Secret
DAP-401	Mutual Solvent	Alkoxylated terpene	Trade Secret
		Polyethylene glycol	25322-68-3
Barite	Weighting Agent	Inorganic barium salt	7727-43-7



DRILLING WELL PLAN SHL-23D-HS (Marcellus HZ) Macellus Shale Horizontal Marshall County, WV

					SHL-23	D SHL	(Lat/Long)	(54675	3.02N, 1713081.08	E) (NAD27)	
Ground Elevatio	n	1376'			SHL-2	3D LP (Lat/Long)	(54871	0.94N, 1714191.03	E) (NAD27)	
Azm		325°			SHL-23	D BHL	(Lat/Long)	(55439	7.68N, 1710209.14	E) (NAD27)	
WELLBORE DIAGRAM	HOLE	CASING	GEOLOGY	MD	TVD	MUD	CEMENT	CENTRALIZERS	CONDITIONING	COMMENTS	
	100									Stabilize surface fill/soil.	
E E	36	30" 117#	Conductor	40	40	AIR	To Surface	N/A	Ensure the hole is clean at TD.	Conductor casing = 0.375* thickness	
	26	20° 94#		100	400	AIR	15.6 ppg Type 1 + 2% CaCl, 0.25# Lost Circ 30% Excess	Centralized every 3 joints to surface	Fill with KCI water once drilled to TD. Once casing is at setting depth, circulate a minimum of one hole volume prior to pumping	Surface casing = 0.438" v thickness Burst=2730 psi	
×	X		Surface Casing	400	400		Yield = 1.18	11	cement.		
		13-3/8* 54.5#					15.6 ppg Type 1 + 2% CaCl, 0.25# Lost Circ	Bow Spring on first 2 joints then every third	Fill with KCI water once drilled to TD. Once casing is at setting depth, circulate a	Intermediate casing = 0.3	
x	17 1/2	J-55 BTC	Pittsburgh Coal	862	862	AIR	30% Excess	joint to 100' form surface	minimum of one hole volume prior to pumping cement.	wall thickness Burst=2730 psi	
			Int. Casing	1326	1326		Yield = 1.18				
	12 3/8		Big Lime	2020	2020		15.6ppg Class A	T	Fill with KCI water once		
		9-5/8" 36# J-55 LTC	Big Injun	2113	2113	AIR	+0.4% Ret, 0.15% Disp, 0.2% AntiFoam,	Bow spring centralizers	drilled to TD. Once casing is		
			5th Sand Base	3131	3131		0.125#/sk Lost Circ	every third joint to 100'	at setting depth, circulate a minimum of one hole	the 5th Sand, Intermedia casing = 0.352" wall thickn	
x x					-		20% Excess Yield=1.19 To Surface	feet from surface.	volume prior to pumping cement.	Burst=3520 psi	
			Int. Casing	3381	3381						
x x		ı	Warren Sand		4602	8.0ppg - 9.0ppg SOBM	14.8ppg Class A 25:75:0 System				
	8.75" Vertical		Java		5255			Rigid Bow Spring every third joint from KOP to			
	8.75 Vertical		Angola		5487			тос	Once at TD, circulate at max allowable pump rate for at least 6x bottoms up. Once on bottom with casing, circulate a minimum of one bottom prior to		
		ľ	Rhinestreet		6117						
							+2.6% Cement extender, 0.7% Fluid Loss				
			Cashaqua		6551		additive, 0.45% high				
× ×		5-1/2" 20#	Middlesex	(6646	12.0ppg-	temp retarder, 0.2% friction reducer				
	8.75" Curve	HCP-110	West River		6682	12.5ppg SOBM	400/ 5				
		TXP BTC	Burkett		6737	SUBM	10% Excess Yield=1.27	Rigid Bow Spring every			
			Tully Limestone		6761		TOC >= 200'	joint to KOP	pumping cement.		
			Hamilton		6792		above 9.625" shoe	1 1 1 1			
			Marcellus		6904	12.0ppg-	1				
	8.75" - 8.5" Lateral		TD	14939	6944	12.5ppg SOBM					
x x			Onondaga		6954	0.000					
LP	@ 6944' TVD / 7996' MD		8.75 / 8.		emented Lo	ng String			i3' ft Lateral	TD @ +/-6944' TVD +/-14939' MD	



WW-9	
(3/13)	

	Page	_of
API Number 47	-	
Operator's	Well No. SHL 23 DHS	3

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION OFFICE OF OIL AND GAS

FLUIDS/ CUTTINGS DISPOSAL & RECLAMATION PLAN

Operator Name Noble Energy, Inc OP Code 494501907
Watershed (HUC 10) Robinson Fork-Enlow Fork Quadrangle Majorsville
Elevation 1376' County Marshall District Sandhill
Do you anticipate using more than 5,000 bbls of water to complete the proposed well work? Yes No Will a pit be used for drill cuttings? Yes No If so, please describe anticipated pit waste: Closed Loop-no pit will be utilized Will a synthetic liner be used in the pit? Yes No If so, what ml.?
Proposed Disposal Method For Treated Pit Wastes:
Land Application Underground Injection (UIC Permit Number) Reuse (at API Number TBD-Next anticipated well) Off Site Disposal (Supply form WW-9 for disposal location) Other (Explain)
Will closed loop system be used? Yes
Drilling medium anticipated for this well? Air, freshwater, oil based, etc. Air thru intermediate string then SOBM
-If oil based, what type? Synthetic, petroleum, etc. Synthetic
Additives to be used in drilling medium? Please see attached list
Drill cuttings disposal method? Leave in pit, landfill, removed offsite, etc
-If left in pit and plan to solidify what medium will be used? (cement, lime, sawdust)
-Landfill or offsite name/permit number? Please see attached list
I certify that I understand and agree to the terms and conditions of the GENERAL WATER POLLUTION PERMIT issued on August 1, 2005, by the Office of Oil and Gas of the West Virginia Department of Environmental Protection. I understand that the provisions of the permit are enforceable by law. Violations of any term or condition of the general permit and/or other applicable law or regulation can lead to enforcement action. I certify under penalty of law that I have personally examined and am familiar with the information submitted on this application form and all attachments thereto and that, based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine or imprisonment. Company Official Signature Jewicological Signature
Company Official Signature
Company Official Title Regulatory Technician
Subscribed and sworn before me this 22 nd day of July , 20 13 Notah Public My commission expires ADR Myles 33, 3013

Site Water/Cuttings Disposal

Cuttings

Haul off Company:

Eap Industries, Inc. DOT # 0876278 1575 Smith Twp State Rd. Atlasburg PA 15004 1-888-294-5227

Disposal Locations:

Apex Environmental, LLC Permit # 06-08438 11 County Road 78 Amsterdam, OH 43903 740-543-4389

Westmoreland Waste, LLC Permit # 100277 111 Conner Lane Belle Vernon, PA 15012 724-929-7694

Sycamore Landfill (Allied Waste) R30-07900105-2010 4301 Sycamore Ridge Road Hurricane, WV 25526 304-562-2611

<u>Water</u>

Haul off Company:

Dynamic Structures, Clear Creek DOT # 720485 3790 State Route 7 New Waterford, OH 44445 330-892-0164

Disposal Location:

Solidification
Waste Management, Arden Landfill Permit # 100172
200 Rangos Lane
Washington, PA 15301
724-225-1589

Solidification/Incineration
Soil Remediation, Inc. Permit # 02-20753
6065 Arrel-Smith Road
Lowelville, OH 44436



west virginia department of environmental protection



Water Management Plan: Primary Water Sources



WMP-01446

API/ID Number:

047-051-01674

Operator:

Noble Energy, Inc

SHL23DHS

Important:

For each proposed primary water source (including source intakes for purchased water sources) identified in your water management plan, and summarized herein, DEP has made an evaluation concerning water availability over the specified date range. DEP's assessment is based on the following considerations:

- Statistical analysis of historical USGS stream gauge data (transferred to un-gauged locations as necessary);
- •Identification of sensitive aquatic life (endangered species, mussels, etc.);
- •Quantification of known existing demands on the water supply (Large Quantity Users);
- •Minimum flows required by the Army Corps of Engineers; and
- · Designated stream uses.

Based on these factors, DEP has provided, for each intake location (and origination point for purchased water), a reference gauge location and discharge flow reading which must be surpassed prior to withdrawals. Additionally, DEP has established a minimum passby flow at the withdrawal location which must also be surpassed prior to withdrawals. These thresholds are considered terms of the permit and are enforceable as such.

DEP is aware that some intake points will be used for mutiple wells and well sites. In these cases, the thresholds set by the Water Management Plan are to be interepreted as total withdrawal limits for each location over the specified date range regardless of how many wells are supported by that intake.

For all purchased water intakes, determinations of water availability are made at the original source intake location. It is the responsibility of the Oil and Gas Operator, not the seller, to cease withdrawal of water from the seller when flows are less than the minimum gauge reading at the stream gauge referenced by the Water Management Plan in order to protect stream uses.

Note that the determinations made herein are based on the best available data, but it is impossible to predict water availability in the future. While the DEP has carefully established these minimum withdrawal thresholds, it remains the operator's responsibility to protect aquatic life at all times. Approval to withdrawal is contingent upon permission from the land owner. It is the responsibility of the operator to secure and maintain permission prior to any withdrawals.

The operator is reminded that 24-48 hours prior to withdrawing (or purchasing) water, DEP must be notified by email at DEP.water.use@wv.gov.

APPROVED SEP 2 0 2013

Source Summary

WMP-01446

API Number:

047-051-01674

Operator:

Noble Energy, Inc

SHL23DHS

Stream/River

Wheeling Creek Pump Station 1 @ CNX Land Resources Source

Marshall

Owner:

Consol Energy

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

8/21/2013

8/21/2014

10,164,000

39.95205

-80.56189

Regulated Stream?

Ref. Gauge ID:

3111955

Wheeling Creek near Majorsville, WV

Max. Pump rate (gpm):

1,000

Min. Gauge Reading (cfs):

18.23

Min. Passby (cfs)

16.63

DEP Comments:

Wheeling Creek Pump Station 2 @ CNX Land Resources Source

Marshall

Owner:

CNX Land Resources, Inc.

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude: 39.949578

-80.531256

8/21/2013

8/21/2014

10,164,000

3111955

Wheeling Creek near Majorsville, WV

Max. Pump rate (gpm):

Regulated Stream?

1,000

Min. Gauge Reading (cfs):

Ref. Gauge ID:

18.23

Min. Passby (cfs)

16.24

DEP Comments:

Source Summary

WMP-01446

API Number:

047-051-01674

Operator:

Noble Energy, Inc

SHL23DHS

Purchased Water

West Virginia American Water - Weston Water Treatme Source

Lewis

Owner:

West Virginia American

Water

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

8/21/2013

8/21/2014

10,164,000

500,000

Regulated Stream? Stonewall Jackson Dam Ref. Gauge ID:

3061000

WEST FORK RIVER AT ENTERPRISE, WV

Max. Pump rate (gpm):

Min. Gauge Reading (cfs):

170.57

Min. Passby (cfs)

DEP Comments:

Bethlehem Water Department Source

Ohio

Owner:

Bethlehem Water Department

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

8/21/2013

8/21/2014

10,164,000

200,000

9999999

Ohio River Station: Willow Island Lock & Dam

✓ Regulated Stream?

Max. Pump rate (gpm):

Ohio River Min. Flow Ref. Gauge ID:

6,468.00

Min. Passby (cfs)

DEP Comments:

Bethlehem Water Department purchases all its water from the City of Wheeling. Thresholds are set based on the location of the City of Wheeling's raw water intake.

Source

Wellsburg Water Department

Brooke

Owner:

Wellsburg Water Department

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

8/21/2013

8/21/2014

10,164,000

200,000

✓ Regulated Stream?

Ohio River Min. Flow Ref. Gauge ID:

Min. Gauge Reading (cfs):

9999999

Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm):

Min. Gauge Reading (cfs):

6,468.00

Min. Passby (cfs)

DEP Comments:

This alluvial groundwater well is, to some extent, under the influence of the Ohio River.

Please adhere to stated minimum flow requirements on the Ohio River for

withdrawals. http://www.erh.noaa.gov/er/ohrfc/flows.shtml

Source

Moundsville Water Board

Marshall

Owner:

Moundsville Water Treatment Plant

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

8/21/2013

8/21/2014

10,164,000

2,000,000

✓ Regulated Stream?

Ohio River Min. Flow Ref. Gauge ID:

999999

Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm):

Min. Gauge Reading (cfs):

6,468.00

Min. Passby (cfs)

DEP Comments:

This alluvial groundwater well is, to some extent, under the influence of the Ohio River.

Please adhere to stated minimum flow requirements on the Ohio River for

withdrawals. http://www.erh.noaa.gov/er/ohrfc/flows.shtml

Source

Dean's Water Service

Ohio

Owner:

Dean's Water Service

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

8/21/2013

8/21/2014

10,164,000

600,000

999999

Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm):

✓ Regulated Stream?

Min. Gauge Reading (cfs):

Ref. Gauge ID:

6.468.00

Min. Passby (cfs)

DEP Comments:

Source

Wheeling Water Department

Ohio River Min. Flow

Ohio River Min. Flow

Ohio

Owner:

Wheeling Water Department

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

8/21/2013

8/21/2014

10,164,000

17,500

999999

Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm):

✓ Regulated Stream?

Min. Gauge Reading (cfs):

Ref. Gauge ID:

6,468.00

Min. Passby (cfs)

DFP Comments:

Refer to the specified sation on the National Weather Service's Ohio River forecasts at

the following website: http://www.erh.noaa.gov/ohrfc//flows.shtml

Ohio county PSD Ohio County PSD Ohio Owner: Source

Max. daily purchase (gal) Intake Latitude: Intake Longitude: Total Volume (gal) Start Date **End Date** 10,164,000 720,000

☑ Regulated Stream? Ohio River Station: Willow Island Lock & Dam Ohio River Min. Flow Ref. Gauge ID: 9999999

Min. Passby (cfs) Max. Pump rate (gpm): Min. Gauge Reading (cfs): 6,468.00

Refer to the specified station on the National Weather Service's Ohio River forecast **DEP Comments:** website: http://www.erh.noaa.gov/ohrfc//flows.shtml

8/21/2013

8/21/2014

Source Summary

WMP-01446

API Number:

047-051-01674

Operator:

Noble Energy, Inc.

SHL23DHS

Ground Water

Shoemaker Groundwater Well #3 Source

Marshall

Owner:

Consol Energy

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

8/21/2013

8/21/2014

10,164,000

40.0222

-80.73389

✓ Regulated Stream?

Ohio River Min. Flow Ref. Gauge ID:

9999999

Ohio River Station: Willow Island Lock & Dam.

Max. Pump rate (gpm):

800

Min. Gauge Reading (cfs):

6.468.00

Min. Passby (cfs)

DEP Comments:

This alluvial groundwater well is, to some extent, under the influence of the Ohio River. Please adhere to stated minimum flow requirements on the Ohio River for

withdrawals. http://www.erh.noaa.gov/er/ohrfc/flows.shtml

Source

Shoemaker Groundwater Well #4

Marshall

Owner:

Consol Energy

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

40.022293

Intake Latitude: Intake Longitude: -80.733586

8/21/2013

8/21/2014

10,164,000

9999999

✓ Regulated Stream?

Max. Pump rate (gpm):

800

Ohio River Min. Flow

Min. Gauge Reading (cfs):

Ref. Gauge ID:

6.468.00

Min. Passby (cfs)

Ohio River Station: Willow Island Lock & Dam

DEP Comments:

This alluvial groundwater well is, to some extent, under the influence of the Ohio River. Please adhere to stated minimum flow requirements on the Ohio River for

withdrawals. http://www.erh.noaa.gov/er/ohrfc/flows.shtml

Source

Shoemaker Groundwater Well #5

Marshall

Owner:

Consol Energy

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

8/21/2013

8/21/2014

10,164,000

40.021256

-80.734568

✓ Regulated Stream?

Ohio River Min. Flow Ref. Gauge ID:

9999999

Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm):

800

Min. Gauge Reading (cfs):

6,468.00

Min. Passby (cfs)

DEP Comments:

This alluvial groundwater well is, to some extent, under the influence of the Ohio River.

Please adhere to stated minimum flow requirements on the Ohio River for

withdrawals. http://www.erh.noaa.gov/er/ohrfc/flows.shtml

Source Shoemaker Groundwater Well #6 Marshall Owner: Consol Energy

Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: 8/21/2013 8/21/2014 10,164,000 40.02076 -80.73397

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm): 800 Min. Gauge Reading (cfs): 6,468.00 Min. Passby (cfs)


DEP Comments: This alluvial groundwater well is, to some extent, under the influence of the Ohio River.

Please adhere to stated minimum flow requirements on the Ohio River for

withdrawals. http://www.erh.noaa.gov/er/ohrfc/flows.shtml

			000.10	<u> Detail</u>			
	WMP-0	1446	API/ID Number:	047-051-01674 L23DHS	4 Operator:	Noble Er	nergy, Inc
ource ID): 24277 Sou	rce Name Shoe	emaker Groundwater V		Source	Latitude: 40.	0222
		Cons	sol Energy		Source Lo	ongitude: -80	.73389
☐ Tro ✓ Reg	HUC-8 Code: Drainage Area (dangered Species? out Stream? gulated Stream? oximate PSD?		Stream?	Marshall	Anticipated withdrawal Anticipated withdrawa Total Volume from S Max. Pump	al end date: ource (gal):	8/21/2013 8/21/2014 10,164,000 800 s Trucks:
✓ Gau	uged Stream?				M	ax. Truck pump ra	te (gpm)
	Reference Gaug Drainage Area (sq	9999999 . mi.) 25,0	Ohio River Station:	Willow Island Lock		eshold (cfs):	6468
<u> Vlonth</u>	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)				
1	45,700.00	-	*				
2	49,200.00	-	-				
2							
3	65,700.00		170				
	65,700.00 56,100.00	-					

Water Availability Profile

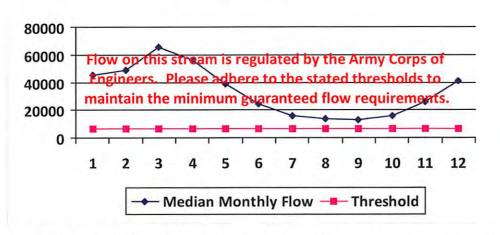

Water Availability Assessment of Location

Base Threshold (cfs):	-
Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	1.78
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

6

8

9

10

11 12 24,300.00

13,400.00

12,800.00


15,500.00 26,300.00

41,300.00

WMP-01446	API/ID Number:	047-051-01674	Operator:	Noble En	ergy, Inc
	SHL	23DHS			
Source ID: 24278 Source Name Shoe	emaker Groundwater W	ell #4	Source Latit	ude: 40.0	22293
Cons	sol Energy		Source Longit	ude: -80.	733586
HUC-8 Code: 5030106 Drainage Area (sq. mi.): 250	00 County: N	Marshall	nticipated withdrawal star		8/21/2013
☐ Endangered Species? ✓ Mussel S	county.		Anticipated withdrawal end Total Volume from Source		8/21/2014 10,164,000
☐ Trout Stream? ☐ Tier 3? ☐ Regulated Stream? ☐ Ohio River	Min. Flow		Max. Pump rate		800
□ Proximate PSD?✓ Gauged Stream?				Simultaneous uck pump rat	
Reference Gaug 9999999	Ohio River Station: \	Willow Island Lock 8	& Dam		
Drainage Area (sq. mi.) 25,0	00.00		Gauge Thresho	ld (cfs):	6468

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	45,700.00	6	-
2	49,200.00	14	
3	65,700.00	-	-
4	56,100.00	4	
5	38,700.00	1.3	
6	24,300.00	-	
7	16,000.00		
8	13,400.00	-	~
9	12,800.00	4	
10	15,500.00	4	-
11	26,300.00	i,a	
12	41,300.00		



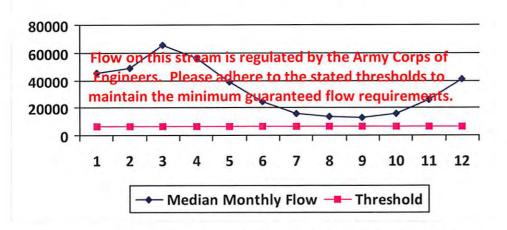

Water Availability Assessment of Location


Base Threshold (cfs):	-
Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	1.78
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	
Passby at Location (cfs):	

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

WMP-01446 API/ID Number: 047-051-01674 Operator: Noble Energy, Inc SHL23DHS Source Latitude: 40.021256 Shoemaker Groundwater Well #5 Source ID: 24279 Source Name Source Longitude: -80.734568 Consol Energy 5030106 HUC-8 Code: 8/21/2013 Anticipated withdrawal start date: 25000 Marshall Drainage Area (sq. mi.): County: Anticipated withdrawal end date: 8/21/2014 ☐ Mussel Stream? **Endangered Species?** 10,164,000 Total Volume from Source (gal): Trout Stream? Tier 3? 800 Max. Pump rate (gpm): Regulated Stream? Ohio River Min. Flow Max. Simultaneous Trucks: Proximate PSD? Max. Truck pump rate (gpm) Gauged Stream? 9999999 Ohio River Station: Willow Island Lock & Dam Reference Gaug 25,000.00 6468 Gauge Threshold (cfs): Drainage Area (sq. mi.)

Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	45,700.00	-	-
2	49,200.00	-	2
3	65,700.00		*
4	56,100.00	-	
5	38,700.00	,4	+
6	24,300.00		-
7	16,000.00		-
8	13,400.00		4
9	12,800.00	3.0	-
10	15,500.00	6	
11	26,300.00	9.5	-3-
12	41,300.00	2	



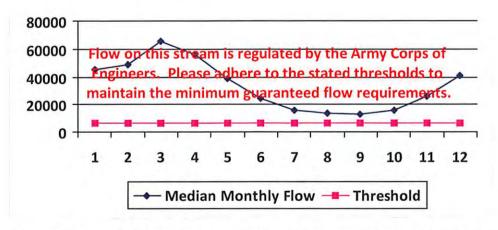


Water Availability Assessment of Location

Base Threshold (cfs):	-
Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	1.78
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	
Passby at Location (cfs):	

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

WMP-01446		-051-01674 Operator:	Noble Ener	gy, Inc
Source ID: 24280 Source Name Shoemak Consol E	SHL23DHS er Groundwater Well #6 nergy	Source	e Latitude: 40.020 Longitude: -80.73	
Drainage Area (sq. mi.): 25000 Endangered Species?	County: Marshal m?	Anticipated withdrawa Anticipated withdraw Total Volume from S	al end date:	8/21/2013 8/21/2014 10,164,000
✓ Regulated Stream? Ohio River Min.☐ Proximate PSD?✓ Gauged Stream?	Flow		rate (gpm): Max. Simultaneous To Max. Truck pump rate	
Reference Gaug 9999999 C Drainage Area (sq. mi.) 25,000.0	hio River Station: Willow 00		reshold (cfs):	6468

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	45,700.00		
2	49,200.00		-
3	65,700.00		4
4	56,100.00	1.	1.0
5	38,700.00		19
6	24,300.00		+
7	16,000.00	-	-
8	13,400.00		· ·
9	12,800.00		-
10	15,500.00	-	4.
11	26,300.00	-	-
12	41,300.00		-

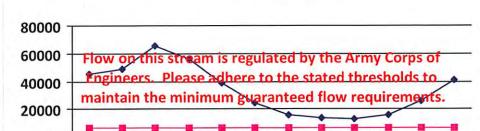

Water Availability Profile

3 4 5 6 7 8 9 10 11 12 Median Monthly Flow — Threshold

Water Availability Assessment of Location

Pump rate (cfs): 1.78 Headwater Safety (cfs): 0.00	Upstream Demand (cfs): Downstream Demand (cfs):	0.00
reduction bursely (oray)	Pump rate (cfs):	1.78
Ungauged Stream Safety (cfs): 0.00	Headwater Safety (cfs):	0.00
	Ungauged Stream Safety (cfs):	0.00
	Passby at Location (cfs):	


[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

1

2

WMP-01446 API/ID Number: 047-051-01674 Operator: Noble Energy, Inc SHL23DHS West Virginia American Water - Weston Water Treat Source Latitude: -Source ID: 24281 Source Name West Virginia American Water Source Longitude: -5020002 HUC-8 Code: 8/21/2013 Anticipated withdrawal start date: Drainage Area (sq. mi.): 104.83 County: Lewis Anticipated withdrawal end date: 8/21/2014 **Endangered Species?** ✓ Mussel Stream? 10,164,000 Total Volume from Source (gal): Trout Stream? ☐ Tier 3? Max. Pump rate (gpm): Regulated Stream? Stonewall Jackson Dam Max. Simultaneous Trucks: Proximate PSD? Weston WTP Max. Truck pump rate (gpm) Gauged Stream? WEST FORK RIVER AT ENTERPRISE, WV 3061000 Reference Gaug 234 759.00 Gauge Threshold (cfs): Drainage Area (sq. mi.)

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	321.23		4
	361.67	19.0	
2	465.85	4.1	
4	266.43		112
5	273.47	-	-
6	137.03		
7	88.78		
8	84.77	-	-
9	58.98	-	4
10	57.83	-	12.
11	145.12		1.6
12	247.76	-	

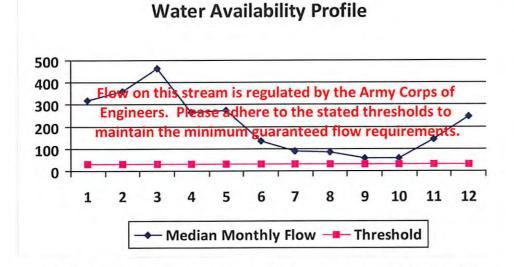

Min. Gauge Reading (cfs):	
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	8.08
Pump rate (cfs):	
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	24.32
Base Threshold (cfs):	-

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.




Water Availability Profile

26,300.00

41,300.00

11 12

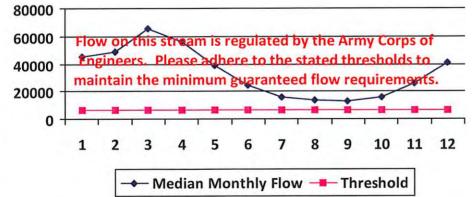

Water Availability Assessment of Location

Base Threshold (cfs):

Upstream Demand (cfs):

Downstream Demand (cfs):

Pump rate (cfs):

Headwater Safety (cfs):

Ungauged Stream Safety (cfs):

O.00

Min. Gauge Reading (cfs):

Passby at Location (cfs):

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

Source Detail WMP-01446 API/ID Number: 047-051-01674 Operator: Noble Energy, Inc. SHL23DHS Wellsburg Water Department Source ID: 24283 Source Name Source Latitude: -Wellsburg Water Department Source Longitude: -5030106 HUC-8 Code: 8/21/2013 Anticipated withdrawal start date: Drainage Area (sq. mi.): 25000 County: Brooke Anticipated withdrawal end date: 8/21/2014 **Endangered Species?** ✓ Mussel Stream? Total Volume from Source (gal): 10,164,000 Trout Stream? Tier 3? Max. Pump rate (gpm): Ohio River Min. Flow Regulated Stream? Max. Simultaneous Trucks: Proximate PSD? Wellsburg Water Department Max. Truck pump rate (gpm) Gauged Stream? Ohio River Station: Willow Island Lock & Dam 9999999 Reference Gaug 6468 25,000.00 Gauge Threshold (cfs): Drainage Area (sq. mi.) Estimated Median Threshold Available monthly flow (+ pump Month (cfs) water (cfs) 45,700.00 2 49,200.00 65,700.00 56,100.00 4 38,700.00 5 24,300.00 6 16,000.00 7 13,400.00 8 9 12,800.00 10 15,500.00 11 26,300.00 12 41,300.00 Water Availability Assessment of Location Water Availability Profile Base Threshold (cfs): Upstream Demand (cfs): 80000 Downstream Demand (cfs): 60000 eam is regulated by the Army Corps of Pump rate (cfs): here to the stated thresholds to 40000 Headwater Safety (cfs): 0.00 maintain the minimum guaranteed flow requirements

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

20000

1

2

3

5

6

7

Median Monthly Flow — Threshold

8

9

10 11

12

0.00

Ungauged Stream Safety (cfs):

Min. Gauge Reading (cfs): Passby at Location (cfs):

Source Detail WMP-01446 API/ID Number: 047-051-01674 Operator: Noble Energy, Inc SHL23DHS Moundsville Water Board Source Latitude: -Source ID: 24284 Source Name Moundsville Water Treatment Plant Source Longitude: -HUC-8 Code: 5030106 8/21/2013 Anticipated withdrawal start date: Drainage Area (sq. mi.): 25000 Marshall County: Anticipated withdrawal end date: 8/21/2014 **Endangered Species?** ✓ Mussel Stream? 10,164,000 Total Volume from Source (gal): Trout Stream? Tier 3? Max. Pump rate (gpm): Regulated Stream? Ohio River Min. Flow Max. Simultaneous Trucks: Proximate PSD? Max. Truck pump rate (gpm) Gauged Stream? 9999999 Ohio River Station: Willow Island Lock & Dam Reference Gaug 6468 25,000.00 Gauge Threshold (cfs): Drainage Area (sq. mi.) Estimated Median Threshold Available monthly flow (+ pump Month (cfs) water (cfs) 45,700.00 1 49,200.00 2 3 65,700.00 56,100.00 4 38,700.00 5 24,300.00 6 7 16,000.00 8 13,400.00 9 12,800.00 10 15,500.00 26,300.00 11 12 41,300.00 Water Availability Assessment of Location **Water Availability Profile** Base Threshold (cfs): Upstream Demand (cfs): 80000 Downstream Demand (cfs): 60000 eam is regulated by the Army Corps of Pump rate (cfs): 40000

12

maintain the minimum guaranteed flow requirements.

6

7

Median Monthly Flow — Threshold

8

9

10

11

3

4

5

2

20000

0

1

0.00

0.00

Headwater Safety (cfs):

Ungauged Stream Safety (cfs):


Min. Gauge Reading (cfs):

Passby at Location (cfs):

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

WMP-01446 API/ID Number: 047-051-01674 Operator: Noble Energy, Inc SHL23DHS 24285 Dean's Water Service Source Latitude: -Source ID: Source Name Dean's Water Service Source Longitude: -5030106 HUC-8 Code: 8/21/2013 Anticipated withdrawal start date: Ohio Drainage Area (sq. mi.): 25000 County: Anticipated withdrawal end date: 8/21/2014 ✓ Mussel Stream? **Endangered Species?** 10,164,000 Total Volume from Source (gal): Trout Stream? ☐ Tier 3? Max. Pump rate (gpm): Regulated Stream? Ohio River Min. Flow Max. Simultaneous Trucks: Proximate PSD? Max. Truck pump rate (gpm) Gauged Stream? 9999999 Ohio River Station: Willow Island Lock & Dam Reference Gaug 25,000.00 6468 Gauge Threshold (cfs): Drainage Area (sq. mi.) Estimated Median Threshold Available monthly flow (+ pump Month (cfs) water (cfs) 45,700.00 1 49,200.00 2 3 65,700.00 4 56,100.00 5 38,700.00 24,300.00 6 16,000.00 13,400.00 8 12,800.00 9 15,500.00 10



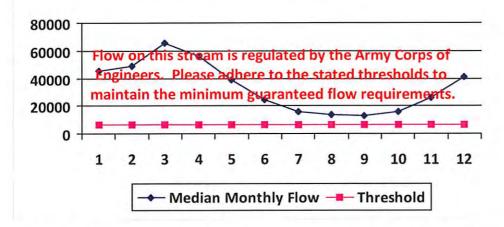

Water Availability Assessment of Location

Base Threshold (cfs):	-
Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00


"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

11

12

26,300.00

41,300.00

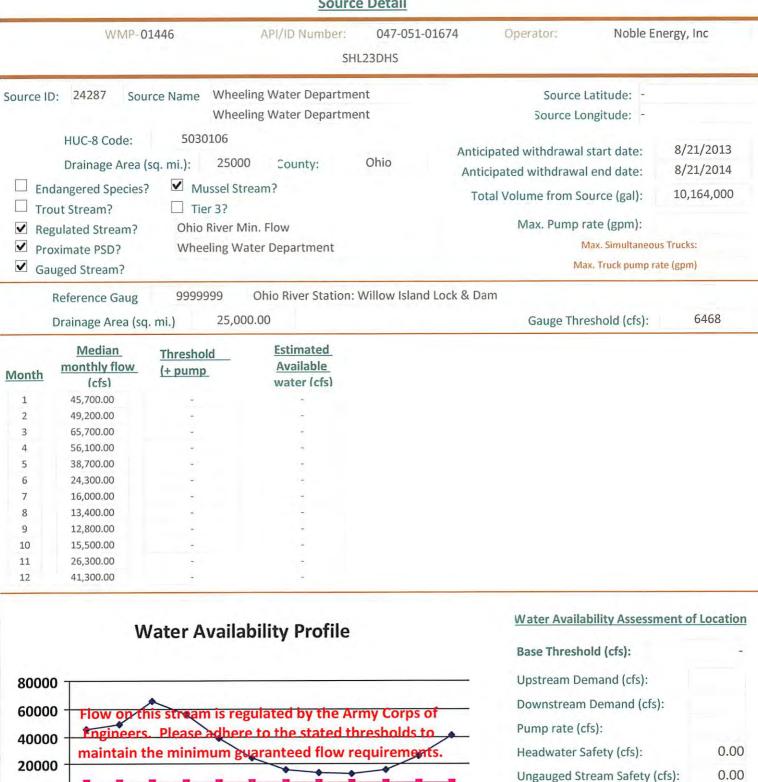

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

Min. Gauge Reading (cfs):

Passby at Location (cfs):

Median Monthly Flow — Threshold

API/ID Number: 047-051-01674 Noble Energy, Inc WMP-01446 Operator: SHL23DHS Ohio County PSD 24288 Source Name Source Latitude: -Source ID: Ohio county PSD Source Longitude: -5030106 HUC-8 Code: 8/21/2013 Anticipated withdrawal start date: 25000 Drainage Area (sq. mi.): County: Ohio Anticipated withdrawal end date: 8/21/2014 **Endangered Species?** ✓ Mussel Stream? 10,164,000 Total Volume from Source (gal): Trout Stream? Tier 3? Max. Pump rate (gpm): Ohio River Min. Flow Regulated Stream? Max. Simultaneous Trucks: Proximate PSD? Wheeling Water Department Max. Truck pump rate (gpm) Gauged Stream? Ohio River Station: Willow Island Lock & Dam 9999999 Reference Gaug 6468 25,000.00 Drainage Area (sq. mi.) Gauge Threshold (cfs): Median Estimated Threshold Available monthly flow (+ pump Month (cfs) water (cfs) 45,700.00 2 49,200.00 3 65,700.00 4 56,100.00 38,700.00 5 24,300.00 6 7 16,000.00 13,400.00 8 9 12,800.00 10 15,500.00 11 26.300.00 12 41,300.00 Water Availability Assessment of Location Water Availability Profile Base Threshold (cfs): Upstream Demand (cfs): 80000 Downstream Demand (cfs): 60000 eam is regulated by the Army Corps of Pump rate (cfs): there to the stated thresholds to 40000 Headwater Safety (cfs): 0.00 maintain the minimum guaranteed flow requirements.

20000

1

2

3

5

6

7

Median Monthly Flow — Threshold

8

9

10

11

12

0.00


Ungauged Stream Safety (cfs):

Min. Gauge Reading (cfs): Passby at Location (cfs):

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

WMP-01446	API/ID Number:	047-051-01674	Operator: Nob	le Energy, Inc
	SHL	.23DHS		
A STATE OF THE PARTY OF THE PAR	heeling Creek Pump Stati	on 1 @ CNX Land Resour		39.95205
HUC-8 Code: 5030106 Drainage Area (sq. mi.): 15	66.06 County; N	Aarshall Antici	Source Longitude: pated withdrawal start date pated withdrawal end date al Volume from Source (gal Max. Pump rate (gpm)	8/21/2013 e: 8/21/2014): 10,164,000
□ Proximate PSD?✓ Gauged Stream?			Max. Simulta Max. Truck pu	mp rate (gpm)
Reference Gaug 3111955 Drainage Area (sq. mi.)	Wheeling Creek nea	r Majorsville, WV	Gauge Threshold (cf	s): 16

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	0.00	18.66	-
2	0.00	18.66	
3	0.00	18.66	-
4	0.00	18.66	19
5	0.00	18.66	-
6	0.00	18.66	
7	0.00	18.66	.5.
8	0.00	18.66	1.5
9	0.00	18.66	
10	0.00	18.66	0.0
11	0.00	18.66	42
12	0.00	18.66	

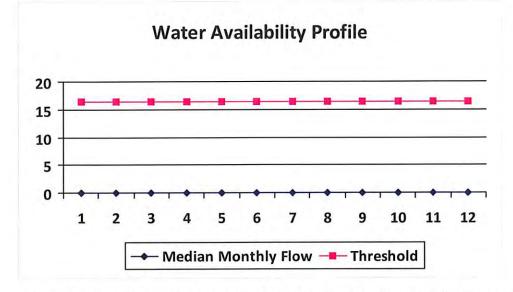


Min. Gauge Reading (cfs): Passby at Location (cfs):	18.23 16.43
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	0.00
Pump rate (cfs):	2.23
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	16.43

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

WMP-03	1446	API/ID Number:	047-051-01674	Operator: Noble	Energy, Inc
		SH	L23DHS		
ource ID: 24276 Sour		eling Creek Pump Stat Land Resources, Inc.	ion 2 @ CNX Land F		9.949578 30.531256
HUC-8 Code: Drainage Area (s Endangered Species? Trout Stream? Regulated Stream? Proximate PSD? ✓ Gauged Stream?		county.	Marshall	Anticipated withdrawal start date: Anticipated withdrawal end date: Total Volume from Source (gal): Max. Pump rate (gpm): Max. Simultane Max. Truck pump	
Reference Gaug Drainage Area (sq.	3111955 . mi.) 15	Wheeling Creek ne	ar Majorsville, WV	Gauge Threshold (cfs):	16

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	0.00	18.27	
2	0.00	18.27	1.5
3	0.00	18.27	1.5
4	0.00	18.27	1.87
5	0.00	18.27	
6	0.00	18.27	1.4
7	0.00	18.27	
8	0.00	18.27	
9	0.00	18.27	9.
10	0.00	18.27	100
11	0.00	18.27	7
12	0.00	18.27	

Water Availability Profile

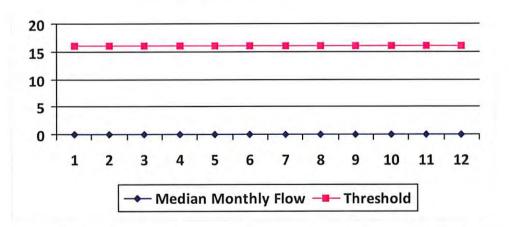

Water Availability Assessment of Location

Base Threshold (cfs):	16.04
Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	2.23
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	18.23
Passby at Location (cfs):	16.04

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

west virginia department of environmental protection



Water Management Plan: Secondary Water Sources



WMP-01446

API/ID Number

047-051-01674

Operators

Noble Energy, Inc

SHL23DHS

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Multi-site impoundment

Source ID: 24289 Source Name

SHL #1 Centralized Freshwater Impoundment

Source start date:

8/21/2013

Source end date:

8/21/2014

Source Lat:

39.979696

Source Long:

-80.579465

County

Marshall

Max. Daily Purchase (gal)

Total Volume from Source (gal):

10,164,000

DEP Comments:

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-200

WMP-01446 API/ID Number 047-051-01674 Noble Energy, Inc Operator:

SHL23DHS

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

SHL #2 Centralized Waste Pit Source ID: 24290 Source Name

Source start date:

8/21/2013

Source end date:

8/21/2014

Source Lat:

39.966973

-80.561377 Source Long:

County

Marshall

Max. Daily Purchase (gal)

Total Volume from Source (gal):

10,164,000

WV51-WPC-00001 DEP Comments:

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-201

Source ID: 24291 Source Name

SHL #3 Centralized Waste Pit

Source start date:

8/21/2013

Source end date:

8/21/2014

Source Lat:

39.974133

Source Long:

-80.55527

County

Marshall

Max. Daily Purchase (gal)

Total Volume from Source (gal):

10,164,000

DEP Comments:

WV51-WPC-00002

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-202

WMP-01446 API/ID Number 047-051-01674 Operator: Noble Energy, Inc

SHL23DHS

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable). DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

SHL #4 Centralized Waste Pit Source ID: 24292 Source Name 8/21/2013 Source start date:

8/21/2014 Source end date:

Marshall 39.963284 -80.562743 County Source Lat: Source Long:

10,164,000 Total Volume from Source (gal): Max. Daily Purchase (gal)

DEP Comments: WV51-WPC-00003

Source Lat:

DEP Comments:

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-204

Purchased Water

Bridgeport Ohio Water Department Source ID: 24286 Source Name 8/21/2013 Source start date: Public Water Provider 8/21/2014 Source end date:

Source Long:

40.08348 -80.736488 County

200,000 10,164,000 Max. Daily Purchase (gal) Total Volume from Source (gal):

Please ensure that purchases from this source are approved by, and completed in accordance with, requirements set forth by the State of Ohio Department of

Environmental Protection.

WMP-01446 API/ID Number 047-051-01674 Operator: Noble Energy, Inc

SHL23DHS

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Recycled Frac Water

Source ID: 24293 Source Name Various

Source start date: 8/21/2013

Source end date: 8/21/2014

Source Lat: Source Long: County

Max. Daily Purchase (gal)

Total Volume from Source (gal): 10,164,000

DEP Comments: Sources include, but are not limited to, the SHL17 and SHL23 well pads.

Map from a Flex Viewer application

Powered by ArcGIS



Copyright 2010 ESRI. All rights reserved. Printed on Mon Jul 22 2013 03:15:51 PM.

