

west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax Earl Ray Tomblin, Governor Randy C. Huffman, Cabinet Secretary www.dep.wv.gov

November 22, 2013

WELL WORK PERMIT

Horizontal 6A Well

This permit, API Well Number: 47-5101677, issued to NOBLE ENERGY, INC., is evidence of permission granted to perform the specified well work at the location described on the attached pages and located on the attached plat, subject to the provisions of Chapter 22 of the West Virginia Code of 1931, as amended, and all rules and regulations promulgated thereunder, and to all conditions and provisions outlined in the pages attached hereto. Notification shall be given by the operator to the Oil and Gas Inspector at least 24 hours prior to the construction of roads, locations, and/or pits for any permitted work. In addition, the well operator shall notify the same inspector 24 hours before any actual well work is commenced and prior to running and cementing casing. Spills or emergency discharges must be promptly reported by the operator to 1-800-642-3074 and to the Oil and Gas inspector.

Please be advised that form WR-35, Well Operators Report of Well Work is to be submitted to this office within 90 days completion of permitted well work, as should form WR-34 Discharge Monitoring Report within 30 days of discharge of pits, if applicable. Failure to abide by all statutory and regulatory provisions governing all duties and operations hereunder may result in suspension or revocation of this permit and, in addition, may result in civil and/or criminal penalties being imposed upon the operators.

In addition to the applicable requirements of this permit, and the statutes and rules governing oil and gas activity in WV, this permit may contain specific conditions which must be followed. Permit conditions are attached to this cover letter.

Per 35CSR-4-5.2.g this permit will expire in two (2) years from the issue date unless permitted well work is commenced. If there are any questions, please feel free to contact me at (304) 926-0499 ext. 1654.

James Martin

Chief

Operator's Well No: SHL 23 HHS

Farm Name: HALL, ROBERT W. JR., ET AL

API Well Number: 47-5101677

Permit Type: Horizontal 6A Well

Date Issued: 11/22/2013

API Number: 51-01677

PERMIT CONDITIONS

West Virginia Code § 22-6A-8(d) allows the Office of Oil and Gas to place specific conditions upon this permit. Permit conditions have the same effect as law. <u>Failure to adhere to the specified permit</u> conditions may result in enforcement action.

CONDITIONS

- 1. This proposed activity may require permit coverage from the United States Army Corps of Engineers (USACOE). Through this permit, you are hereby being advised to consult with USACOE regarding this proposed activity.
- 2. If the operator encounters an unanticipated void, or an anticipated void at an unanticipated depth, the operator shall notify the inspector within 24 hours. Modifications to the casing program may be necessary to comply with W. Va. Code § 22-6A-5a (12), which requires drilling to a minimum depth of thirty feet below the bottom of the void, and installing a minimum of twenty (20) feet of casing. Under no circumstance should the operator drill more than fifty (50) feet below the bottom of the void or install less than twenty (20) feet of casing below the bottom of the void.
- 3. When compacting fills, each lift before compaction shall not be more than 12 inches in height, and the moisture content of the fill material shall be within limits as determined by the Standard Proctor Density test of the actual soils used in specific engineered fill, ASTM D698, Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort, to achieve 95 % compaction of the optimum density. Each lift shall be tested for compaction, with a minimum of two tests per lift per acre of fill. All test results shall be maintained on site and available for review.
- 4. Operator shall install signage per § 22-6A-8g (6) (B) at all source water locations included in their approved water management plan within 24 hours of water management plan activation.
- 5. Oil and gas water supply wells will be registered with the Office of Oil and Gas and all such wells will be constructed and plugged in accordance with the standards of the Bureau for Public Health set forth in its Legislative rule entitled *Water Well Regulations*, 64 C.S.R. 19. Operator is to contact the Bureau of Public Health regarding permit requirements. In lieu of plugging, the operator may transfer the well to the surface owner upon agreement of the parties. All drinking water wells within fifteen hundred feet of the water supply well shall be flow tested by the operator upon request of the drinking well owner prior to operating the water supply well.
- 6. Pursuant to the requirements pertaining to the sampling of domestic water supply wells/springs the operator shall, no later than thirty (30) days after receipt of analytical data provide a written copy to the Chief and any of the users who may have requested such analyses.
- 7. If any explosion or other accident causing loss of life or serious personal injury occurs in or about a well or well work on a well, the well operator or its contractor shall give notice, stating the particulars of the explosion or accident, to the oil and gas inspector and the Chief, within 24 hours of said accident.
- 8. During the casing and cementing process, in the event cement does not return to the surface, the oil and gas inspector shall be notified within 24 hours.

WW - 6B (3/13)

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS WELL WORK PERMIT APPLICATION

1) Well Operator:	Noble E	nergy,	Inc	494501907	Marshall	Sandhill	Majorsville
.,				Operator ID	County	District	Quadrangle
2) Operator's Well l	Number:	SHL 23 HH	IS	W	ell Pad Name	e: SHL 23	
3 Elevation, current	ground:	1376'	Ele	vation, proposed p	ost-construct	ion: _1	1374.75'
4) Well Type: (a) C	as		Oil	Underground	Storage		-
	Other						
(b) Ii	Gas: Sh	nallow		Deep			
	H	orizontal					
5) Existing Pad? Ye	s or No:	NO					
6) Proposed Target Target-Marcellus, Dept		•	=	ed Thicknesses and	l Associated l	Pressure(s):	
7) Proposed Total V	ertical Dep	th: <u>7</u>	054'				
8) Formation at Tota	al Vertical l	Depth:	Onondaga the	n plug back to base of I	Marcellus with so	lid cement plug	<u> </u>
9) Proposed Total M	leasured De	epth:	13,957'				
10) Approximate Fr	esh Water S	Strata Dep	ths: <u>26</u>	4'			
11) Method to Deter	rmine Fresh	Water De	epth: Of	fset well data			
12) Approximate Sa	ltwater Dep	oths:	None noted for	offsets			
13) Approximate Co	oal Seam D	epths:	862', 866' Pit	tsburgh			
14) Approximate De	epth to Poss	sible Void	(coal mine, l	carst, other):	None antic	ipated, drilling in	pillar-see mine maps
15) Does proposed adjacent to an ac				irectly overlying o d depth of mine:	r Yes, Shoe	maker Mine with	base at appx. 866'
16) Describe propos	sed well wo	rk: <u>o</u> r	ill the vertical depth n	ot more than 99' into the Ononc	laga at an estimated to	otal vertical depth of a	pproximately 7,054 feet.
Log well then plug back	with solid cemer	nt plug from TC	to KOP at 6904'.	Proceed with drilling Horiz	ontal leg - stimulate	and produce the i	Marcellus Formation.
If we should encounter a	n unanticipated v	old we will inst	all casing at a min	imum of 50° but not more (than 100' below the	void, set a basket	and grout to surface.
17) Describe fractur	•	•		I. Stage spacing is depende	nt upon engineering	design. Slickwater	fracturing technique will
be utilized on each sta	ge using sand,	water, and ch	emicals. See att	ached list.			
					J		
18) Total area to be	disturbed, i	including i	roads, stockp	ile area, pits, etc, ((acres):	15.78 acres	<u> </u>
19) Area to be distu	rbed _fer_w e	Had only	y, less access	road (acres):	9.16 acres	i	
	e of Oil						Page 1 of 3

NOV **20** 2013 11/22/2013

20)

CASING AND TUBING PROGRAM

ТҮРЕ	Size	New or Used	Grade	Weight per ft.	FOOTAGE: For Drilling	INTERVALS: Left in Well	CEMENT: Fill -up (Cu. Ft.)
Conductor	30"	N	LS	117#	40'	40'	CTS
Fresh Water	20"	N	LS	94#	400'	400'	CTS
Coal	13 3/8"	N	J-55	54.5#	1326'	1326'	CTS
Intermediate	9 5/8"	N	J-55	36#	3381'	3381'	CTS
Production	5 1/2"	N	P110	20#	13,957'	13,957'	TOC 200' above 9.625 shoe
Tubing							
Liners							

7-23-13

TYPE	Size	Wellbore Diameter	Wall Thickness	Burst Pressure	Cement Type	Cement Yield
Conductor	30"	36"	0.375		Type 1/Class A	1.2
Fresh Water	20"	26"	.438	2110	Type 1/Class A	1.2
Coal	13 3/8"	17 1/2"	.380	2730	Type 1/Class A	1.2
Intermediate	9 5/8"	12 3/8"	.352	3520	Type 1/Class A	1.19
Production	5 1/2"	8 3/4" & 8 1/2"	.361	12,640	Type 1/Class A	1.27
Tubing						
Liners						

PACKERS

Kind:		
Sizes:		
Depths Set:	_	
	Receive	ed
	Alle - 2 2012	Page 2 of 3
	Wy Deni Office of Ou	11/22/201

WV Dept. of Environmental Protection 11/22/2013 WW - 6B (3/13)

) Describe centralizer placement for each casing string.	No centralizers will be used with conductor casing. Surface
casing will have bow spring centralizers on first 2 joints then every third joint to 100' from surface. Intermediate casing w	ill have bow spring centralizers on first 2 joints then every third joint to 100' from surface. Production
string will have a rigid bow spring every joint to KOP, rigid	bow spring every third joint from KOP to top of
cement.	
2) Describe all cement additives associated with each cemen	type. Conductor-1.15% CaCl2.
	tit in the second secon

Sch. Variance 10/31/13

Surface and Coal-15.6 ppg Type 1 +2% CaCl, 2% Accelerator, 0.2% Antifoam and 0.125#/sk Flake. Excess Yield 1.18
Intermediate- 15.6 ppg Class A +0.4% Ret, 0.15% Disp, 0.2% AntiFoam, 0.125#/sk Lost circ 30% Excess
Yield=1.19 to surface. Production- 14.8 ppg class A 25:75:0 System +2.6% Cement extender, 0.7% Fluid Loss additive,
0.45% high temp retarder, 0.2% friction reducer 15% Excess Yield=1.27 TOC greater or equal to 200' above 9.625" shoe.

23) Proposed borehole conditioning procedures.

Conductor-The hole is drilled w/air and casing is run on air. Apart from insuring the hole is clean via air circulation at TD, there are no other conditioning procedures. Surface-The hole is drilled w/air and casing is run on air. Fill with KCI water once drilled to TD. Once casing is at setting depth, circulate a minimum of one hole volume prior to pumping cement. Coal-The hole is drilled and cased w/air or on Freshwater based mud. Once casing is at setting depth, the hole is filled w/KCI water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate-Once surface casing is set and cemented, intermediate hole is drilled either on air or or SOBM and filled with KCI water once drilled to TD. Production-The hole is drilled with SOBM and once to TD, circulated at maximum allowable pump rate for at least 6x bottoms up. Once on bottom with casing, circulate a minimum of one hole volume prior to pumping cement.

*Note: Attach additional sheets as needed.

₹ECEIVED

Other of Oil and Gas

NOV 20 2013

Page 3 of 3

NOV 19 2013

noble energy

DRILLING WELL PLAN

SHL-23H Pilot Hole-HS (Marcellus HZ)

Macellus Shale Horizontal Marshall County, WV

		SHL-23H Pilot Hole SHL (Lat/Long)	(546767.01N, 1713038.31E) (NAD27)
Ground Elevation	1376'	SHL-23H Pilot Hole LP (Lat/Long)	(547136.99N, 1712545.33E) (NAD27)
Azm	2250	CUI 22H Bilet Hele BUI (I et/l ene)	(FERENC 40N) 4700700 CF) (N) 4 DOT)

								orie (Laurong)	(0.101.	11.0114, 17 10000.01	-/ (14/10/21/
Ground Ele	vation		1376		SHI	23H Pi	lot Hole	ELP (Lat/Long)	(54713	6.99N, 1712545.33	E) (NAD27)
Azm			325°		SHL	-23H Pil	ot Hole	BHL (Lat/Long)	(5525	96.42N, 1708722.6E	E) (NAD27)
WELLBORE DI	AGRAM	HOLE	CASING	GEOLOGY	MD	TVD	MUD	CEMENT	CENTRALIZERS	CONDITIONING	COMMENTS
		36	30" 117#	Conductor	40	40	AIR	To Surface	N/A	Ensure the hole is clean at TD.	Stabilize surface fill/soll, Conductor casing = 0,375" wall thickness
		26	20" 94#				AIR	15.6 ppg Type 1 + 2% CaCl, 0.25# Lost Circ	Centralized every 3 joints to surface	Fill with KCI water once drilled to TD. Once casing is at setting depth, circulate a minimum of one hole	Surface casing = 0,438" wa thickness
x	x			Surface Casing	400	400		30% Excess Yield = 1.18		volume prior to pumping cement.	Burst=2730 psi
		19-1	13-3/8" 54.5#					15.6 ppg Type 1 + 2% CaCl, 0.25# Lost Circ	Bow Spring on first 2 joints then every third	Fill with KCI water once drilled to TD. Once casing is at setting depth, circulate	Intermediate casing = 0.380
x	l x	17 1/2	J-55 BTC	Pittsburgh Coal	862	862	AIR	30% Excess	joint to 100' form	a minimum of one hole	wall thickness
			1500	Int. Casing	1326	1326		Yield ≈ 1.18	surface	volume prior to pumping cement.	Burst=2730 psi
x	l x			Big Lime	2020	2020		15.6ppg Class A			
				Big Injun	2113	2113		+0.4% Ret, 0.15% Disp,	2000 10040 1400 200	Fill with KCI water once drilled to TD. Once casing	Casing to be ran 250' belo
		12 3/8	9-5/8" 36#	5th Sand Base	3131	3131	AIR	0.2% AntiFoam, 0.125#/sk Lost Circ	Bow spring centralizers every third joint to 100'	is at setting depth, circulate	the 5th Sand, Intermediate
x	×		J-55 LTC					20% Excess	feet from surface.	a minimum of one hole volume prior to pumping	casing = 0.352" wall thickne Burst=3520 psi
	X			Int. Casing	3381	3381		Yield=1.19 To Surface		cement.	5.51.50.50.50.
×	x			Warren Sand		4602					
		L DAVE TO C		Java		5255	8.0ppg -		Rigid Bow Spring every		
		8.75" Vertical	1	Angola		5487	9.0ppg SOBM	44.0 01 4.05.75.0	third joint from KOP to TOC		
				Rhinestreet		6117		14.8ppg Class A 25:75:0 System	100		
								+2.6% Cement extender, 0.7% Fluid		2	
			l ii	Cashaqua		6551		Loss additive, 0.45%		Once at TD, circulate at max allowable pump rate	Production casing = 0.361
×	×		5-1/2" 20#	Middlesex		6646	12.0ppg-	high temp retarder, 0.2% friction reducer		for at least 6x bottoms up.	wall thickness
		8.75" Curve	HCP-110	West River		6682	12.5ppg			Once on bottom with casing, circulate a minimum	Burst=12640 psi Note:Actual centralizer
			TXP BTC	Burkett		6737	SOBM	10% Excess Yield=1.27	Rigid Bow Spring every	of one hole volume prior to	schedules may be change due to hole conditions
				Tully Limestone		6761			joint to KOP	pumping cement.	que to noie conditions
				Hamilton		6792		TOC >= 200' above 9.625" shoe			
		W . T		Marcellus		6904	12.0ppg-	800VE 8.020 SINCE			
		8.75" - 8.5" Lateral		TD	13957	6944	12.5ppg SOBM				
×	×										
	10.000	X							Aminimization (
	LP @ 63	MD / 7292				emented Lo CP-110 TXP	BTC		+/-666	5' ft Lateral	TD @ +/-6944' TVD +/-13957' MD
×		×	X	Onondaga	6954	6966 Base	X	*	X	X	X=centralizers
		San ask	Isolation /	Huntersville	5966 Top	7251 Base	12.0ppg-	17.5ppg Class H (SLB) from TD to 200' above KOP		Once at TD, circulate at	OH lose losses on leastle
		8.75" Pilot	Sidetrack Cement plugs	Pilot Hole TD in the Huntersville 99' past the Onondaga Ceiling	7053	7053	12.5ppg 12.5ppg SOBM	(2) 800' balanced plugs w/ 2.375" tubing	N/A	drilling pump rate for at least three hours. TOOH and run OH logs.	OH logs, loggers on location to call TD. Dir. Surveys shoe to TD

RECEIVED Office of Oil and Gas

		-1	Page	of	
API Number	47 -	21	-01	677	
Oper	rator's	Well	No. SHL 23	HHS	

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION OFFICE OF OIL AND GAS

FLUIDS/ CUTTINGS DISPOSAL & RECLAMATION PLAN

Operator Name Noble Energy, Inc	OP Code 494501907
Watershed (HUC 10) Robinson Fork-Enlow	Fork Quadrangle Majorsville
Elevation 1376' Cour	ty_Marshall District_Sandhill
Will a pit be used for drill cuttings? Yes If so, please describe anticipated pit was	te: Closed Loop-no pit will be utilized
Will a synthetic liner be used in the pit? Proposed Disposal Method For Treated	
Land Application Underground Injection Reuse (at API Number Off Site Disposal (Su	r (UIC Permit Number) r TBD-Next anticipated well) pply form WW-9 for disposal location)
Will closed loop system be used? Yes	
Drilling medium anticipated for this well? Air, f	reshwater, oil based, etc. Air thru intermediate string then SOBM
-If oil based, what type? Synthetic, petr	oleum, etc. Synthetic
Additives to be used in drilling medium? Please	see attached list
Drill cuttings disposal method? Leave in pit, lan	dfill, removed offsite, etc
-If left in pit and plan to solidify what m	edium will be used? (cement, lime, sawdust)
-Landfill or offsite name/permit number	? Please see attached list
on August 1, 2005, by the Office of Oil and Gas provisions of the permit are enforceable by law law or regulation can lead to enforcement action. I certify under penalty of law that I h application form and all attachments thereto a	ave personally examined and am familiar with the information submitted on this nd that, based on my inquiry of those individuals immediately responsible for formation is true, accurate, and complete. I am aware that there are significant
Company Official Signature 4Ml/h	OFFICIAL SEAL Notary Public, State Of West Virginia
Company Official (Typed Name) Jessica Les	Ka Julian L. ADKINS
Company Official Title Regulatory Technicia	P.O. Box 13059 Charleston, WV 25369 My Commission Expires November 23, 2015
Subscribed and sworn before me this 23rd	day of July , 2013
Jama L. Vellans	Notary Public
My commission expires	0 Office of Olya1922/20

Proposed Revegetation Treatment: Acres Distur	bed 15.78 acres Prevegetation pH	
') +0 ')		
	o correct to pH	
Fertilizer (10-20-20 or equivalent) 50	lbs/acre (500 lbs minimum)	
Mulch hay or straw at 2	Tons/acre	
	Seed Mixtures	
Area I	Area	п
Seed Type lbs/acre	Seed Type	lbs/acre
Tall Fescue 40	Tall Fescue	40
Ladino Clover 5	Ladino Clover	5
	ea for land application	
	ea for land application.	
Drawing(s) of road, location,pit and proposed are		
Drawing(s) of road, location,pit and proposed are Photocopied section of involved 7.5' topographic	c sheet.	
Attach: Drawing(s) of road, location,pit and proposed are Photocopied section of involved 7.5' topographic Plan Approved by: Bill Hendershot	c sheet.	
Plan Approved by: Bill Hendershot	c sheet.	
Plan Approved by: Bill Hendershot	c sheet.	
Plan Approved by: Bill Hendershot	c sheet.	
Plan Approved by: Bill Hendershot	c sheet.	
Drawing(s) of road, location,pit and proposed are Photocopied section of involved 7.5' topographic Plan Approved by: Bill Hendershot	c sheet.	
Drawing(s) of road, location,pit and proposed are Photocopied section of involved 7.5' topographic Plan Approved by: Bill Hendershot	c sheet.	
Drawing(s) of road, location,pit and proposed are Photocopied section of involved 7.5' topographic Plan Approved by: Bill Hendershot	c sheet.	
Drawing(s) of road, location,pit and proposed are Photocopied section of involved 7.5' topographic Plan Approved by: Bill Hendershot	c sheet.	
Drawing(s) of road, location,pit and proposed are Photocopied section of involved 7.5' topographic Plan Approved by: Bill Hendershot	c sheet.	
Plan Approved by: Bill Hendershot	c sheet.	
Drawing(s) of road, location,pit and proposed are	c sheet.	
Photocopied section of involved 7.5' topographic Plan Approved by: Bill Hendershot Comments:	sheet. Bull fluctuate	
Photocopied section of involved 7.5' topographic Plan Approved by: Bill Hendershot	sheet. Bull fluctuate	

Site Water/Cuttings Disposal

Cuttings

Haul off Company:

Eap Industries, Inc. DOT # 0876278 1575 Smith Twp State Rd. Atlasburg PA 15004 1-888-294-5227

Disposal Locations:

Apex Environmental, LLC Permit # 06-08438 11 County Road 78 Amsterdam, OH 43903 740-543-4389

Westmoreland Waste, LLC Permit # 100277 111 Conner Lane Belle Vernon, PA 15012 724-929-7694

Sycamore Landfill (Allied Waste) R30-07900105-2010 4301 Sycamore Ridge Road Hurricane, WV 25526 304-562-2611

Water


Haul off Company:

Dynamic Structures, Clear Creek DOT # 720485 3790 State Route 7 New Waterford, OH 44445 330-892-0164

Disposal Location:

Solidification
Waste Management, Arden Landfill Permit # 100172
200 Rangos Lane
Washington, PA 15301
724-225-1589

Solidification/Incineration Soil Remediation, Inc. Permit # 02-20753 6065 Arrel-Smith Road Lowelville, OH 44436





west virginia department of environmental protection



Water Management Plan: Primary Water Sources



WMP-01448

API/ID Number:

047-051-01677

Operator:

Noble Energy, Inc

SHL23HHS

Important:

For each proposed primary water source (including source intakes for purchased water sources) identified in your water management plan, and summarized herein, DEP has made an evaluation concerning water availability over the specified date range. DEP's assessment is based on the following considerations:

- •Statistical analysis of historical USGS stream gauge data (transferred to un-gauged locations as necessary);
- •Identification of sensitive aquatic life (endangered species, mussels, etc.);
- Quantification of known existing demands on the water supply (Large Quantity Users);
- · Minimum flows required by the Army Corps of Engineers; and
- · Designated stream uses.

Based on these factors, DEP has provided, for each intake location (and origination point for purchased water), a reference gauge location and discharge flow reading which must be surpassed prior to withdrawals. Additionally, DEP has established a minimum passby flow at the withdrawal location which must also be surpassed prior to withdrawals. These thresholds are considered terms of the permit and are enforceable as such.

DEP is aware that some intake points will be used for mutiple wells and well sites. In these cases, the thresholds set by the Water Management Plan are to be interepreted as total withdrawal limits for each location over the specified date range regardless of how many wells are supported by that intake.

For all purchased water intakes, determinations of water availability are made at the original source intake location. It is the responsibility of the Oil and Gas Operator, not the seller, to cease withdrawal of water from the seller when flows are less than the minimum gauge reading at the stream gauge referenced by the Water Management Plan in order to protect stream uses.

Note that the determinations made herein are based on the best available data, but it is impossible to predict water availability in the future. While the DEP has carefully established these minimum withdrawal thresholds, it remains the operator's responsibility to protect aquatic life at all times. Approval to withdrawal is contingent upon permission from the land owner. It is the responsibility of the operator to secure and maintain permission prior to any withdrawals.

The operator is reminded that 24-48 hours prior to withdrawing (or purchasing) water, DEP must be notified by email at DEP.water.use@wv.gov.

APPROVED SEP 2 0 2013

Source Summary

WMP-01448

API Number: 047-051-01677 Operator: Noble Energy, Inc
SHL23HHS

Stream/River

Source Wheeling Creek Pump Station 1 @ CNX Land Resources Marshall Owner: Consol Energy

 Start Date
 End Date
 Total Volume (gal)
 Max. daily purchase (gal)
 Intake Latitude:
 Intake Longitude:

 8/21/2013
 8/21/2014
 10,164,000
 39.95205
 -80.56189

Regulated Stream? Ref. Gauge ID: 3111955 Wheeling Creek near Majorsville, WV

Max. Pump rate (gpm): 1,000 Min. Gauge Reading (cfs): 18.23 Min. Passby (cfs) 16.63

DEP Comments:

Source Wheeling Creek Pump Station 2 @ CNX Land Resources Marshall Owner: CNX Land Resources, Inc.

 Start Date
 End Date
 Total Volume (gal)
 Max. daily purchase (gal)
 Intake Latitude:
 Intake Longitude:

 8/21/2013
 8/21/2014
 10,164,000
 39.949578
 -80.531256

Regulated Stream? Ref. Gauge ID: 3111955 Wheeling Creek near Majorsville, WV

Max. Pump rate (gpm): 1,000 Min. Gauge Reading (cfs): 18.23 Min. Passby (cfs) 16.24

DEP Comments:

Source Summary

WMP-01448

API Number:

047-051-01677

Operator:

Noble Energy, Inc

SHL23HHS

Purchased Water

West Virginia American Water - Weston Water Treatme · Source

Lewis

Owner:

West Virginia American

Water

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

8/21/2013

8/21/2014

10,164,000

500,000

Regulated Stream? Stonewall Jackson Dam Ref. Gauge ID:

3061000

WEST FORK RIVER AT ENTERPRISE, WV

Max. Pump rate (gpm):

Min. Gauge Reading (cfs):

170.57

Min. Passby (cfs)

DEP Comments:

Bethlehem Water Department Source

Ohio

Owner:

Bethlehem Water

Department

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

8/21/2013

8/21/2014

10,164,000

200,000

9999999

✓ Regulated Stream?

Max. Pump rate (gpm):

Ohio River Min. Flow Ref. Gauge ID:

Min. Gauge Reading (cfs):

Min. Passby (cfs)

Ohio River Station: Willow Island Lock & Dam

DEP Comments:

Bethlehem Water Department purchases all its water from the City of Wheeling. Thresholds are set based on the location of the City of Wheeling's raw water intake.

6,468.00

Source

Wellsburg Water Department

Brooke

Owner:

Wellsburg Water

Department

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

8/21/2013

8/21/2014

10,164,000

200,000

Ohio River Station: Willow Island Lock & Dam

✓ Regulated Stream?

Max. Pump rate (gpm):

Ohio River Min. Flow Ref. Gauge ID: 9999999

Min. Passby (cfs)

Min. Gauge Reading (cfs):

6,468.00

DEP Comments:

This alluvial groundwater well is, to some extent, under the influence of the Ohio River.

Please adhere to stated minimum flow requirements on the Ohio River for

withdrawals. http://www.erh.noaa.gov/er/ohrfc/flows.shtml

Moundsville Water Board Marshall **Moundsville Water** Source Owner: **Treatment Plant** Start Date **End Date** Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: 8/21/2013 8/21/2014 10,164,000 2,000,000 Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 999999 Ohio River Station: Willow Island Lock & Dam Max. Pump rate (gpm): Min. Gauge Reading (cfs): 6,468.00 Min. Passby (cfs) **DEP Comments:** This alluvial groundwater well is, to some extent, under the influence of the Ohio River. Please adhere to stated minimum flow requirements on the Ohio River for withdrawals. http://www.erh.noaa.gov/er/ohrfc/flows.shtml Source **Dean's Water Service** Ohio Owner: **Dean's Water Service** Start Date **End Date** Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: 8/21/2013 8/21/2014 10,164,000 600,000 ✓ Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 999999 Ohio River Station: Willow Island Lock & Dam Max. Pump rate (gpm): Min. Gauge Reading (cfs): 6,468.00 Min. Passby (cfs) **DEP Comments:** Source **Wheeling Water Department** Ohio Owner: **Wheeling Water Department** Start Date **End Date** Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: 8/21/2013 8/21/2014 10,164,000 17,500 Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 999999 Ohio River Station: Willow Island Lock & Dam Max. Pump rate (gpm): Min. Gauge Reading (cfs): 6,468.00 Min. Passby (cfs)

Refer to the specified sation on the National Weather Service's Ohio River forecasts at

the following website: http://www.erh.noaa.gov/ohrfc//flows.shtml

DEP Comments:

Source Ohio County PSD Ohio Owner: Ohio county PSD

Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude:

8/21/2013 8/21/2014 10,164,000 720,000 - -

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm): Min. Gauge Reading (cfs): 6,468.00 Min. Passby (cfs)

DEP Comments: Refer to the specified station on the National Weather Service's Ohio River forecast

website: http://www.erh.noaa.gov/ohrfc//flows.shtml

Source Summary

WMP-01448

API Number:

047-051-01677

Operator:

Noble Energy, Inc.

SHL23HHS

Ground Water

Shoemaker Groundwater Well #3 Source

Marshall

Owner:

Consol Energy

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

8/21/2013

10.164,000

40.0222

-80.73389

✓ Regulated Stream?

8/21/2014

999999

Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm):

800

Ohio River Min. Flow

Min. Gauge Reading (cfs):

Ref. Gauge ID:

6,468.00

Min. Passby (cfs)

DEP Comments:

This alluvial groundwater well is, to some extent, under the influence of the Ohio River.

Please adhere to stated minimum flow requirements on the Ohio River for

withdrawals. http://www.erh.noaa.gov/er/ohrfc/flows.shtml

Source

Shoemaker Groundwater Well #4

Marshall

Owner:

Consol Energy

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

8/21/2013

8/21/2014

10,164,000

40.022293

-80.733586

Regulated Stream?

Ohio River Min. Flow Ref. Gauge ID:

999999

Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm):

800

Min. Gauge Reading (cfs):

6,468.00

Min. Passby (cfs)

DEP Comments:

This alluvial groundwater well is, to some extent, under the influence of the Ohio River.

Please adhere to stated minimum flow requirements on the Ohio River for

withdrawals. http://www.erh.noaa.gov/er/ohrfc/flows.shtml

Source

Shoemaker Groundwater Well #5

Marshall

Owner:

Consol Energy

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

8/21/2013

8/21/2014

10,164,000

40.021256

-80.734568

✓ Regulated Stream?

Ohio River Min. Flow

Ref. Gauge ID:

999999

Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm):

800

Min. Gauge Reading (cfs):

6,468.00

Min. Passby (cfs)

DEP Comments:

This alluvial groundwater well is, to some extent, under the influence of the Ohio River.

Please adhere to stated minimum flow requirements on the Ohio River for

withdrawals. http://www.erh.noaa.gov/er/ohrfc/flows.shtml

Source Shoemaker Groundwater Well #6 Marshall Owner: Consol Energy

Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude:

8/21/2013 8/21/2014 10,164,000 40.02076 -80.73397

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm): 800 Min. Gauge Reading (cfs): 6,468.00 Min. Passby (cfs)


DEP Comments: This alluvial groundwater well is, to some extent, under the influence of the Ohio River.

Please adhere to stated minimum flow requirements on the Ohio River for

withdrawals. http://www.erh.noaa.gov/er/ohrfc/flows.shtml

SHL23HHS		
Source ID: 24315 Source Name Shoemaker Groundwater Well #3 Consol Energy	Source Editions.	0222 .73389
HUC-8 Code: 5030106 Drainage Area (sq. mi.): 25000 County: Marshall Endangered Species? Mussel Stream? Trout Stream? Tier 3? Regulated Stream? Ohio River Min. Flow Proximate PSD? Gauged Stream?	Anticipated withdrawal start date: Anticipated withdrawal end date: Total Volume from Source (gal): Max. Pump rate (gpm): Max. Simultaneou Max. Truck pump ra	
Reference Gaug 9999999 Ohio River Station: Willow Island Drainage Area (sq. mi.) 25,000.00	I Lock & Dam Gauge Threshold (cfs):	6468


Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	45,700.00		
2	49,200.00	18.	30
3	65,700.00		
4	56,100.00		P-81
5	38,700.00		
6	24,300.00	14	-
7	16,000.00	(5)	1.5
8	13,400.00	1.4	(3)
9	12,800.00	1.40	1.2
10	15,500.00	-	-
11	26,300.00		
12	41,300.00		

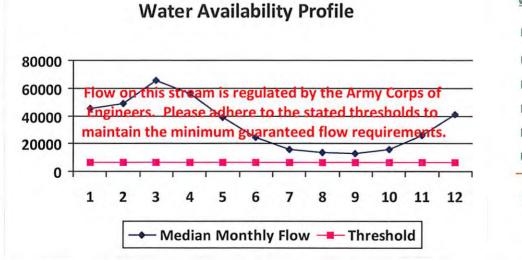

0.00
0.00
1.78
0.00
0.00
-

WMP-01448	API/ID Number: 047-05	1-01677 Operator: Noble E	nergy, Inc
	SHL23HHS		
Source ID: 24316 Source Name Sho	emaker Groundwater Well #4	Source Latitude: 40.	022293
Cor	sol Energy	Source Longitude: -80	.733586
	000 County: Marshall	Anticipated withdrawal start date: Anticipated withdrawal end date:	8/21/2013 8/21/2014
☐ Endangered Species? ✓ Mussel☐ Trout Stream? ☐ Tier 3?	Stream?	Total Volume from Source (gal):	10,164,000
✓ Regulated Stream? Ohio River	Min. Flow	Max. Pump rate (gpm):	800
Proximate PSD?		Max. Simultaneou	is Trucks:
✓ Gauged Stream?		Max. Truck pump ra	ite (gpm)
Reference Gaug 9999999	Ohio River Station: Willow Isla	nd Lock & Dam	
Drainage Area (sq. mi.) 25,	000.00	Gauge Threshold (cfs):	6468

Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	45,700.00		-
2	49,200.00		2
3	65,700.00	141	
4	56,100.00		
5	38,700.00	ile i	
6	24,300.00		4
7	16,000.00	*	-
8	13,400.00		¥
9	12,800.00		
10	15,500.00		-
11	26,300.00		-
12	41,300.00		

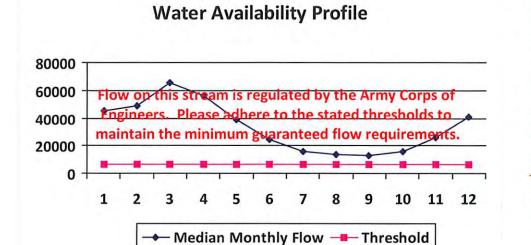

Base Threshold (cfs):	-
Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	1.78
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00


Water Availability Assessment of Location

Min. Gauge Reading (cfs):

Passby at Location (cfs):



Water Availability Profile

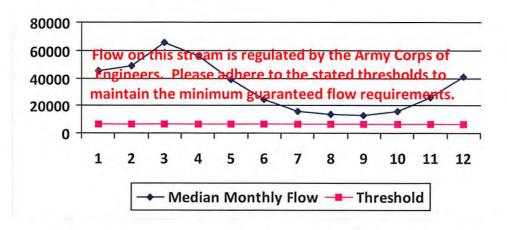

Water Availability Assessment of Location

Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	1.78
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

7

8

9

10

11

12

16,000.00

13,400.00

12,800.00


15,500.00

26,300.00

41,300.00



Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	45,700.00	-	
2	49,200.00	8	-
3	65,700.00		
4	56,100.00		
5	38,700.00	9.	- 4
6	24,300.00	41	
7	16,000.00	-	
8	13,400.00	9-1	
9	12,800.00		14
10	15,500.00	4.1	. \$
11	26,300.00		
12	41,300.00	-	1.4

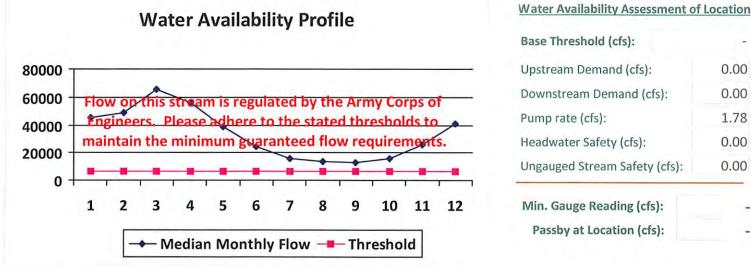

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the

proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

0.00

0.00

1.78


0.00

0.00

API/ID Number: WMP-01448 047-051-01677 Operator: Noble Energy, Inc SHL23HHS West Virginia American Water - Weston Water Treat Source ID: 24319 Source Name Source Latitude: -West Virginia American Water Source Longitude: -5020002 HUC-8 Code: Anticipated withdrawal start date: 8/21/2013 104.83 Lewis Drainage Area (sq. mi.): County: Anticipated withdrawal end date: 8/21/2014 **Endangered Species?** ✓ Mussel Stream? Total Volume from Source (gal): 10,164,000 Trout Stream? ☐ Tier 3? Max. Pump rate (gpm): Stonewall Jackson Dam Regulated Stream? Proximate PSD? Weston WTP Max. Simultaneous Trucks: Max. Truck pump rate (gpm) Gauged Stream? Reference Gaug 3061000 WEST FORK RIVER AT ENTERPRISE, WV 759.00 Drainage Area (sq. mi.) Gauge Threshold (cfs): 234

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	321.23		-
2	361.67	Q.	
3	465.85		-
4	266.43		
5	273.47	4	
6	137.03		
7	88.78	6	
8	84.77	8	-
9	58.98	4.1	+
10	57.83	4	1.5
11	145.12		-
12	247.76		



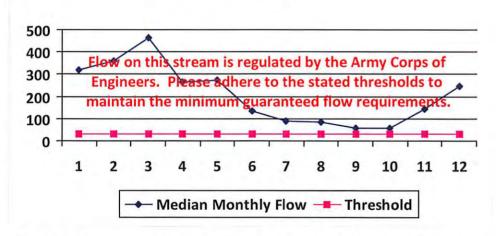

Water Availability Assessment of Location

Base Threshold (cfs):	-
Upstream Demand (cfs):	24.32
Downstream Demand (cfs):	0.00
Pump rate (cfs):	
Headwater Safety (cfs):	8.08
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	-
Passby at Location (cfs):	-



80000 60000 eam is regulated by the Army Corps of 40000 maintain the minimum guaranteed flow requirements. 20000

3 5 6 9 2 4 7 8 10 11 Median Monthly Flow — Threshold

Base Threshold (cfs): Upstream Demand (cfs): Downstream Demand (cfs): Pump rate (cfs): Headwater Safety (cfs): 0.00 Ungauged Stream Safety (cfs): 0.00 Min. Gauge Reading (cfs):

Passby at Location (cfs):

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.


12

1



Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	45,700.00	4.	
2	49,200.00	-,	
3	65,700.00	-	
4	56,100.00		
5	38,700.00	1.241	4
6	24,300.00	.9.	- G
7	16,000.00		-
8	13,400.00	¥.,	9.
9	12,800.00	-	
10	15,500.00	4.1	-4
11	26,300.00	-	(4)
12	41,300.00	*	

Water Availability Profile

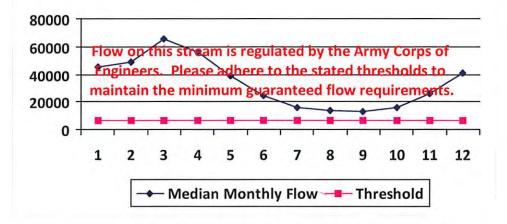

Water Availability Assessment of Location

Upstream Demand (cfs):	
Downstream Demand (cfs):	
Pump rate (cfs):	
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00

Source Detail API/ID Number: WMP-01448 047-051-01677 Operator: Noble Energy, Inc SHL23HHS Moundsville Water Board 24322 Source ID: Source Name Source Latitude: -Moundsville Water Treatment Plant Source Longitude: -5030106 HUC-8 Code: Anticipated withdrawal start date: 8/21/2013 25000 Marshall Drainage Area (sq. mi.): County: Anticipated withdrawal end date: 8/21/2014 **Endangered Species?** ✓ Mussel Stream? 10,164,000 Total Volume from Source (gal): Trout Stream? ☐ Tier 3? Ohio River Min. Flow Max. Pump rate (gpm): Regulated Stream? Max. Simultaneous Trucks: Proximate PSD? Max. Truck pump rate (gpm) Gauged Stream? Reference Gaug 9999999 Ohio River Station: Willow Island Lock & Dam 25,000.00 6468 Drainage Area (sq. mi.) Gauge Threshold (cfs): Median Estimated Threshold monthly flow Available (+ pump Month water (cfs) (cfs) 45,700.00 2 49,200.00 3 65,700.00 4 56,100.00 38,700.00 5 6 24,300.00 7 16,000.00 8 13,400.00 9 12,800.00 10 15,500.00 11 26,300.00 12 41,300.00 Water Availability Assessment of Location Water Availability Profile Base Threshold (cfs): 80000 Upstream Demand (cfs): Downstream Demand (cfs): 60000 eam is regulated by the Army Corps of Pump rate (cfs): there to the stated thresholds to 40000

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

8

7

Median Monthly Flow — Threshold

9

11

10

12

maintain the minimum guaranteed flow requirements.

5

0.00

0.00

Headwater Safety (cfs):

Ungauged Stream Safety (cfs):

Min. Gauge Reading (cfs): Passby at Location (cfs):


20000

0

1

2

3

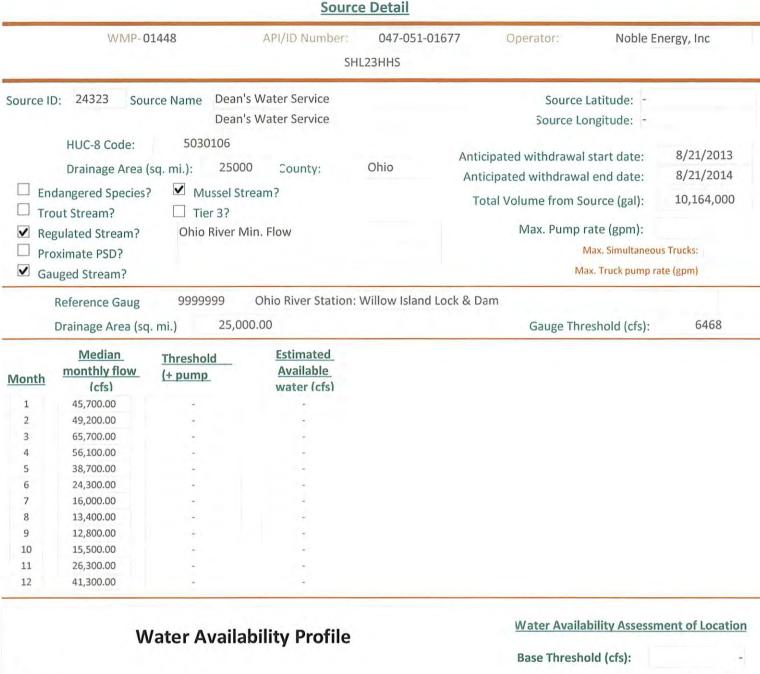


80000 Upstream Demand (cfs): 0.00 Downstream Demand (cfs): 0.00 60000 eam is regulated by the Army Corps of Pump rate (cfs): 40000 maintain the minimum Headwater Safety (cfs): 0.00 guaranteed flow requirements. 20000 Ungauged Stream Safety (cfs): 0.00 3 5 9 1 2 6 10 11 12 Min. Gauge Reading (cfs): 7 Passby at Location (cfs): Median Monthly Flow — Threshold



3 65,700.00 4 56,100.00 5 38,700.00 6 24,300.00 7 16.000.00 8 13,400.00 9 12,800.00 10 15,500.00 11 26,300.00 12 41,300.00

Water Availability Profile

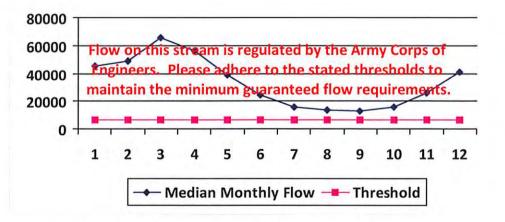

Water Availability Assessment of Location

Base Threshold (cfs):

Upstream Demand (cfs):

Downstream Demand (cfs):

Pump rate (cfs):


Headwater Safety (cfs):

Ungauged Stream Safety (cfs):

O.00

Min. Gauge Reading (cfs):

Passby at Location (cfs):

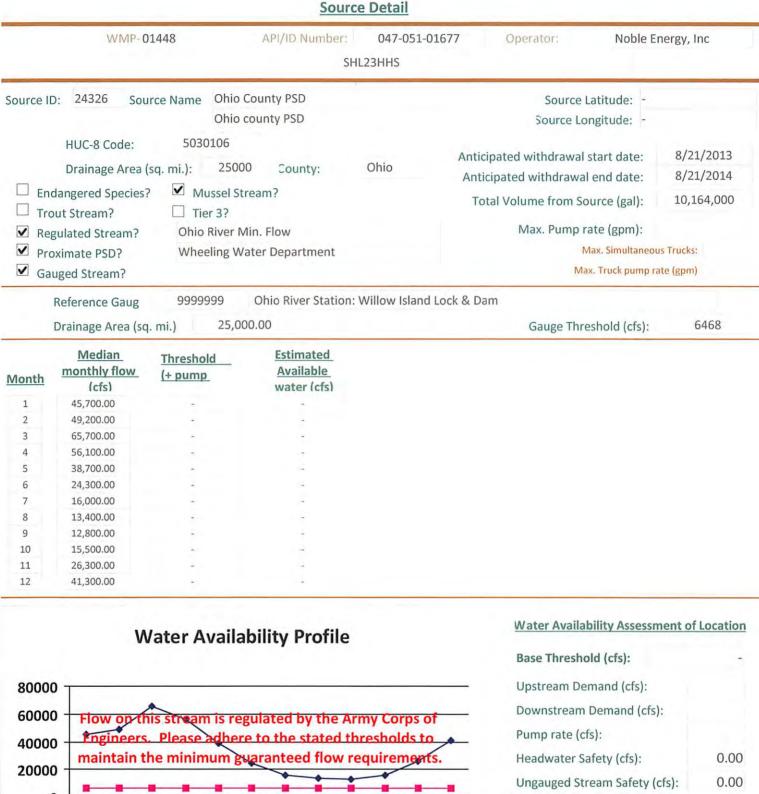

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

9

10

11

12

Min. Gauge Reading (cfs): Passby at Location (cfs):

1

2

3


5

6

Median Monthly Flow — Threshold

WMP-01448	API/ID Number;	047-051-01677	Operator:	Noble En	ergy, Inc
	SHL	23HHS			
Source ID: 24313 Source Name Whee	ling Creek Pump Statio	on 1 @ CNX Land	Resour Source L	atitude: 39.9	95205
Conso	l Energy		Source Lor	ngitude: -80.	56189
HUC-8 Code: 5030106 Drainage Area (sq. mi.): 156.0	6 County: N	1arshall	Anticipated withdrawal s	tart date:	8/21/2013
Dramage / new (eq. mm).	iaisiiaii	Anticipated withdrawal	end date:	8/21/2014	
☐ Endangered Species? ✓ Mussel Stream? ☐ Trout Stream? ☐ Tier 3?			Total Volume from Sou	urce (gal):	10,164,000
☐ Regulated Stream?			Max. Pump ra	nte (gpm):	1,000
☐ Proximate PSD?			M	ax. Simultaneous	Trucks: 0
✓ Gauged Stream?			Max	. Truck pump rat	te (gpm)
Reference Gaug 3111955	Wheeling Creek near	r Majorsville, WV			
Drainage Area (sq. mi.) 152	.00		Gauge Thre	shold (cfs):	16
Median Threshold Month monthly flow (+ pump	Estimated Available				


Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)	
1	0.00	18.66		
2	0.00	18.66		
3	0.00	18.66	- 0 - 2	
4	0.00	18.66	-	
5	0.00	18.66	÷	
6	0.00	18.66	4	
7	0.00	18.66		
8	0.00	18.66	2	
9	0.00	18.66		
10	0.00	18.66	2.	
11	0.00	18.66	÷	
12	0.00	18.66	7-8	

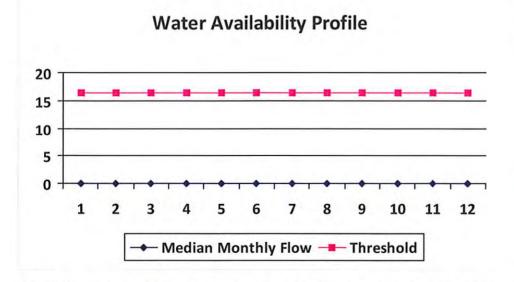

Min. Gauge Reading (cfs): Passby at Location (cfs):	18.23 16.43
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	0.00
Pump rate (cfs):	2.23
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	16.43

WMP-014	48 API/ID Numl	oer: 047-051-0	Operator:	Noble Energ	gy, Inc
		SHL23HHS			
ource ID: 24314 Source	e Name Wheeling Creek Pum CNX Land Resources,			ce Latitude: 39.949 Longitude: -80.533	
HUC-8 Code: Drainage Area (sq Endangered Species? Trout Stream? Regulated Stream?	5030106 . mi.): 152.4 County: ✓ Mussel Stream? ☐ Tier 3?	Marshall	Anticipated withdraw Anticipated withdray Total Volume from	val start date: 8	3/21/2013 3/21/2014 .0,164,000 1,000
✓ Proximate PSD?✓ Gauged Stream?			Max. Truck pump rate (gpm)		

onth	Median monthly flow (cfs)	Threshold (+ pump	<u>Estimated</u> <u>Available</u> water (cfs)
1	0.00	18.27	-
2	0.00	18.27	4
3	0.00	18.27	1 ×
4	0.00	18.27	*
5	0.00	18.27	-
6	0.00	18.27	-
7	0.00	18.27	14
8	0.00	18.27	9
9	0.00	18.27	191
10	0.00	18.27	14.
11	0.00	18.27	1.5
12	0.00	18.27	

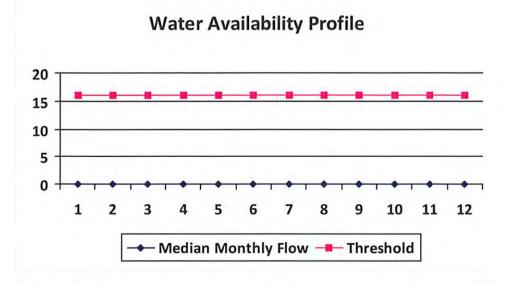

Min. Gauge Reading (cfs): Passby at Location (cfs):	18.23 16.04
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	0.00
Pump rate (cfs):	2.23
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	16.04

west virginia department of environmental protection



Water Management Plan: Secondary Water Sources



WMP-01448

API/ID Number

047-051-01677

Operator:

Noble Energy, Inc

SHL23HHS

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Multi-site impoundment

Source ID: 24327 Source Name

SHL #1 Centralized Freshwater Impoundment

Source start date:

8/21/2013

Source end date:

8/21/2014

Source Lat:

39.979696

Source Long: -80.579465

County

Marshall

Max. Daily Purchase (gal)

Total Volume from Source (gal):

10,164,000

DEP Comments:

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-200

WMP-01448 API/ID Number 047-051-01677 Operator: Noble Energy, Inc

SHL23HHS

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 24328 Source Name SHL #2 Centralized Waste Pit Source start date: 8/21/2013

Source end date: 8/21/2014

Source Lat: 39.966973 Source Long: -80.561377 County Marshall

Max. Daily Purchase (gal) Total Volume from Source (gal): 10,164,000

DEP Comments: WV51-WPC-00001

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-201

Source ID: 24329 Source Name SHL #3 Centralized Waste Pit Source start date:

ource start date: 8/21/2013

Source end date: 8/21/2014

Source Lat: 39.974133 Source Long: -80.55527 County Marshall

Max. Daily Purchase (gal) Total Volume from Source (gal): 10,164,000

DEP Comments: WV51-WPC-00002

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-202

WMP-01448 API/ID Number 047-051-01677 Operator: Noble Energy, Inc.

SHL23HHS

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 24330 Source Name SHL #4 Centralized Waste Pit 8/21/2013 Source start date:

8/21/2014 Source end date:

Source end date:

39.963284 -80.562743 Marshall Source Lat: Source Long: County

10,164,000 Max. Daily Purchase (gal) Total Volume from Source (gal):

WV51-WPC-00003 DEP Comments:

Source Lat:

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-204

8/21/2014

Purchased Water

Bridgeport Ohio Water Department Source ID: 24324 Source Name 8/21/2013 Source start date: Public Water Provider

40.08348

Source Long: County

Max. Daily Purchase (gal) 200,000 Total Volume from Source (gal): 10,164,000

DEP Comments: Please ensure that purchases from this source are approved by, and completed in

accordance with, requirements set forth by the State of Ohio Department of

-80.736488

Environmental Protection.

WMP-01448 API/ID Number 047-051-01677 Operator: Noble Energy, Inc

SHL23HHS

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Recycled Frac Water


Source ID: 24331 Source Name Various Source start date: 8/21/2013

Source end date: 8/21/2014

Source Lat: Source Long: County

Max. Daily Purchase (gal) Total Volume from Source (gal): 10,164,000

DEP Comments: Sources include, but are not limited to, the SHL17 and SHL23 well pads.

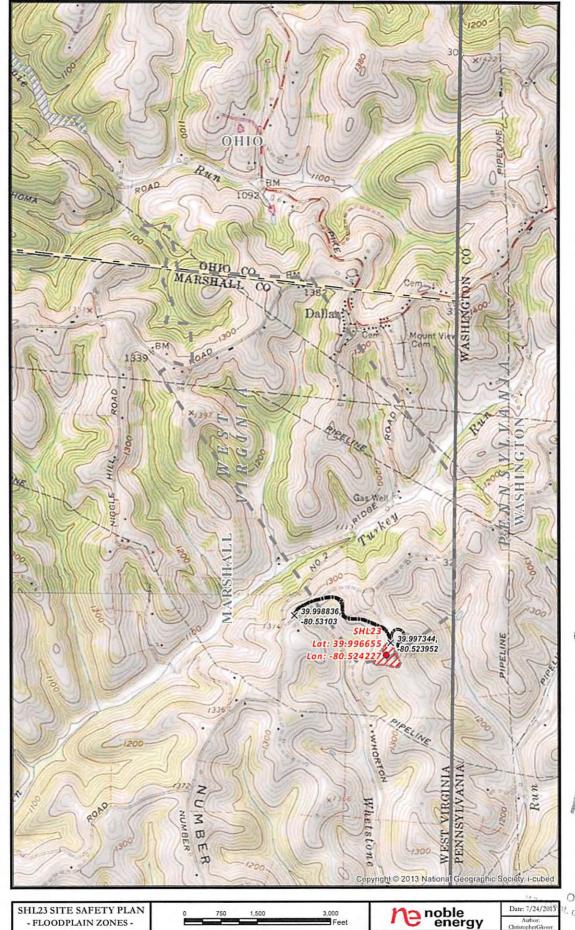

rieceive

AUG - 2 20%

Office of Oil and Gas t. of Environmental Prote.

1/22/2013

Disclaimer: All data is licensed for use by Noble Energy Inc. use only.

Scale 1" = 1,500

X Road Intersection Floodplain States

Proposed Unit Co

