

### west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax Earl Ray Tomblin, Governor Randy C. Huffman, Cabinet Secretary www.dep.wv.gov

December 12, 2013

#### WELL WORK PERMIT

#### Horizontal 6A Well

This permit, API Well Number: 47-5101687, issued to NOBLE ENERGY, INC., is evidence of permission granted to perform the specified well work at the location described on the attached pages and located on the attached plat, subject to the provisions of Chapter 22 of the West Virginia Code of 1931, as amended, and all rules and regulations promulgated thereunder, and to all conditions and provisions outlined in the pages attached hereto. Notification shall be given by the operator to the Oil and Gas Inspector at least 24 hours prior to the construction of roads, locations, and/or pits for any permitted work. In addition, the well operator shall notify the same inspector 24 hours before any actual well work is commenced and prior to running and cementing casing. Spills or emergency discharges must be promptly reported by the operator to 1-800-642-3074 and to the Oil and Gas inspector.

Please be advised that form WR-35, Well Operators Report of Well Work is to be submitted to this office within 90 days completion of permitted well work, as should form WR-34 Discharge Monitoring Report within 30 days of discharge of pits, if applicable. Failure to abide by all statutory and regulatory provisions governing all duties and operations hereunder may result in suspension or revocation of this permit and, in addition, may result in civil and/or criminal penalties being imposed upon the operators.

In addition to the applicable requirements of this permit, and the statutes and rules governing oil and gas activity in WV, this permit may contain specific conditions which must be followed. Permit conditions are attached to this cover letter.

Per 35CSR-4-5.2.g this permit will expire in two (2) years from the issue date unless permitted well work is commenced. If there are any questions, please feel free to contact me at (304) 926-0499 ext. 1654.

James Martin

Chief

Operator's Well No: WEB22AHS

Farm Name: TIM M. TURLEY AND TAMMY JE

API Well Number: 47-5101687

Permit Type: Horizontal 6A Well

Date Issued: 12/12/2013

API Number: <u>51-01687</u>


### **PERMIT CONDITIONS**

West Virginia Code § 22-6A-8(d) allows the Office of Oil and Gas to place specific conditions upon this permit. Permit conditions have the same effect as law. Failure to adhere to the specified permit conditions may result in enforcement action.

#### **CONDITIONS**

- 1. This proposed activity may require permit coverage from the United States Army Corps of Engineers (USACOE). Through this permit, you are hereby being advised to consult with USACOE regarding this proposed activity.
- 2. If the operator encounters an unanticipated void, or an anticipated void at an unanticipated depth, the operator shall notify the inspector within 24 hours. Modifications to the casing program may be necessary to comply with W. Va. Code § 22-6A-5a (12), which requires drilling to a minimum depth of thirty feet below the bottom of the void, and installing a minimum of twenty (20) feet of casing. Under no circumstance should the operator drill more than fifty (50) feet below the bottom of the void or install less than twenty (20) feet of casing below the bottom of the void.
- 3. When compacting fills, each lift before compaction shall not be more than 12 inches in height, and the moisture content of the fill material shall be within limits as determined by the Standard Proctor Density test of the actual soils used in specific engineered fill, ASTM D698, Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort, to achieve 95 % compaction of the optimum density. Each lift shall be tested for compaction, with a minimum of two tests per lift per acre of fill. All test results shall be maintained on site and available for review.
- 4. Operator shall install signage per § 22-6A-8g (6) (B) at all source water locations included in their approved water management plan within 24 hours of water management plan activation.
- 5. Oil and gas water supply wells will be registered with the Office of Oil and Gas and all such wells will be constructed and plugged in accordance with the standards of the Bureau for Public Health set forth in its Legislative rule entitled *Water Well Regulations*, 64 C.S.R. 19. Operator is to contact the Bureau of Public Health regarding permit requirements. In lieu of plugging, the operator may transfer the well to the surface owner upon agreement of the parties. All drinking water wells within fifteen hundred feet of the water supply well shall be flow tested by the operator upon request of the drinking well owner prior to operating the water supply well.
- 6. Pursuant to the requirements pertaining to the sampling of domestic water supply wells/springs the operator shall, no later than thirty (30) days after receipt of analytical data provide a written copy to the Chief and any of the users who may have requested such analyses.
- 7. If any explosion or other accident causing loss of life or serious personal injury occurs in or about a well or well work on a well, the well operator or its contractor shall give notice, stating the particulars of the explosion or accident, to the oil and gas inspector and the Chief, within 24 hours of said accident.
- 8. During the casing and cementing process, in the event cement does not return to the surface, the oil and gas inspector shall be notified within 24 hours.


### Map from a Flex Viewer application

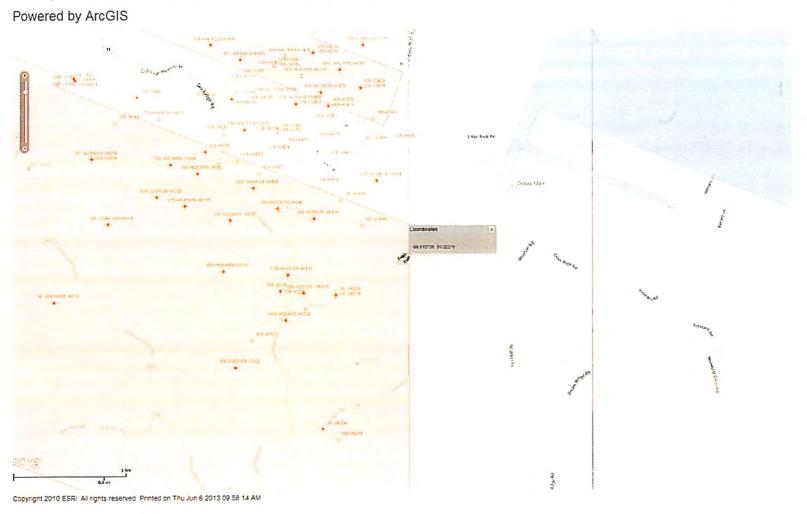

RECEIVED
Office of Oil and Gas

SEP 252013

WV Department of Environmental F12(13/2013

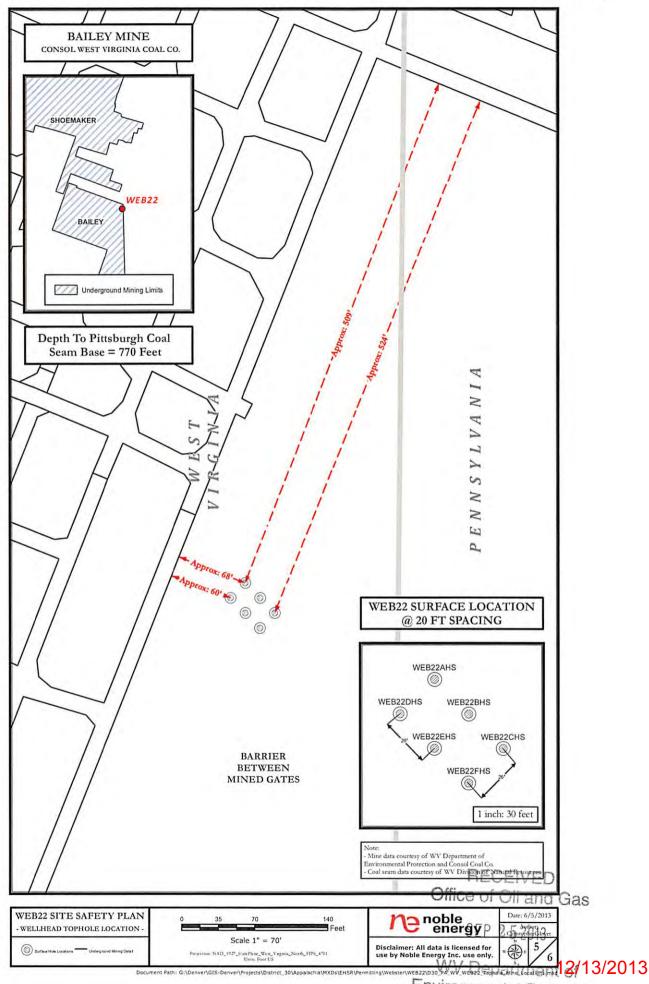

# STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS WELL WORK PERMIT APPLICATION

1) Well Operator:	Noble (	Energy,	nc.	494501907	Marshall	Webster	Majorsville
•				Operator ID	County	District	Quadrangle
2) Operator's Well	Number:	WEB 22 A	HS	w	ell Pad Nam	e: WEB 22	<del></del>
3 Elevation, curren	t ground:	1325'	Ele	vation, proposed p	ost-construct	tion:	1340.25'
4) Well Type: (a) (	Gas _		Oil	Underground	Storage		
	Other _						
(b) I		Shallow		Deep	<del> </del>		
		Horizontal					
5) Existing Pad? Yo	es or No:	No					
6) Proposed Target  Target-Marcellus, Dep			•	ed Thicknesses and	d Associated	Pressure(s):	
7) Proposed Total V	/ertical De	pth: 6	913'				
8) Formation at Tot	al Vertical	Depth:	Marcellus				
9) Proposed Total N	Measured I	Depth:	14,938'				
10) Approximate F	resh Water	Strata Dep	oths: <u>21</u>	2', 295'			
11) Method to Dete	rmine Fres	sh Water D	epth: o	ffset Well Data	* · * · · · · · · · · · · · · · · · · ·		
12) Approximate S	altwater D	epths:	None noted on	Offsets			
13) Approximate C	oal Seam I	Depths:	761' to 771' F	Pittsburgh			
14) Approximate D	epth to Po	ssible Voic	l (coal mine,	karst, other):	None anticip	pated, drilling in soli	d block-see mine maps
15) Does proposed adjacent to an a				irectly overlying ond depth of mine:	Near Ba	iley Mine at ap	oprox 770' Depth
16) Describe propo	sed well w	ork: _	rill the vertical dep	th to the Marcellus at an e	estimated total vert	ical depth of appro	ximately 6,913 feet.
Drill Horizontal leg - s	timulate and p	roduce the Ma	rcellus Formation	•			
f we should encounter an	unanticipated voi	id we will install c	asing at a minimum o	of 20' below the void but not n	nore than 100' below	the void, set a bask	et and grout to surface.
17) Describe fractu The stimulation will be m	-	-		II. Stage spacing is depende	nt upon engineering	design. Slickwater	fracturing technique will
be utilized on each sta	age using sand	d, water, and c	hemicals. See at	tached list.			
18) Total area to be	disturbed	, including	roads, stockp	ile area, pits, etc, (	(acres):	18.5 acres	
19) Armide of Cal	FED for w	vell pad on	y, less access	road (acres):	8.45 acres	S	
	ALL CAC	5					Page 1 of 3

Environ Section of

12/13/2013

WW - 6B (3/13)

### 20)

### CASING AND TUBING PROGRAM

ТҮРЕ	Size	New or Used	Grade	Weight per ft.	FOOTAGE: For Drilling	INTERVALS: Left in Well	CEMENT: Fill -up (Cu. Ft.)
Conductor	30"	N	LS	117#	40'	40'	CTS
Fresh Water	20"	N	LS	94#	400'	400'	CTS
Coal	13 3/8"	N	J-55	54.5#	1220'	1220'	CTS
Intermediate	9 5/8"	N	J-55	36#	3356'	3356'	CTS
Production	5 1/2"	N	P110	20#	14,938'	14,938'	TOC 200' above 9.62 shoe
Tubing							
Liners							

TYPE	Size	Wellbore Diameter	Wall Thickness	Burst Pressure	Cement Type	Cement Yield
Conductor	30"	36"	0.375		Type 1/Class A	1.2
Fresh Water	20"	26"	.438	2110	Type 1/Class A	1.2
Coal	13 3/8"	17 1/2"	.380	2730	Type 1/Class A	1.2
Intermediate	9 5/8"	12 3/8"	.352	3520	Type 1/Class A	1.19
Production	5 1/2"	8 3/4" & 8 1/2"	.361	12,640	Type 1/Class A	1.27
Tubing						
Liners						

**PACKERS** 

Kind:	
Sizes:	
Depths Set:	( ) SECEIVED

(5 0) SEP 25 2013

Page 2 of 3 WV Department of Environmental Pro12/13/2013 WW-6B (9/13)

19) Describe proposed well work, including the drilling and plugging back of any pilot hole:
Drill the vertical depth to the Marcellus at an estimated total vertical depth of approximately 6,913 feet. Drill Horizontal leg-stimulate and produce the Marcellus Formation. If we should encounter an unanticipated void we will install casing at a minimum of 20' below the void but not more than 100' below the void, set a basket and grout to surface.
20) Describe fracturing/stimulating methods in detail, including anticipated max pressure and max rate:
The stimulation will be multiple stages divided over the lateral length of the well. Stage spacing is dependent upon engineering design. Slickwater fracturing technique will be utilized on each stage using sand, water, and chemicals. See attached list. Maximum pressure not to exceed 10,000 lb.
21) Total Area to be disturbed, including roads, stockpile area, pits, etc., (acres):
22) Area to be disturbed for well pad only, less access road (acres):
23) Describe centralizer placement for each casing string:
No centralizers will be used with conductor casing. Surface casing will have bow spring centralizers on first 2 joints then every third joint to 100' from surface. Intermediate casing will have bow spring centralizers on first 2 joints then every third joint to 100' from surface. Production string will have a rigid bow spring every joint to KOP, rigid bow spring every third joint from KOP to top of cement.
24) Describe all cement additives associated with each cement type:
Conductor-1.15% CaCl *Surface and Coal (Intermediate)- Class A Portland Cement CaCl 2%, 2% Accelerator, 0.2% Antifoam and 0.125#/sk Flake. Excess Yield=1.18 Production- 14.8 ppg class A 25:75:0 System +2.6% Cement extender, 0.7% Fluid Loss additive, 0.45% high temp retarder, 0.2% friction reducer 15% Excess Yield=1.27 TOC greater or equal to

### 25) Proposed borehole conditioning procedures:

\*Surface and Coal string WVDEP approved variance attached.

200' above 9.625" shoe.

Conductor-The hole is drilled w/air and casing is run on air. Apart from insuring the hole is clean via air circulation at TD, there are no other conditioning procedures. Surface-The hole is drilled w/air and casing is run on air. Fill with KCI water once drilled to TD. Once casing is at setting depth, circulate a minimum of one hole volume prior to pumping cement Coal-The hole is drilled and cased w/air or on Freshwater based mud. Once casing is at setting depth, the hole is filled w/KCI water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate-Once surface casing is set and cemented, intermediate hole is drilled either on air or SOBM and filled with KCI water once drilled to TD. Production-The hole is drilled with SOBM and once to TD, circulated at maximum allowable pump rate for at least 6x bottoms up. Once on bottom with casing, circulate a minimum of one hole volume prior to pumping cement.

\*Note: Attach additional sheets as needed.

Environmental Protection

	n	no e	ble nerg	ЗУ					DRILLING V WEB-22A-HS ( Macellus Sha Marshall C	(Marcellus HZ) le Horizontal	
						WEB-2	2A SHL	(Lat/Long)	(51985	52.69N, 1713925.73	E) (NAD27)
Ground E	levation		1325'		-	WEB-2	22A LP	(Lat/Long)	(51997	3.61N, 1713258.63	E) (NAD27)
Azı	m		325°		-	WEB-2	2A BHL	(Lat/Long)	(52617	6.75N, 1708915.14	E) (NAD27)
WELLBORE	DIAGRAM	HOLE	CASING	GEOLOGY	MD	TVD	MUD	CEMENT	CENTRALIZERS	CONDITIONING	COMMENTS
		36	30" 117#				AIR	To Surface	N/A	Ensure the hole is clean at TD.	Stabilize surface fill/soil, Conductor casing = 0.375" v
			E C. J. J. C.	Conductor	40	40				Fill with KCI water once	thickness
		24	20° 94#				AIR	15.6 ppg Type 1 + 2% CaCl, 0.25# Lost Circ 30% Excess	Centralized every 3 joints to surface	drilled to TD. Once casing is at setting depth, circulate a minimum of one hole	Surface casing = 0.438" wa thickness Burst=2730 psi
l x	×			Surface Casing	400	400		Yield = 1.18		volume prior to pumping cement.	Burst-2700 psi
			13-3/8* 54.5#				i i in	15.6 ppg Type 1 + 2% CaCl, 0.25# Lost Circ	Bow Spring on first 2 joints then every third	Fill with KCI water once drilled to TD. Once casing is at setting depth, circulate a	Intermediate casing = 0.380
×	×	17 1/2	J-55 BTC	Pittsburgh Coal	761	761	AIR	30% Excess Yield = 1,18	joint to 100' form	minimum of one hole	wall thickness Burst=2730 psi
		1		Int. Casing	871	871	-	Yield = 1.18	surface	volume prior to pumping cement.	
"x	X			Dunkard Sand	1405	1405		15.6ppg Class A		Fill with KCI water once	
				Big Lime	2007	2007		+0.4% Ret, 0.15% Disp, 0.2% AntiFoam,	Bow spring centralizers	drilled to TD. Once casing is	Casing to be ran 250' belo
×	×	12 3/8	9-5/8" 36# J-55 LTC	5th Sand Base	3106	3106	AIR	0.125#/sk Lost Circ 20% Excess Yield=1.19	every third joint to 100' feet from surface.	at setting depth, circulate a minimum of one hole volume prior to pumping	the 5th Sand, Intermediate casing = 0.352" wall thicknet Burst=3520 psi
		, 1		Int. Casing	3356	3356		To Surface		cement.	
×	X	-		Warren Sand		4567					
				Java		5240	8.0ppg -		Rigid Bow Spring every		
		8.75" Vertical		Angola		5456	9.0ppg SOBM	14.8ppg Class A 25:75:0	third joint from KOP to TOC		
				Rhinestreet		6088		System			
						2000		+2.6% Cement extender, 0.7% Fluid Loss		Once at TD, circulate at	201 201 201
			5-1/2"	Cashaqua		6523		additive, 0.45% high temp retarder, 0.2%		max allowable pump rate	Production casing = 0.361 wall thickness
X	X	8,75" Curve	20#	Middlesex		6622 6654	12.0ppg- 12.5ppg	friction reducer		for at least 6x bottoms up. Once on bottom with	Burst=12640 psi
		6.75 Curve	HCP-110 TXP BTC	West River Burkett		6710	SOBM	10% Excess	the section of	casing, circulate a minimum of one hole volume prior to	Note:Actual centralizer schedules may be change
				Tully Limestone		6734		Yield=1.27	Rigid Bow Spring every joint to KOP	pumping cement.	due to hole conditions
			-	Hamilton		6760		TOC >= 200'	Joint to NOP		
			-	Marcellus		6875		above 9.625" shoe			
		8,75" - 8,5" Lateral		TD	14938	6913	12.0ppg- 12.5ppg SOBM				
×	X	J 1		Onondaga		6923	- AMERICA				
S S S S S S S S S S S S S S S S S S S		3' TVD / 7365' MD	EXERTED	8.75 / 8.	5 Hole - C	emented Lo	ng String			73' ft Lateral	TD @ +/-6913' TVD +/-14938' MD

RECEIVED
Office of Oil and Gas

SEP 252013

WV Department of Environmental 2/13/2013

	Page	of	
API Number 47 - 5	<u>1</u> -	NI 687	_
Operator's Well			

# STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION OFFICE OF OIL AND GAS

### FLUIDS/ CUTTINGS DISPOSAL & RECLAMATION PLAN

Operator Name Noble Energy, Inc. OP Code 494501907	
Watershed (HUC 10) Dunkard Fork (HUC 10) Quadrangle Majorsville	
Elevation 1314' County Marshall District Webster	
Do you anticipate using more than 5,000 bbls of water to complete the proposed well work? Yes X No Will a pit be used for drill cuttings? Yes No X If so, please describe anticipated pit waste: Closed Loop-No pit to be utilized  Will a synthetic liner be used in the pit? Yes No If so, what ml.?  Proposed Disposal Method For Treated Pit Wastes:  Land Application Underground Injection (UIC Permit Number December 1) Reuse (at API Number TBD-Next anticipated well Off Site Disposal (Supply form WW-9 for disposal location) Other (Explain	
Will closed loop system be used? Yes	
Drilling medium anticipated for this well? Air, freshwater, oil based, etc. Air thru intermediate string, then SOBM  -If oil based, what type? Synthetic, petroleum, etc. Synthetic  Additives to be used in drilling medium? Please see attached list  Drill cuttings disposal method? Leave in pit, landfill, removed offsite, etc.  -If left in pit and plan to solidify what medium will be used? (cement, lime, sawdust)  -Landfill or offsite name/permit number? Please see attached list	
I certify that I understand and agree to the terms and conditions of the GENERAL WATER POLLUTION PERMIT issued on August 1, 2005, by the Office of Oil and Gas of the West Virginia Department of Environmental Protection. I understand that the provisions of the permit are enforceable by law. Violations of any term or condition of the general permit and/or other applicable law or regulation can lead to enforcement action.  I certify under penalty of law that I have personally examined and am familiar with the information submitted on this application form and all attachments thereto and that, based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine or imprisonment.  Company Official Signature  OFFICIAL SEAL  Notary Public State Office of Oil and Gas  Company Official Title Regulatory Technician  Office of Oil and Gas  Subscribed and sworn before me this 30th day of Wy Commission Express Postarios Regulatory 25 2013	
My commission expires Wroter 23, 2015  My commission expires Protection 13/201	3

### Site Water/Cuttings Disposal

### **Cuttings**

### **Haul off Company:**

Eap Industries, Inc. DOT # 0876278 1575 Smith Twp State Rd. Atlasburg PA 15004 1-888-294-5227

### **Disposal Locations:**

Apex Environmental, LLC Permit # 06-08438 11 County Road 78 Amsterdam, OH 43903 740-543-4389

Westmoreland Waste, LLC Permit # 100277 111 Conner Lane Belle Vernon, PA 15012 724-929-7694

Sycamore Landfill (Allied Waste) R30-07900105-2010 4301 Sycamore Ridge Road Hurricane, WV 25526 304-562-2611

### <u>Water</u>

### **Haul off Company:**

Dynamic Structures, Clear Creek DOT # 720485 3790 State Route 7 New Waterford, OH 44445 330-892-0164

### **Disposal Location:**

Solidification
Waste Management, Arden Landfill Permit # 100172
200 Rangos Lane
Washington, PA 15301
724-225-1589

Solidification/Incineration
Soil Remediation, Inc. Permit # 02-20753
6065 Arrel-Smith Road
Lowelville, OH 44436

RECEIVED
Office of Oil and Gas

SEP 25 2013

WV Department 05/2013 Environmental Protection

Noble Energy, Inc.		
have ar atrave at 2		
Se	eed Mixtures	
Seed Type Area I Ibs/acre Tall Fescue 40	Seed Type Tall Fescue	a II Ibs/acre 40
Ladino Clover 5	Ladino Clover	5
Alternative Seed Mixtures shown on Site Plan		
Plan Approved by:		
Title: Manacy Manacy Field Reviewed? Yes	Date: 9/19/13	PRECEIVED

## west virginia department of environmental protection



### Water Management Plan: Primary Water Sources



WMP-01586

API/ID Numbers

047-051-01687

Operator:

Noble Energy, Inc

WEB22AHS

#### Important:

For each proposed primary water source (including source intakes for purchased water sources) identified in your water management plan, and summarized herein, DEP has made an evaluation concerning water availability over the specified date range. DEP's assessment is based on the following considerations:

- •Statistical analysis of historical USGS stream gauge data (transferred to un-gauged locations as necessary);
- •Identification of sensitive aquatic life (endangered species, mussels, etc.);
- Quantification of known existing demands on the water supply (Large Quantity Users);
- · Minimum flows required by the Army Corps of Engineers; and
- · Designated stream uses.

Based on these factors, DEP has provided, for each intake location (and origination point for purchased water), a reference gauge location and discharge flow reading which must be surpassed prior to withdrawals. Additionally, DEP has established a minimum passby flow at the withdrawal location which must also be surpassed prior to withdrawals. These thresholds are considered terms of the permit and are enforceable as such.

DEP is aware that some intake points will be used for mutiple wells and well sites. In these cases, the thresholds set by the Water Management Plan are to be interepreted as total withdrawal limits for each location over the specified date range regardless of how many wells are supported by that intake.

For all purchased water intakes, determinations of water availability are made at the original source intake location. It is the responsibility of the Oil and Gas Operator, not the seller, to cease withdrawal of water from the seller when flows are less than the minimum gauge reading at the stream gauge referenced by the Water Management Plan in order to protect stream uses.

Note that the determinations made herein are based on the best available data, but it is impossible to predict water availability in the future. While the DEP has carefully established these minimum withdrawal thresholds, it remains the operator's responsibility to protect aquatic life at all times. Approval to withdrawal is contingent upon permission from the land owner. It is the responsibility of the operator to secure and maintain permission prior to any withdrawals.

The operator is reminded that 24-48 hours prior to withdrawing (or purchasing) water, DEP must be notified by email at DEP.water.use@wv.gov.

APPROVED NOV 2 0 2013

### Source Summary

WMP-01586

API Number:

047-051-01687

Operator:

Noble Energy, Inc

WEB22AHS

Stream/River

Wheeling Creek Pump Station 1 @ CNX Land Resources Source

Marshall

Owner:

**Consol Energy** 

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

10/14/2013

10/14/2014

11,000,000

39.95205

-80.56189

Regulated Stream?

Ref. Gauge ID:

3111955

Wheeling Creek near Majorsville, WV

Max. Pump rate (gpm):

1,000

Min. Gauge Reading (cfs):

18.23

Min. Passby (cfs)

16.63

**DEP Comments:** 

Wheeling Creek Pump Station 2 @ CNX Land Resources Source

Marshall

Owner:

CNX Land Resources, Inc.

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude: 39.949578

-80.531256

10/14/2013

10/14/2014

11,000,000

3111955

Wheeling Creek near Majorsville, WV

Max. Pump rate (gpm):

Regulated Stream?

1,000

Min. Gauge Reading (cfs):

Ref. Gauge ID:

18.23

Min. Passby (cfs)

16.24

**DEP Comments:** 

#### Source Summary

WMP-01586

API Number:

047-051-01687

Noble Energy, Inc

WFB22AHS

### **Purchased Water**

West Virginia American Water - Weston Water Treatme Source

✓ Regulated Stream? Stonewall Jackson Dam Ref. Gauge ID:

Lewis Owner: West Virginia American

Water

Start Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

10/14/2013

End Date

10/14/2014

11,000,000

500,000

3061000

WEST FORK RIVER AT ENTERPRISE, WV

Max. Pump rate (gpm):

Min. Gauge Reading (cfs):

170.57

Min. Passby (cfs)

**DEP Comments:** 

Bethlehem Water Department Source

Ohio

Owner:

Bethlehem Water

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

Department

10/14/2013

10/14/2014

11,000,000

200,000

Ohio River Station: Willow Island Lock & Dam

✓ Regulated Stream?

Max. Pump rate (gpm):

Ohio River Min. Flow Ref. Gauge ID:

9999999

Min. Gauge Reading (cfs):

6,468.00

Min. Passby (cfs)

**DEP Comments:** 

Bethlehem Water Department purchases all its water from the City of Wheeling. Thresholds are set based on the location of the City of Wheeling's raw water intake.

Wellsburg Water Department

Brooke

Owner:

Wellsburg Water Department

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

10/14/2013

10/14/2014

11,000,000

Ohio River Min. Flow Ref. Gauge ID:

200,000

9999999

Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm):

✓ Regulated Stream?

Min. Gauge Reading (cfs):

6,468.00

Min. Passby (cfs)

**DEP Comments:** 

This alluvial groundwater well is, to some extent, under the influence of the Ohio River.

Please adhere to stated minimum flow requirements on the Ohio River for

withdrawals. http://www.erh.noaa.gov/er/ohrfc/flows.shtml

Source	Moundsville Water Bo	oard	Marsha	ı <b>l</b> l Owner:	Moundsville Water Treatment Plant
Start Date 10/14/2013	End Date <b>10/14/2014</b>	Total Volume (gal) <b>11,000,000</b>	Max. daily purchase ( <sub>1</sub> <b>2,000,000</b>	gal) Intake La	atitude: Intake Longitude: 
✓ Regulated	Stream? Ohio Rive	r <b>Min. Flow</b> Ref. Gauge I	D: <b>9999999</b>	Ohio River Station: W	illow Island Lock & Dam
Max. Pump r	rate (gpm):	Min. Gauge Read	ling (cfs): 6,468.	<b>00</b> Min. Pa	ssby (cfs)
	DEP Comments:	This alluvial groundwate Please adhere to stated withdrawals. http://www.	d minimum flow requ	irements on the Ohio	
<ul><li>Source</li></ul>	Dean's Water Service		Ohio	Owner:	Dean's Water Service
Start Date <b>10/14/2013</b>	End Date <b>10/14/2014</b>	Total Volume (gal) <b>11,000,000</b>	Max. daily purchase (§ <b>600,000</b>	gal) Intake La	atitude: Intake Longitude: 
			0000000		
✓ Regulated	Stream? Ohio Rive	<b>r Min. Flow</b> Ref. Gauge I	D: <b>9999999</b>	Onio River Station: W	illow Island Lock & Dam
Max. Pump r		r Min. Flow Ref. Gauge I  Min. Gauge Reac			ssby (cfs)

Ohio

6,468.00

Refer to the specified sation on the National Weather Service's Ohio River forecasts at

Max. daily purchase (gal)

17,500

9999999

the following website: http://www.erh.noaa.gov/ohrfc//flows.shtml

Owner:

**Wheeling Water** 

Intake Latitude: Intake Longitude:

Ohio River Station: Willow Island Lock & Dam

Min. Passby (cfs)

Department

**Wheeling Water Department** 

Ohio River Min. Flow

Total Volume (gal)

Ref. Gauge ID:

Min. Gauge Reading (cfs):

11,000,000

**End Date** 

10/14/2014

**DEP Comments:** 

Source

Start Date

10/14/2013

✓ Regulated Stream?

Max. Pump rate (gpm):

**Ohio county PSD** Ohio **Ohio County PSD** Owner: Source

Max. daily purchase (gal) Intake Latitude: Intake Longitude: Total Volume (gal) **End Date** Start Date

11,000,000 720,000 10/14/2013 10/14/2014

**✓** Regulated Stream? Ohio River Station: Willow Island Lock & Dam Ohio River Min. Flow Ref. Gauge ID: 9999999

Max. Pump rate (gpm):

Min. Gauge Reading (cfs):

**DEP Comments:** Refer to the specified station on the National Weather Service's Ohio River forecast

6,468.00

Min. Passby (cfs)

website: http://www.erh.noaa.gov/ohrfc//flows.shtml

#### Source Summary

WMP-01586 API Number: 047-051-01687 Operator: Noble Energy, Inc.
WEB22AHS

### **Ground Water**

Source Shoemaker Groundwater Well #3 Marshall Owner: Consol Energy

Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude:

10/14/2013 10/14/2014 11,000,000 40.0222 -80.73389

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 99999999 Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm): 800 Min. Gauge Reading (cfs): 6,468.00 Min. Passby (cfs)

DEP Comments: This alluvial groundwater well is, to some extent, under the influence of the Ohio River.

Please adhere to stated minimum flow requirements on the Ohio River for

withdrawals. http://www.erh.noaa.gov/er/ohrfc/flows.shtml

Source Shoemaker Groundwater Well #4 Marshall Owner: Consol Energy

Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude:

10/14/2013 10/14/2014 11,000,000 40.022293 -80.733586

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm): 800 Min. Gauge Reading (cfs): 6,468.00 Min. Passby (cfs)

DEP Comments: This alluvial groundwater well is, to some extent, under the influence of the Ohio River.

Please adhere to stated minimum flow requirements on the Ohio River for

withdrawals. http://www.erh.noaa.gov/er/ohrfc/flows.shtml

Source Shoemaker Groundwater Well #5 Marshall Owner: Consol Energy

Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude:

10/14/2013 10/14/2014 11,000,000 40.021256 -80.734568

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm): 800 Min. Gauge Reading (cfs): 6,468.00 Min. Passby (cfs)

DEP Comments: This alluvial groundwater well is, to some extent, under the influence of the Ohio River.

Please adhere to stated minimum flow requirements on the Ohio River for

withdrawals. http://www.erh.noaa.gov/er/ohrfc/flows.shtml

Source Shoemaker Groundwater Well #6 Marshall Owner: Consol Energy

 Start Date
 End Date
 Total Volume (gal)
 Max. daily purchase (gal)
 Intake Latitude: Intake Longitude:

 10/14/2013
 10/14/2014
 11,000,000
 40.02076
 -80.73397

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm): 800 Min. Gauge Reading (cfs): 6,468.00 Min. Passby (cfs)

DEP Comments: This alluvial groundwater well is, to some extent, under the influence of the Ohio River.


Please adhere to stated minimum flow requirements on the Ohio River for

withdrawals. http://www.erh.noaa.gov/er/ohrfc/flows.shtml

WMP-0	)1586	API/ID Number:	047-051-01687 B22AHS	Operator:	Noble Er	nergy, Inc
ource ID: 30022 Sou	arce realine	emaker Groundwater V	Vell #3	Source Latitu	de: 40.0	0222
	Con	sol Energy		Source Longitud	de: -80.	.73389
HUC-8 Code:	5030106		A	inticipated withdrawal start	date:	10/14/2013
Drainage Area (	(sq. mi.): 250	000 County:	Marshall	Anticipated withdrawal end	date:	10/14/2014
☐ Endangered Species ☐ Trout Stream?	? Mussel	Stream?		Total Volume from Source		11,000,000
✓ Regulated Stream?	Ohio River	Min. Flow		Max. Pump rate (g	pm):	800
Proximate PSD?				Max. Sir	nultaneou	s Trucks:
✓ Gauged Stream?				Max. Truc	k pump ra	te (gpm)
Reference Gaug	9999999	Ohio River Station:	Willow Island Lock 8	& Dam		
Drainage Area (sq	ı. mi.) 25,	000.00		Gauge Threshold	(cfs):	6468

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	45,700.00	+	÷.
2	49,200.00	4	2
3	65,700.00		
4	56,100.00		120
5	38,700.00	-	-
6	24,300.00	-	
7	16,000.00	-	1/2-1
8	13,400.00		(2)
9	12,800.00		
10	15,500.00	3	4
11	26,300.00		
12	41,300.00	4	



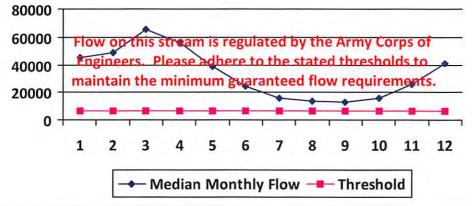


### Water Availability Assessment of Location


Base Threshold (cfs):	-
Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	1.78
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	
Passby at Location (cfs):	_

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

WMP-01586	API/ID Number:	047-051-01687	Operator: Nobl	e Energy, Inc
	WE	B22AHS		
Source ID: 30023 Source Name	Shoemaker Groundwater V	Vell #4	Source Latitude:	40.022293
	Consol Energy		Source Longitude:	-80.733586
	25000 County: Name of the American Stream?	Marshall	nticipated withdrawal start date Inticipated withdrawal end date Total Volume from Source (gal)	: 10/14/2014
	r 3? River Min. Flow		Max. Pump rate (gpm)	
✓ Gauged Stream?			Max. Truck pun	np rate (gpm)
Reference Gaug 99999	99 Ohio River Station: \	Willow Island Lock &	Dam	
Drainage Area (sq. mi.)	25,000.00		Gauge Threshold (cfs	6468

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	45,700.00		
2	49,200.00	*	*
3	65,700.00		
4	56,100.00	-	1.00
5	38,700.00		-
6	24,300.00		-
7	16,000.00	-	2
8	13,400.00		
9	12,800.00		
10	15,500.00	2	-
11	26,300.00		-
12	41,300.00		-



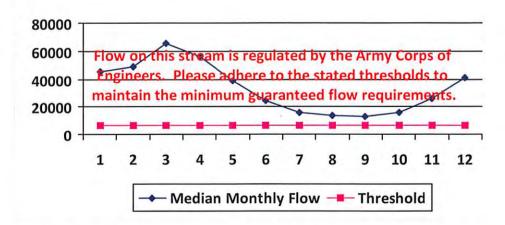


Water Availability	Assessment of	Location

Base Threshold (cfs):	-
Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	1.78
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	-
Passby at Location (cfs):	- 4

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

	WMP-0	01586	API/ID Number	047-051-01687 WEB22AHS	Operator: Noble E	nergy, Inc
Source II	D: 30024 Sou		naker Groundwate	er Well #5	Source Latitude: 40	
		Conso	l Energy		Source Longitude: -80	0.734568
	HUC-8 Code: Drainage Area (			Marshall	Anticipated withdrawal start date: Anticipated withdrawal end date:	10/14/2013 10/14/2014
	dangered Species? out Stream?	? ☐ Mussel Sti	ream?		Total Volume from Source (gal):	11,000,000
	gulated Stream?	Ohio River IV	lin. Flow		Max. Pump rate (gpm):	800
	oximate PSD?				Max. Simultaneo	us Trucks:
					Mario Torrela succession	ata (anas)
<b>▼</b> Ga	Reference Gaug  Drainage Area (sq		00.00	n: Willow Island Lock	& Dam  Gauge Threshold (cfs):	6468
	Reference Gaug Drainage Area (sq  Median monthly flow		Estimated Available	on: Willow Island Lock	& Dam	
Vlonth	Reference Gaug  Drainage Area (sq  Median  monthly flow  (cfs)	7. mi.) 25,00	00.00 Estimated	on: Willow Island Lock	& Dam	
Month 1	Reference Gaug Drainage Area (sq  Median monthly flow (cfs) 45,700.00	7. mi.) 25,00	Estimated Available	on: Willow Island Lock	& Dam	
Month  1 2	Reference Gaug Drainage Area (sq  Median monthly flow (cfs) 45,700.00 49,200.00	7. mi.) 25,00	Estimated Available	on: Willow Island Lock	& Dam	
Month	Reference Gaug Drainage Area (sq  Median monthly flow (cfs) 45,700.00 49,200.00 65,700.00	7. mi.) 25,00	Estimated Available	on: Willow Island Lock	& Dam	
Month  1 2	Reference Gaug Drainage Area (sq  Median monthly flow (cfs) 45,700.00 49,200.00 65,700.00 56,100.00	7. mi.) 25,00	Estimated Available	on: Willow Island Lock	& Dam	
Month  1 2 3 4	Reference Gaug Drainage Area (sq  Median monthly flow (cfs) 45,700.00 49,200.00 65,700.00	7. mi.) 25,00	Estimated Available	on: Willow Island Lock	& Dam	
//onth  1 2 3 4 5	Reference Gaug  Drainage Area (sq.  Median monthly flow (cfs) 45,700.00 49,200.00 65,700.00 56,100.00 38,700.00	7. mi.) 25,00	Estimated Available	on: Willow Island Lock	& Dam	
1 2 3 4 5 6	Reference Gaug  Drainage Area (sq.  Median monthly flow (cfs) 45,700.00 49,200.00 65,700.00 56,100.00 38,700.00 24,300.00	7. mi.) 25,00	Estimated Available	on: Willow Island Lock	& Dam	
Month  1 2 3 4 5 6 7	Reference Gaug  Drainage Area (sq.  Median monthly flow (cfs)  45,700.00  49,200.00  65,700.00  56,100.00  38,700.00  24,300.00  16,000.00	7. mi.) 25,00	Estimated Available	on: Willow Island Lock	& Dam	
1 2 3 4 5 6 7 8	Reference Gaug  Drainage Area (sq.  Median monthly flow (cfs)  45,700.00  49,200.00  65,700.00  56,100.00  38,700.00  24,300.00  16,000.00  13,400.00	7. mi.) 25,00	Estimated Available	on: Willow Island Lock	& Dam	
Month  1 2 3 4 5 6 7 8 9	Reference Gaug  Drainage Area (sq.  Median monthly flow (cfs)  45,700.00  49,200.00  65,700.00  56,100.00  38,700.00  24,300.00  16,000.00  13,400.00  12,800.00	7. mi.) 25,00	Estimated Available	on: Willow Island Lock	& Dam	

### **Water Availability Profile**

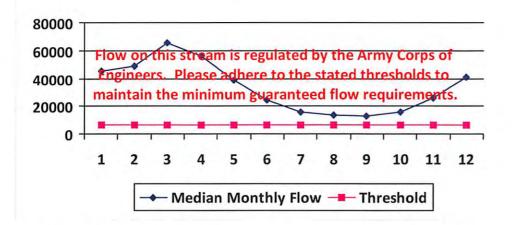


### Water Availability Assessment of Location

Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	1.78
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

	WMP-0	1586	API/ID Number	047-051-0 WEB22AHS	O1687 Operator: Noble E	nergy, Inc
Source II	D: 30025 Sou	rce Name Shoem	aker Groundwate	er Well #6	Source Latitude: 40	.02076
		Consol	Energy		Source Longitude: -80	0.73397
	HUC-8 Code: Drainage Area ( dangered Species? out Stream?		2,300,000	Marshall	Anticipated withdrawal start date: Anticipated withdrawal end date: Total Volume from Source (gal):	10/14/2013 10/14/2014 11,000,000
	gulated Stream?	Ohio River Mi	n. Flow		Max. Pump rate (gpm):	800
	oximate PSD?	Omo taver ivi			Max. Simultaneo	us Trucks:
	uged Stream?				Max. Truck pump r	rate (gpm)
	Reference Gaug	999999		on: Willow Island		
Month	Drainage Area (sq <u>Median</u> <u>monthly flow</u>		Estimated Available	on: Willow Island	I Lock & Dam  Gauge Threshold (cfs):	6468
Month	Drainage Area (sq	1. mi.) 25,000 Threshold	0.00 Estimated	on: Willow Island		6468
	Drainage Area (sq Median monthly flow (cfs)	1. mi.) 25,000 Threshold	Estimated Available	on: Willow Island		6468
1	Median monthly flow (cfs) 45,700.00	1. mi.) 25,000 Threshold	Estimated Available	on: Willow Island		6468
1 2	Median monthly flow (cfs) 45,700.00 49,200.00	1. mi.) 25,000 Threshold	Estimated Available	on: Willow Island		6468
1 2 3	Median monthly flow (cfs) 45,700.00 49,200.00 65,700.00	1. mi.) 25,000 Threshold	Estimated Available	on: Willow Island		6468
1 2 3 4	Median monthly flow (cfs) 45,700.00 49,200.00 65,700.00 56,100.00	1. mi.) 25,000 Threshold	Estimated Available	on: Willow Island		6468
1 2 3 4 5	Median monthly flow (cfs) 45,700.00 49,200.00 65,700.00 56,100.00 38,700.00	1. mi.) 25,000 Threshold	Estimated Available	on: Willow Island		6468
2 3 4 5 6	Median monthly flow (cfs) 45,700.00 49,200.00 65,700.00 56,100.00 38,700.00 24,300.00	1. mi.) 25,000 Threshold	Estimated Available	on: Willow Island		6468
1 2 3 4 5 6	Median monthly flow (cfs) 45,700.00 49,200.00 65,700.00 56,100.00 38,700.00 24,300.00 16,000.00	1. mi.) 25,000 Threshold	Estimated Available	on: Willow Island		6468

### **Water Availability Profile**

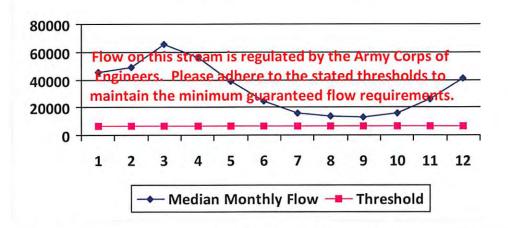

#### Water Availability Assessment of Location

Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	1.78
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	
Passby at Location (cfs):	

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

11


12

26,300.00 41,300.00

WMP-01586	API/ID Number: 04 WEB22AF		e Energy, Inc
	est Virginia American Water - V est Virginia American Water	Weston Water Treat Source Latitude: Source Longitude:	
☐ Endangered Species? ☑ Musso ☐ Trout Stream? ☐ Tier 3	04.83 County: Lewis el Stream? ? Il Jackson Dam	Anticipated withdrawal start date: Anticipated withdrawal end date: Total Volume from Source (gal): Max. Pump rate (gpm): Max. Simultan Max. Truck pum	10/14/2014 11,000,000 eous Trucks:
Reference Gaug 3061000  Drainage Area (sq. mi.)  Median Threshold	WEST FORK RIVER AT EN 759.00 Estimated	TERPRISE, WV  Gauge Threshold (cfs	: 234

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	321.23	+	-
2	361.67	-	-
3	465.85	*	7-
4	266.43	20	L.
5	273.47	÷ 1	
6	137.03	12.0	-2
7	88.78	9	1,0
8	84.77		16
9	58.98		
10	57.83		-
11	145.12		- 4
12	247.76		



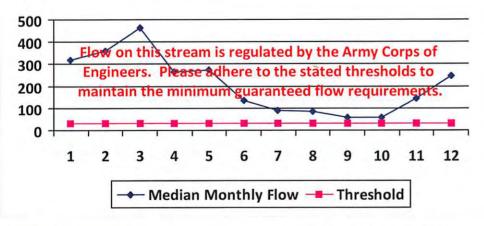

### Water Availability Assessment of Location

Upstream Demand (cfs):	24.32
Downstream Demand (cfs):	0.00
Pump rate (cfs):	
Headwater Safety (cfs):	8.08
Ungauged Stream Safety (cfs):	0.00

Passby at Location (cfs):

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

API/ID Number: 047-051-01687 Noble Energy, Inc WMP-01586 Operator: WEB22AHS 30027 Bethlehem Water Department Source ID: Source Name Source Latitude: -Bethlehem Water Department Source Longitude: -5030106 HUC-8 Code: Anticipated withdrawal start date: 10/14/2013 Ohio 25000 Drainage Area (sq. mi.): County: 10/14/2014 Anticipated withdrawal end date: **Endangered Species?** ✓ Mussel Stream? Total Volume from Source (gal): 11,000,000 Trout Stream? ☐ Tier 3? Max. Pump rate (gpm): Ohio River Min. Flow Regulated Stream? Max. Simultaneous Trucks: City of Wheeling Proximate PSD? Max. Truck pump rate (gpm) Gauged Stream? 9999999 Ohio River Station: Willow Island Lock & Dam Reference Gaug Drainage Area (sq. mi.) 25,000.00 Gauge Threshold (cfs): 6468 Estimated Median Threshold monthly flow Available (+ pump Month water (cfs) (cfs) 45,700.00 2 49,200.00 3 65,700.00 4 56,100.00 5 38,700.00 6 24,300.00 7 16,000.00 8 13,400.00 9 12,800.00 10 15,500.00 11 26,300.00 12 41,300.00 Water Availability Assessment of Location Water Availability Profile Base Threshold (cfs): 80000 Upstream Demand (cfs): Downstream Demand (cfs): 60000 eam is regulated by the Army Corps of Pump rate (cfs): here to the stated thresholds to 40000 maintain the minimum guaranteed flow requirements. Headwater Safety (cfs): 0.00 20000 Ungauged Stream Safety (cfs): 0.00 1 5 9 2 3 6 7 11 12


"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

Median Monthly Flow — Threshold

10

Min. Gauge Reading (cfs): Passby at Location (cfs):


Source Detail API/ID Number: WMP-01586 047-051-01687 Operator: Noble Energy, Inc WEB22AHS Wellsburg Water Department 30028 Source Name Source Latitude: -Source ID: Wellsburg Water Department Source Longitude: -5030106 HUC-8 Code: 10/14/2013 Anticipated withdrawal start date: 25000 Brooke Drainage Area (sq. mi.): County: Anticipated withdrawal end date: 10/14/2014 **Endangered Species?** ✓ Mussel Stream? Total Volume from Source (gal): 11,000,000 Trout Stream? Tier 3? Max. Pump rate (gpm): Ohio River Min. Flow Regulated Stream? Max. Simultaneous Trucks: Proximate PSD? Wellsburg Water Department Max. Truck pump rate (gpm) Gauged Stream? Reference Gaug 9999999 Ohio River Station: Willow Island Lock & Dam 25,000.00 6468 Drainage Area (sq. mi.) Gauge Threshold (cfs): Median Estimated Threshold monthly flow Available (+ pump Month (cfs) water (cfs) 45,700.00 1 2 49,200.00 3 65,700.00 4 56,100.00 5 38,700.00 6 24,300.00 7 16,000.00 8 13,400.00 9 12,800.00 10 15,500.00 26,300.00 11 12 41,300.00

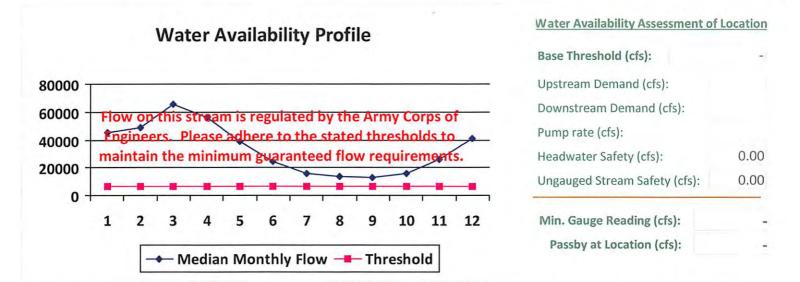

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.




### **Water Availability Profile**

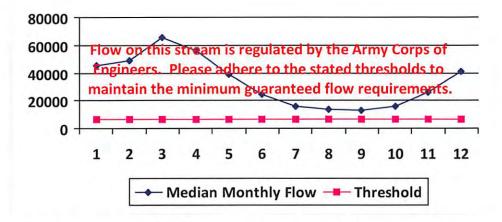

### Water Availability Assessment of Location

Base Threshold (cfs): Upstream Demand (cfs): Downstream Demand (cfs): Pump rate (cfs): 0.00 Headwater Safety (cfs): Ungauged Stream Safety (cfs): 0.00 Min. Gauge Reading (cfs): Passby at Location (cfs):

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

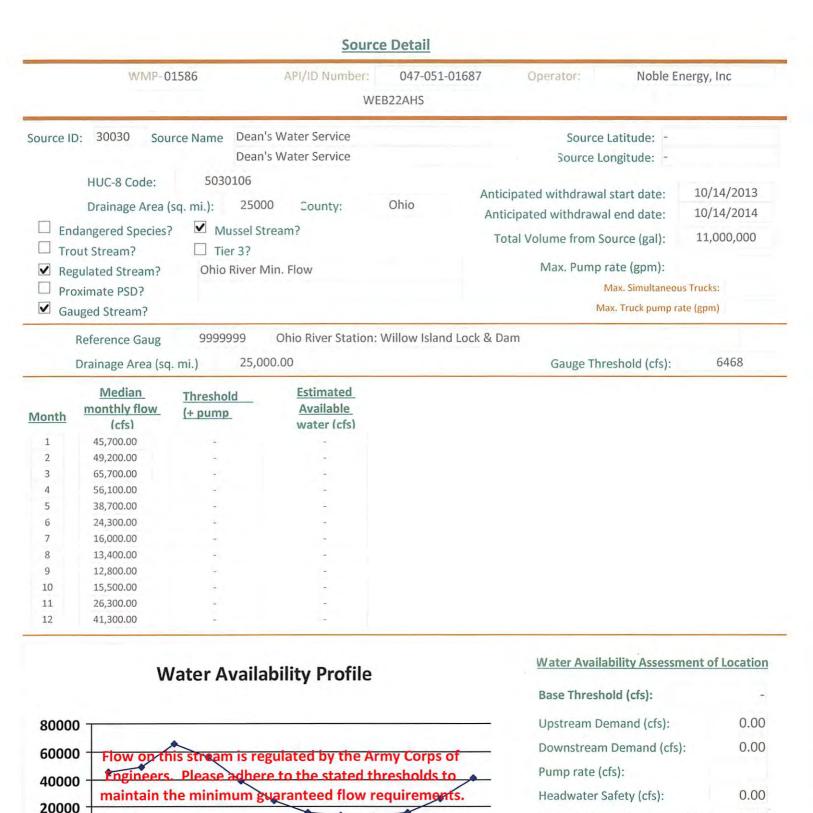

### "Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

10

11

12

0.00

1

2

3

4

5

6

7


Median Monthly Flow — Threshold

8

9

Ungauged Stream Safety (cfs):

Min. Gauge Reading (cfs): Passby at Location (cfs):

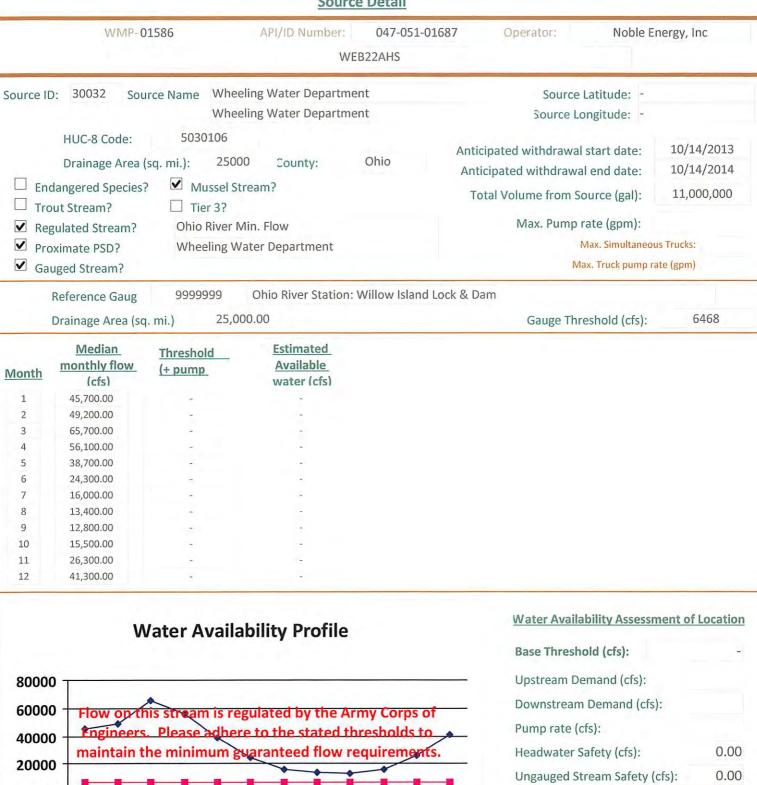

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

10

11

12

Min. Gauge Reading (cfs):

Passby at Location (cfs):

1

2

3

5

4

6

8


7

Median Monthly Flow — Threshold

9



### Water Availability Profile

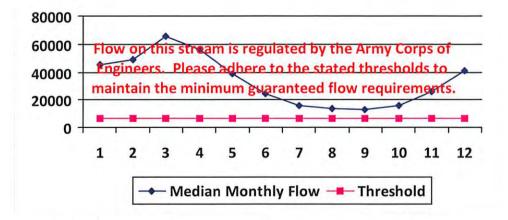

Base Threshold (cfs): Upstream Demand (cfs): Downstream Demand (cfs): Pump rate (cfs): Headwater Safety (cfs): 0.00 Ungauged Stream Safety (cfs): 0.00 Min. Gauge Reading (cfs):


Passby at Location (cfs):

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

WMP-01586	API/ID Number:	047-051-01687	Operator: Nobl	e Energy, Inc
	WEI	B22AHS		
Source ID: 30020 Source Name	Wheeling Creek Pump Stati	on 1 @ CNX Land Reso	ur Source Latitude:	39.95205
	Consol Energy		Source Longitude:	-80.56189
Drainage Area (sq. mi.):  ☐ Endangered Species? ✓ M	0106 156.06 County: N lussel Stream? er 3?	Marshall Anti	cipated withdrawal start date cipated withdrawal end date tal Volume from Source (gal) Max. Pump rate (gpm) Max. Simultan	: 10/14/2014 : 11,000,000 : 1,000
✓ Gauged Stream?			Max. Truck pun	np rate (gpm)
Reference Gaug 3111	.955 Wheeling Creek nea	r Majorsville, WV		
Drainage Area (sq. mi.)	152.00		Gauge Threshold (cfs	s): 16

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)	
1	0.00	18.66		
2	0.00	18.66		
3	0.00	18.66	9.	
4	0.00	18.66	-2	
5	0.00	18.66		
6	0.00	18.66	1.0	
7	0.00	18.66	10.0	
8	0.00	18.66		
9	0.00	18.66	C-	
10	0.00	18.66	12	
11	0.00	18.66	+	
12	0.00	18.66	-	

### **Water Availability Profile**

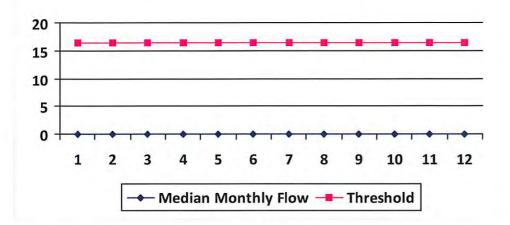

#### Water Availability Assessment of Location


ongauged Strediti Salety (Cis).	0.00
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	0.00
Pump rate (cfs):	2.23
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	16.43

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

1	WMP-01586	API/ID Number:	047-051-01687	Operator:	Noble Er	ergy, Inc
		W	EB22AHS			
Source ID: 30021	Source Name	Wheeling Creek Pump Sta	ntion 2 @ CNX Land F			949578
HUC-8 C Drainage Endangered S Trout Stream Regulated Str	e Area (sq. mi.): species?		Marshall	Source Long Anticipated withdrawal st Anticipated withdrawal e Total Volume from Sou Max. Pump rat	art date: end date: rce (gal):	10/14/2013 10/14/2014 10/14/2014 11,000,000 1,000
☐ Proximate PSI ☐ Gauged Strea					x. Simultaneous Truck pump ra	
Reference Drainage A	Gaug 31119	955 Wheeling Creek no	ear Majorsville, WV	Gauge Thres	hold (cfs):	16

onth	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)	
1	0.00	18.27		
2	0.00	18.27	-	
3	0.00	18.27		
4	0.00	18.27		
5	0.00	18.27	0.04	
6	0.00	18.27	4	
7	0.00	18.27	1,0,1	
8	0.00	18.27	÷ .	
9	0.00	18.27	1.0	
10	0.00	18.27	- A	
11	0.00	18.27	4	
12	0.00	18.27	-	

### **Water Availability Profile**

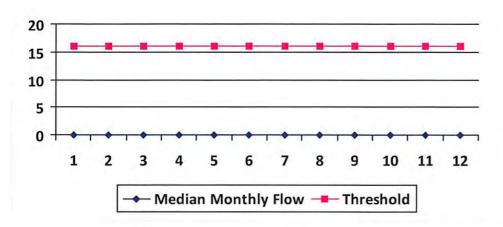

### Water Availability Assessment of Location

Min. Gauge Reading (cfs):  Passby at Location (cfs):	18.23 16.04
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	0.00
Pump rate (cfs):	2.23
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	16.04

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

### west virginia department of environmental protection



### Water Management Plan: Secondary Water Sources



WMP-01586

API/ID Number

047-051-01687

Operator:

Noble Energy, Inc.

WEB22AHS

#### Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

### Multi-site impoundment

Source ID: 30034 Source Name SHL #1 Centralized Freshwater Impoundment

Source start date:

10/14/2013

Source end date:

10/14/2014

Source Lat:

39.979696

Source Long:

-80.579465

County

Marshall

Max. Daily Purchase (gal)

Total Volume from Source (gal):

11,000,000

**DEP Comments:** 

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-200

WMP- <b>01586</b>	API/ID Number	047-051-01687	Operator:	Noble Energy, Inc
	,		- (	

#### WEB22AHS

#### Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 30035 Source Name SHL #2 Centralized Waste Pit 10/14/2013 Source start date:

10/14/2014 Source end date:

Reference: WMP-201

Marshall

39.966973 -80.561377 Marshall Source Long: Source Lat: County

Total Volume from Source (gal): 11,000,000 Max. Daily Purchase (gal)

**DEP Comments:** WV51-WPC-00001

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

39.974133

Source ID: 30036 Source Name SHL #3 Centralized Waste Pit 10/14/2013 Source start date:

> Source end date: 10/14/2014 -80.55527

County Source Long:

11,000,000 Max. Daily Purchase (gal) Total Volume from Source (gal):

**DEP Comments:** WV51-WPC-00002

Source Lat:

The intake identified above has been defined in a previous water management plan. The Reference: WMP-202 thresholds established in that plan govern this water management plan unless otherwise

noted.

WMP-01586 API/ID Number 047-051-01687 Operator: Noble Energy, Inc

WEB22AHS

#### Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 30037 Source Name SHL #4 Centralized Waste Pit Source start date: 10/14/2013

Source end date: 10/14/2014

Source Lat: 39.963284 Source Long: -80.562743 County Marshall

Max. Daily Purchase (gal) Total Volume from Source (gal): 11,000,000

DEP Comments: WV51-WPC-00003

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-204

### **Purchased Water**

Source ID: 30031 Source Name Bridgeport Ohio Water Department Source start date: 10/14/2013

Public Water Provider Source end date: 10/14/2014

Source Lat: 40.08348 Source Long: -80.736488 County

Max. Daily Purchase (gal) 200,000 Total Volume from Source (gal): 11,000,000

DEP Comments: Please ensure that purchases from this source are approved by, and completed in

accordance with, requirements set forth by the State of Ohio Department of

accordance with, requirements set forth by the state of onlo bepartment of

Environmental Protection.

WMP- 01586 API/ID Number 047-051-01687 Operator: Noble Energy, Inc

WEB22AHS

#### Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

### **Recycled Frac Water**

Source ID: 30038 Source Name Various Source start date: 10/14/2013

Source end date: 10/14/2014

Source Lat: Source Long: County

Max. Daily Purchase (gal) Total Volume from Source (gal): 11,000,000

DEP Comments: Sources include, but are not limited to, the SHL17, SHL23, and WEB13 well pads.

