

west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax Earl Ray Tomblin, Governor Randy C. Huffman, Cabinet Secretary www.dep.wv.gov

May 21, 2014

WELL WORK PERMIT

Horizontal 6A Well

This permit, API Well Number: 47-5101745, issued to NOBLE ENERGY, INC., is evidence of permission granted to perform the specified well work at the location described on the attached pages and located on the attached plat, subject to the provisions of Chapter 22 of the West Virginia Code of 1931, as amended, and all rules and regulations promulgated thereunder, and to all conditions and provisions outlined in the pages attached hereto. Notification shall be given by the operator to the Oil and Gas Inspector at least 24 hours prior to the construction of roads, locations, and/or pits for any permitted work. In addition, the well operator shall notify the same inspector 24 hours before any actual well work is commenced and prior to running and cementing casing. Spills or emergency discharges must be promptly reported by the operator to 1-800-642-3074 and to the Oil and Gas inspector.

Please be advised that form WR-35, Well Operators Report of Well Work is to be submitted to this office within 90 days completion of permitted well work, as should form WR-34 Discharge Monitoring Report within 30 days of discharge of pits, if applicable. Failure to abide by all statutory and regulatory provisions governing all duties and operations hereunder may result in suspension or revocation of this permit and, in addition, may result in civil and/or criminal penalties being imposed upon the operators.

In addition to the applicable requirements of this permit, and the statutes and rules governing oil and gas activity in WV, this permit may contain specific conditions which must be followed. Permit conditions are attached to this cover letter.

Per 35CSR-4-5.2.g this permit will expire in two (2) years from the issue date unless permitted well work is commenced. If there are any questions, please feel free to contact me at (304) 926-0499 ext. 1654.

James Martin

Chief

Operator's Well No: MND 6 CHS

Farm Name: CONSOLIDATION COAL COMPA

API Well Number: 47-5101745

Permit Type: Horizontal 6A Well

Date Issued: 05/21/2014

ΔP	I N	um	ber:
Ar.	1 14	um	UCI.

PERMIT CONDITIONS

West Virginia Code § 22-6A-8(d) allows the Office of Oil and Gas to place specific conditions upon this permit. Permit conditions have the same effect as law. Failure to adhere to the specified permit conditions may result in enforcement action.

CONDITIONS

- This proposed activity may require permit coverage from the United States Army Corps of Engineers (USACE). Through this permit, you are hereby being advised to consult with USACE regarding this proposed activity.
- 2. If the operator encounters an unanticipated void, or an anticipated void at an unanticipated depth, the operator shall notify the inspector within 24 hours. Modifications to the casing program may be necessary to comply with W. Va. Code § 22-6A-5a (12), which requires drilling to a minimum depth of thirty feet below the bottom of the void, and installing a minimum of twenty (20) feet of casing. Under no circumstance should the operator drill more than fifty (50) feet below the bottom of the void or install less than twenty (20) feet of casing below the bottom of the void.
- 3. When compacting fills, each lift before compaction shall not be more than 12 inches in height, and the moisture content of the fill material shall be within limits as determined by the Standard Proctor Density test of the actual soils used in specific engineered fill, ASTM D698, Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort, to achieve 95 % compaction of the optimum density. Each lift shall be tested for compaction, with a minimum of two tests per lift per acre of fill. All test results shall be maintained on site and available for review.
- 4. Operator shall install signage per § 22-6A-8g (6) (B) at all source water locations included in their approved water management plan within 24 hours of water management plan activation.
- 5. Oil and gas water supply wells will be registered with the Office of Oil and Gas and all such wells will be constructed and plugged in accordance with the standards of the Bureau for Public Health set forth in its Legislative rule entitled Water Well Regulations, 64 C.S.R. 19. Operator is to contact the Bureau of Public Health regarding permit requirements. In lieu of plugging, the operator may transfer the well to the surface owner upon agreement of the parties. All drinking water wells within fifteen hundred feet of the water supply well shall be flow tested by the operator upon request of the drinking well owner prior to operating the water supply well.
- 6. Pursuant to the requirements pertaining to the sampling of domestic water supply wells/springs the operator shall, no later than thirty (30) days after receipt of analytical data provide a written copy to the Chief and any of the users who may have requested such analyses.
- 7. If any explosion or other accident causing loss of life or serious personal injury occurs in or about a well or well work on a well, the well operator or its contractor shall give notice, stating the particulars of the explosion or accident, to the oil and gas inspector and the Chief, within 24 hours of said accident.
- 8. During the casing and cementing process, in the event cement does not return to the surface, the oil and gas inspector shall be notified within 24 hours.
- 9. Operator shall provide the Office of Oil & Gas notification of the date that drilling commenced on this well. Such notice shall be provided by sending an email to DEPOOGNotify@wv.gov within 30 days of commencement of drilling.

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS WELL WORK PERMIT APPLICATION

1) Well Operator: Noble	Energy, Inc		494501907	Marshall	Franklin	Powhatan Point
			Operator ID	County	District	Quadrangle
2) Operator's Well Number:	MND 6 CHS	3	Well Pa	d Name: MNE	6	
3) Farm Name/Surface Own	er: Consolidation	Coal Co	ompany Public Roa	ad Access: CF	7/4-Fish	Creek Rd
4) Elevation, current ground	: 722'	E	levation, proposed	post-construct	ion: 721'	
5) Well Type (a) Gas Other	(Oil	Und	erground Stora	ge	
(b)If Gas	Shallow _	8	Deep			
OF CONTRACT					XL	4/29/14
6) Existing Pad: Yes or No	TALL BY WARRY CO.	W. W.	A TO A MAN A TO THE STATE OF TH	-		
 Proposed Target Formation Marcellus at 5895' and ! 					Pressure(s)	:
					100 Sec. 18	
8) Proposed Total Vertical I				a then plug ba	ck to 5940'	after logging.
9) Formation at Total Vertic	al Depth: On	ondag	ga for pilot			
10) Proposed Total Measure	d Depth: 17,	929'				
11) Proposed Horizontal Leg	g Length: 12,	289'				
12) Approximate Fresh Wat	er Strata Depth	s:	128' and 265'			
13) Method to Determine Fr	esh Water Dep	ths:	Offset well data			
14) Approximate Saltwater	Depths: Non	e note	ed in offsets			
15) Approximate Coal Seam	Depths: 284	' to 29	94'		RECE	NED Gas
 Approximate Coal Seam Approximate Depth to F 	ossible Void (coal m	ine, karst, other):	None anticipated		
17) Does Proposed well loca directly overlying or adjacer	ation contain co	al sea		No	NAM	0 8 2014 epartment of ental Protection
(a) If Yes, provide Mine Ir	nfo: Name:	1082	2' to nearest active	mining	MADI	nental
	Depth:	Base	e at 294' at deepe	st point	EUM	
	Seam:	Pitts	burgh		United States	
	Owner:	Mun	ray American Ener	rgy (Previously	Consol)	

WW-6B (9/13)

18)

CASING AND TUBING PROGRAM

ТУРЕ	Size	New or Used	Grade	Weight per ft. (lb/ft)	FOOTAGE: For Drilling	INTERVALS: Left in Well	CEMENT: Fill-up (Cu. Ft.)
Conductor	20"	New	LS	117#	40'	40'	CTS
Fresh Water	13 3/8""	New	LS	94#	694'	694'	CTS
Coal	10	.0	- 11	-11			0.
Intermediate	9 5/8"	New	J-55	36#	2017'	2017'	CTS
Production	5 1/2"	New	P110	20#	17,929'	17,929'	TOC 200' above 9.625 casing shoe
Tubing							
Liners							

XV 4/29/14

TYPE	Size	Wellbore Diameter	Wall Thickness	Burst Pressure	Cement Type	Cement Yield (cu. ft./k)
Conductor	20"	26"	0.375		Type 1/Class A	1.2
Fresh Water	13 3/8""	17 1/2"	.380	2730	Type 1/Class A	1.2
Coal	13 3/8"	17 1/2"	.380	2730	Type 1/Class A	1.2
Intermediate	9 5/8"	12 3/8"	.352	3520	Type 1/Class A	1.19
Production	5 1/2"	8 3/4" & 8 1/2"	.361	12,640	Type 1/Class A	1.27
Tubing						
Liners						

	PACKERS	Office of Oil and Gas
Kind:		1 0 0 CO.
Sizes:		Department of
Depths Set:		WAT Department of WVV Departmental Protection

WW-6B (9/13)

19) Describe proposed well work, including the drilling and plugging back of any pilot hole:
Drill the vertical depth 99' into the Onondaga at an estimated total vertical depth of approximately 6,049'. Log well then plug back to 5940' with solid cement plug. Drill Horizontal leg - stimulate and produce the Marcellus Formation. If we should encounter an unanticipated void we will install casing at a minimum of 20' below the void but not more than 100' below the void, set a basket and grout to surface.
20) Describe fracturing/stimulating methods in detail, including anticipated max pressure and max rate:
The stimulation will be multiple stages divided over the lateral length of the well. Stage spacing is dependent upon engineering design. Slickwater fracturing technique will be utilized on each stage using sand, water, and chemicals. See attached list. Maximum pressure not to exceed 10,000 lb.
21) Total Area to be disturbed, including roads, stockpile area, pits, etc., (acres):
22) Area to be disturbed for well pad only, less access road (acres): 7.3
23) Describe centralizer placement for each casing string:
No centralizers will be used with conductor casing. Surface casing will have bow spring centralizers on first 2 joints then every third joint to 100' from surface. Intermediate casing will have bow spring centralizers on first 2 joints then every third joint to 100' from surface. Production string will have a rigid bow spring every joint to KOP, rigid bow spring every third joint from KOP to top of cement.
24) Describe all cement additives associated with each cement type:
Conductor-1.15% CaCl *Surface and Coal (Intermediate)- Class A Portland Cement CaCl 2%, 2% Accelerator, 0.2% Antifoam and 0.125#/sk Flake. Excess Yield=1.18 Production- 14.8 ppg class A 25:75:0 System +2.6% Cement extender, 0.7% Fluid Loss additive, 0.45% high temp retarder, 0.2% friction reducer 15% Excess Yield=1.27 TOC greater or equal to 200' above 9.625" shoe.
200' above 9.625" shoe. *Surface and Coal string WVDEP approved variance attached. 25) Proposed borehole conditioning procedures: Constructor The hole is drilled w/sir and assing is run on sir. Apart from insuring the hole is clean via air his trilletion at TD.
Act Oil and
25) Proposed borehole conditioning procedures:
Conductor-The hole is drilled w/air and casing is run on air. Apart from insuring the hole is clean via air glibulation at TD, there are no other conditioning procedures. Surface-The hole is drilled w/air and casing is run on air. Fill with KCI water once drilled to TD. Once casing is at setting depth, circulate a minimum of one hole volume prior to pumping certain Coaph The hole is drilled and cased w/air or on Freshwater based mud. Once casing is at setting depth, the Dole is filled to KCI water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate-Orice surface casing is set and cemented, intermediate hole is drilled either on air or SOBM and filled with KCI water opcountied to TD. Production-The hole is drilled with SOBM and once to TD, circulated at maximum allowable pump rate for at least 6x bottoms up. Once on bottom with casing, circulate a minimum of one hole volume prior to pumping cement.
*Note: Attach additional sheets as needed.

PI Number 47 -	4	7	0	5	1	0	1	7	4	5	
Operator's Well No	MN	ID 6	CHS	;							

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION OFFICE OF OIL AND GAS

FLUIDS/ CUTTINGS DISPOSAL & RECLAMATION PLAN

Operator Name Noble Energy, Inc.	OP Code 494501907
Watershed (HUC 10)_Fish Creek Undefined (HUC 10)	Quadrangle Powhatan Point
Elevation 721' Post Construction County Marshall	District Franklin
11 so, pieuse describe annorpated pit waste.	op-No pit will be utilized If so, what ml.?
Proposed Disposal Method For Treated Pit Wastes:	11 50, What hit.
Land Application Underground Injection (UIC Permit Nu Reuse (at API Number_TBD-Next anticipe Off Site Disposal (Supply form WW-9 form CExplain_	nted well
Will closed loop system be used? If so, describe: Yes	
Drilling medium anticipated for this well (vertical and horizontal)? -If oil based, what type? Synthetic, petroleum, etc. Synthe Additives to be used in drilling medium? Please see attached	
Drill cuttings disposal method? Leave in pit, landfill, removed offs	ita ato Landfills
-If left in pit and plan to solidify what medium will be used	
-Landfill or offsite name/permit number?Please see attack	<u> </u>
on August 1, 2005, by the Office of Oil and Gas of the West Virgin provisions of the permit are enforceable by law. Violations of an	amined and am familiar with the information submitted on this my inquiry of those individuals immediately responsible for accurate, and complete. I am aware that there are significant
Company Official Signature Jamo Z. Welker	
Company Official (Typed Name) Laura Adkins	Environmental Protection
Company Official Title Regulatory Analyst	
Subscribed and sworn before me this day of	ARCH 20 14 OFFICIAL SEAL NOTARY PUBLIC, STATE OF WEST VIRGINIA CECIL L. TERRY, III THE UPS STORE
My commission expires 3/31/2	3501 M*CORKLE AVE. SE CHARLESTON, WV 25304 MY COMMISSION EXPIRES MARCH 3/2015

Chemical tist Including CAS#'s

Type: Friction Reducer (DWP-612)
Chemical Component as listed on MSDS: Long Chain Polyacrylamide
CAS: N/A

Type: Biocide (DWP-944)
14 Chemical Component as listed on MSDS: 2,2-Dibromo-3-nitrilopropionamide
CAS: 10222-01-2
2nd Chemical Component as listed on MSDS: Polyethylene Glycol Mixture
CAS: 25322-68-3

Type: Scale Inhibitor (DAP-901)

1st Chemical Component as listed on MSDS: Methanol

CAS: 67-56-1

2nd Chemical Component as listed on MSDS: Phosphoric Acid Ammonium Salt

CAS: Trade Secret

3nd Chemical Component as listed on MSDS: Ammonium Chloride

CAS: 12125-02-9

4th Chemical Component as listed on MSDS: Organic Phosphonate

CAS: Trade Secret

5th Chemical Component as listed on MSDS: Amine Salt

CAS: Trade Secret

6th Chemical Component as listed on MSDS: Oxyalkylated Polyamine

CAS: Trade Secret

Type: Surfactant (DWP-938)
Chemical Component as listed on MSDS: Soap
CAS: N/A

Type: Hydrochloric Acid Chemical Component as listed on MSDS: Hydrochloric Acid CAS: 7647-01-0

Type: PA Breaker (DWP-690)
Chemical Component as listed on MSDS: Hydrogen Peroxide
CAS: Trade Secret

Type: Gel Slurry (DWP-111)
Chemical Component as listed on MSDS: Viscosifier
CAS: N/A

Type: Oxidizer Breaker (DWP-901)
Chemical Component as listed on MSDS: Ammonium Persulfate
CAS: 7727-54-0

Type: Buffer (DWP-204)
Chemical Component as listed on MSDS: Formic Acid
CAS: 64-18-6

RECEIVED
Office of Oil and Gas

MAR 2 0 2014

WV Department of Environmental Protection

Site Water/Cuttings Disposal

Cuttings

Haul off Company:

Eap Industries, Inc. DOT # 0876278 1575 Smith Twp State Rd. Atlasburg PA 15004 1-888-294-5227

MAX Environmental Technologie 233 Max Lane Yukon, PA 25698 PAD004835146

Disposal Locations:

Apex Environmental, LLC Permit # 06-08438 11 County Road 78 Amsterdam, OH 43903 740-543-4389

Westmoreland Waste, LLC Permit # 100277 111 Conner Lane Belle Vernon, PA 15012 724-929-7694

Sycamore Landfill (Allied Waste) R30-07900105-2010 4301 Sycamore Ridge Road Hurricane, WV 25526 304-562-2611

<u>Water</u>

Haul off Company:

Dynamic Structures, Clear Creek DOT # 720485 3790 State Route 7 New Waterford, OH 44445 330-892-0164

Disposal Location:

Solidification

Waste Management, Arden Landfill Permit # 100172 RECEIVED

200 Rangos Lane
Office of Cil and Gas
Washington, PA 15301

724-225-1589


MAR 2 0 2014

Solidification/Incineration
Soil Remediation, Inc. Permit # 02-20753
6065 Arrel-Smith Road
Lowelville, OH 44436

WV Department of Environmental Protection Form WW-9

Operator's Well No. MND 6 CHS


Proposed Revegetation Treatme			
Lime 2 to 3 Fertilizer type	Tons/acre or to corre		Η
Fertilizer amount 50	0	lbs/acre	
Mulch Hay or s	straw at 2	_Tons/acre	
		Seed Mixtures	
Tem	porary	Perm	anent
Seed Type Tall Fescue	lbs/acre 40	Tall Fescue	lbs/acre 40
Ladino Clover	5	Ladino Clover	5
See site plans for	or full list	See site plans for	full list
provided)		land application (unless engineered plans in	cluding this info have bee
Drawing(s) of road, location, provided) Photocopied section of involve	d 7.5' topographic sheet		acluding this info have bee
Drawing(s) of road, location, provided) Photocopied section of involve Plan Approved by: Jim Ni	d 7.5' topographic sheet		
Drawing(s) of road, location, provided) Photocopied section of involve Plan Approved by: Jim Ni	icholson WV	OOG State Inspector	- 00
Orawing(s) of road, location, provided) Photocopied section of involve Plan Approved by: Jim Ni Comments:	icholson WV	OOG State Inspector	RECEIV Office of Oil

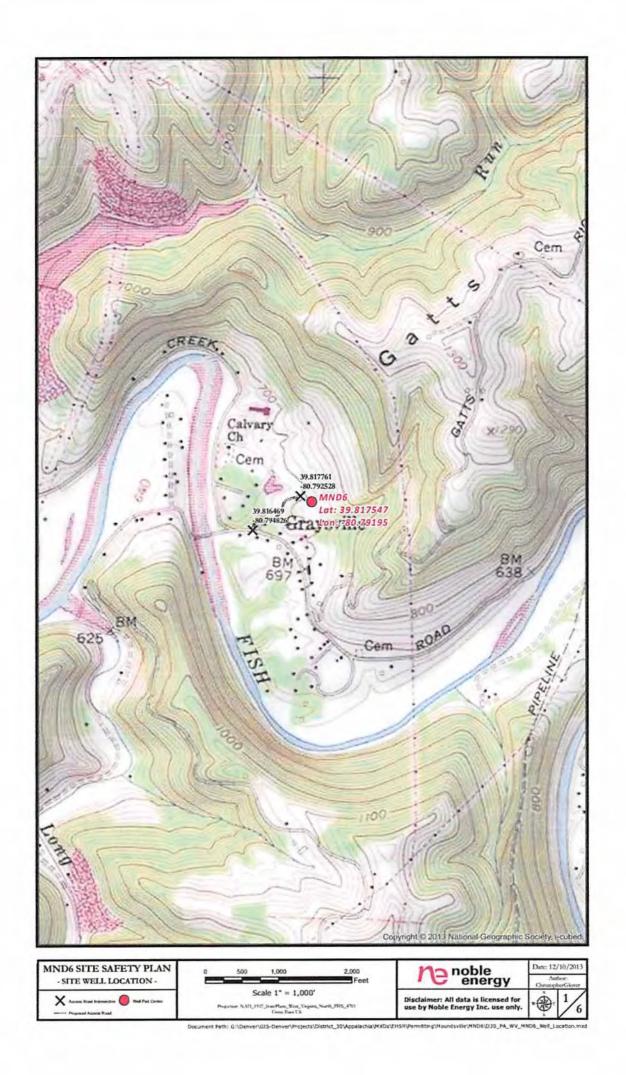

Office of Oil and Gas

MAR 2 0 2014

WV Department of Environmental Protection

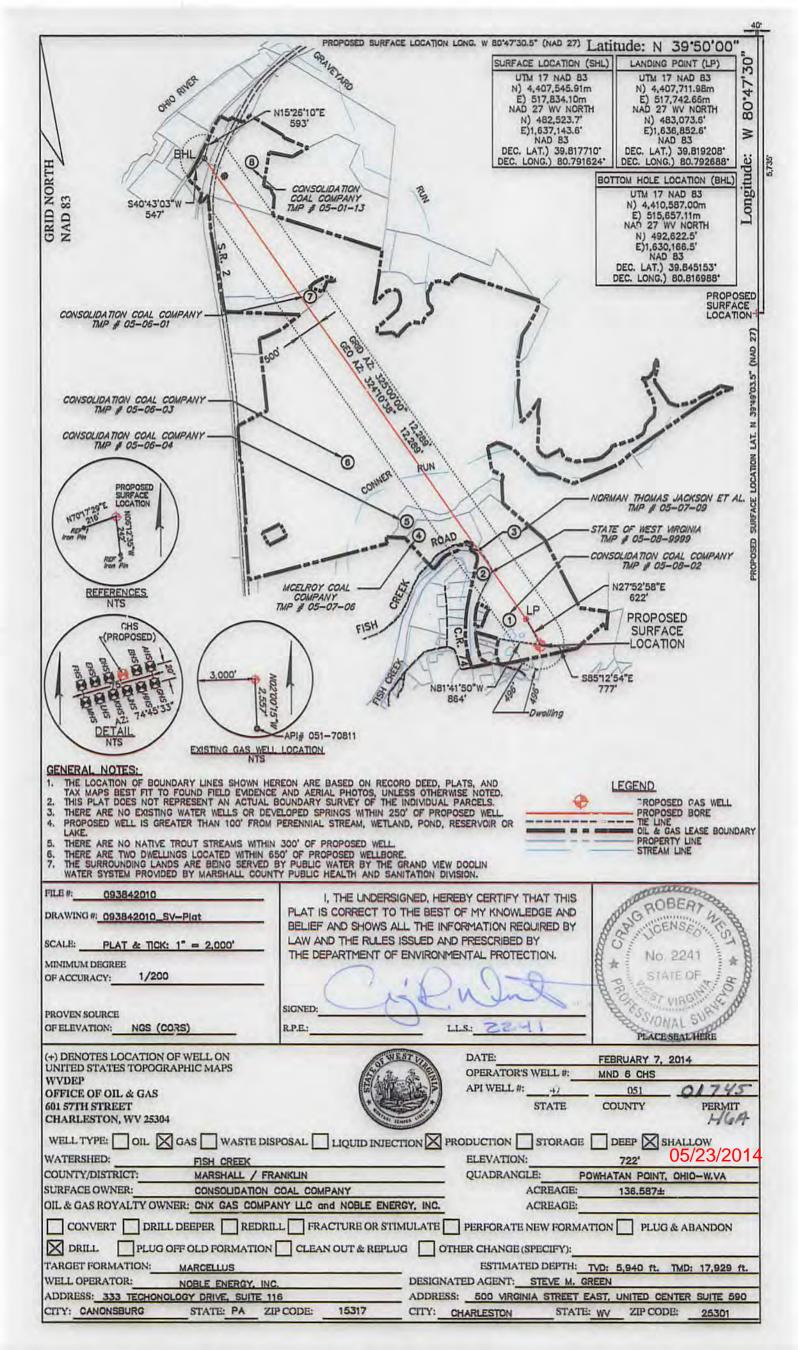

4705101745

