Latitude

.655 .91w

Topo Location

7.5' Loc.______ 15' Loc._____ (calc.)

Company Consolidation Coal Co

Farm Shirley 5 Walker # 3869


15' Quad ______

7.5' Quad Mannington

District Ballello

WELL LOCATION PLAT

County ol Permit 809 p

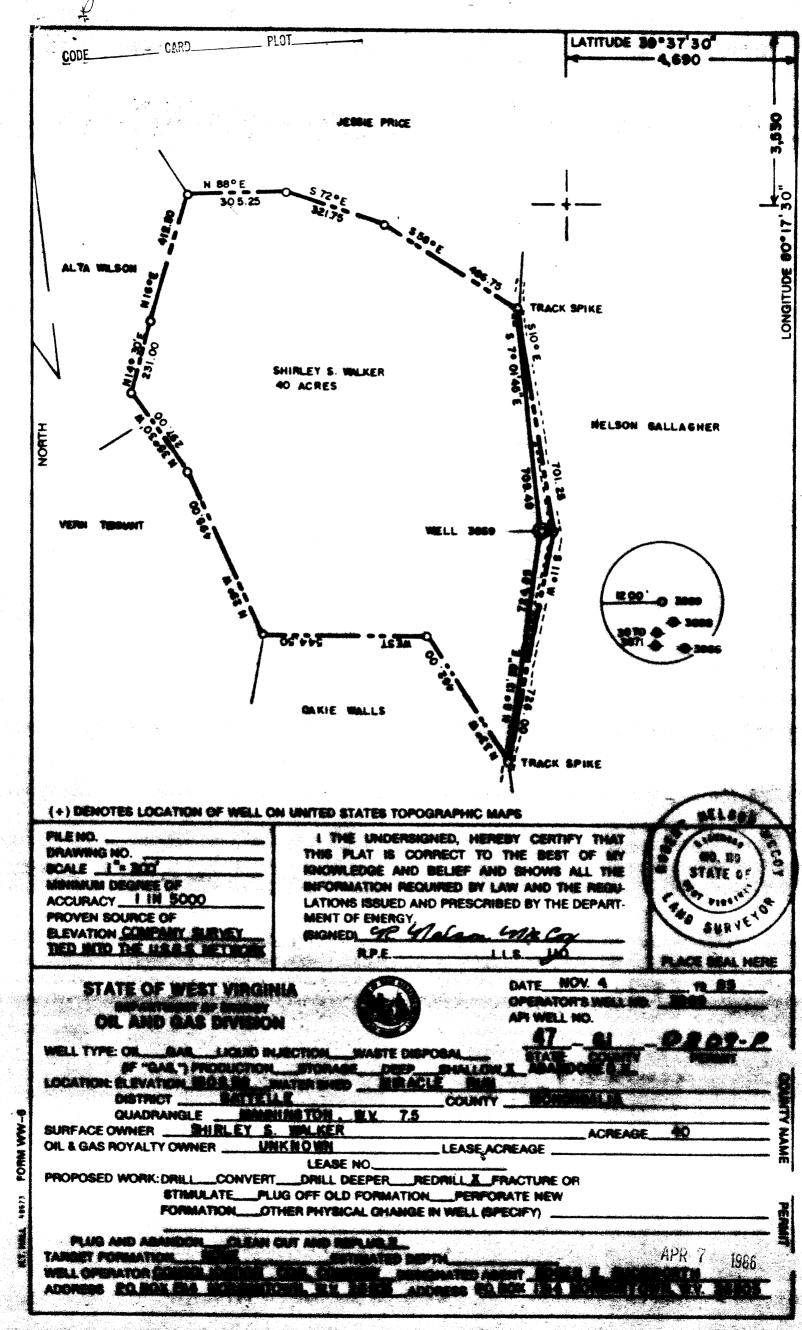

FORM WR-38 (Affidavit of Plugging)

STATE OF WEST VIRGINIA DEPARTMENT OF ENERGY OIL AND CAS WELLS DIVISION

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

Consolidation Coal Company	Consolidati	ion Coal Company	
Coal Operator or Owner	Name of Well Operator		
P. O. Box 1314 Morgantown, WV 26507-1314	P. O. Box 1	1314, Morgantown, W	· · · · · · · · · · · · · · · · · · ·
Address		Complete Address	
Coal Operator or Owner	WE	May 28	19 89
cour operator or owner	Batte	•	District
Address			
Shirley Sue Walker	Monor	ngalia	County
Lease or Property Owner	-		•
Box 153, Blacksville, WV 25681	WELL NO.	3869-A	
Address			
	Shirley S	Sue Walker	Farm
STATE INSPECTOR SUPERVISING PLUGGING Dor	Ellis, 2604 Craba	apple Lane, Fairmor	t, WV 26554
ΛF	FIDAVIT		
STATE OF WEST VIRGINIA.			
County of Harrison ss:			
County of			
Calcin C. Lofton being first duly sworn according to law	and Georg		unand in the
work of plugging and filling oil and gas			
Coal Company , well operator, an	l participated in	the work of pluggi	ng and fill-
ing the above well, that said work was c	ommenced on the	15th day of Ma	ıy•
19 89, and that the well was plugged	and filled in the	following manner:	
			
	Material	Plugs Used	Casing
Formation 2/00 1 1		Size & Kind	PULLED LEFT IN
	hole to 7 7/8".		
	asing remaining difficulty working		
with 8". 8" left in coal, perforated 8'	casing 30 holes		
in coal section. Ran coal protection s	tring as follows:		
299.85' of 2 3/8" tubing followed by 1.4	54.50 ' of 45"		
casing. Latch down plug at 1,434.70'. 1,454.50'. Swedge at 1,455.50'. Circul	float valve at	TISTE VALETY	777
surface as follows: Pumped 925 sacks of	poz mix followed	1/2/55	VICINI
by 160 sacks of thixatropic dement. Use	d 1.000 gallons of	f	
mud flush. Displaced cement to 1,434.7 Let set, bailed dry.	0' with water.	JUN 2 I	1909
Ran 7 7/8" bit thru coal seam. Ran 10"	mill 1,155 feet	DIVISION OF O	L & GAS
		DEPARTMENTO	HENERSY .
TOTAL DEPTH: 1,754.35 feet			A 8/28/2
Coal Seams Pittsburgh 1,311 f	eet to 1,320 feet	Description of	f Monument '
(Name)		5 feet of 4½" ca	
(Name)		plaque stating:	1
(Name)		Consol WV #38694 47-061-0809-P	
			29 th 4
and that the work of plugging and i	illing said well	was completed on the	he Zoth day
And further deponents saith not.			
Lunge R Den.			
Sworn to and subscribed before me this 28th day of May, 19 89			
Imoth/ OK			
	Ima	7/ / / () /	

My commission expires: April 21, 1993

Permit No. 47-061-0809-P