

west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax Earl Ray Tomblin, Governor
Randy C. Huffman, Cabinet Secretary
www.dep.wv.gov

PERMIT MODIFICATION APPROVAL

October 07, 2013

ANTERO RESOURCES APPALACHIAN CORPORATION 1625 17TH STREET, SUITE 300 DENVER, CO 80202

Re: Permit Modification Approval for API Number 8509986 , Well #: LEFT FORK UNIT #2H extended lateral

Oil and Gas Operator:

The Office of Oil and Gas has reviewed the attached permit modification for the above referenced permit. The attached modification has been approved and well work may begin. Please be reminded that the oil and gas inspector is to be notified twenty-four (24) hours before permitted well work is commenced.

Please call James Martin at 304-926-0499, extension 1654 if you have any questions.

Sincerely,

Gene Smith

Regulatory/Compliance Manager

Office of Oil and Gas



May 3, 2013

Antero Resources 1625 17th Street Denver, Colorado 80202 Office 303.357.7310 Fax 303.357.7315

West Virginia Department of Environmental Protection Office of Oil and Gas Attn: Ms. Laura Cooper 601 57th Street Charleston, WV 25304

Ms. Laura Cooper:

Antero Resources Appalachian Corporation (Antero) would like to submit the following permit modifications for three approved wells on the Lockhart Heirs West Pad. We are requesting to extend the horizontal lateral which will change the bottom hole locations of the Left Fork Unit 1H (API# 47-085-09985), Left Fork Unit 2H (API# 47-085-09986) and Left Fork Unit 3H (API# 47-085-09987).

Attached you will find the following documents:

- > REVISED Forms WW-6B, which show the revised MDs and Production Casing/Cement programs
- > REVISED Forms WW-6A1, which show the additional leases we will be drilling into
- > REVISED Mylar Plats, which show the new bottom hole locations

If you have any questions please feel free to contact me at (303) 357-7323.

Thank you in advance for your consideration.

12 Milialem

Sincerely,

Ashlie Mihalcin

Permit Representative

Antero Resources Appalachian Corporation

Enclosures

Received Office of Oil & Gas

MAY - 9 2013

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS WELL WORK PERMIT APPLICATION

							Т
1) Well Operator:	Antero Resou	rces Appalach	ian Corporation	494488557	085-Ritchie	Union	Pullman 7.5'
	1,-24-,			Operator ID	County	District	Quadrangle
2) Operator's Well	Number:	Left Fork Unit	2H	V	Vell Pad Nam	e: Lockhart Heirs	West Pad
3 Elevation, current ground: 1022' Elevation, proposed post-construction: 1022'							1022'
4) Well Type: (a)	Gas		Oil	Underground	d Storage		
Other							
(b)		hallow		Deep			
		orizontal					
5) Existing Pad? Y	es or No:	Yes					
6) Proposed Targe	t Formation(s), Depth(s), Anticipat	ed Thicknesses and	d Associated	Pressure(s):	
Marcellus Shale: 66700'	TVD, Anticipated T	hickness- 50 Fe	et, Associated Pres	sure- 3,000#			
7) Proposed Total	Vertical Dep	oth: 6	700' TVD				
8) Formation at To	tal Vertical	Depth:	Marcellus				
9) Proposed Total	Measured D	epth:	16400' MD				
10) Approximate F	Fresh Water	Strata Dep	ths: _19	00', 258'			
11) Method to Det	ermine Fresl	n Water De	epth: 0	ffset well records. Depths h	nave been adjusted a	according to surface	e elevations.
12) Approximate S	Saltwater De	pths:	1712', 2040'				
13) Approximate Coal Seam Depths: None available							
14) Approximate Depth to Possible Void (coal mine, karst, other): None anticipated							
15) Does proposed well location contain coal seams directly overlying or adjacent to an active mine? If so, indicate name and depth of mine:							
16) Describe proposed well work: Drill, perforate, fracture a new horizontal shallow well and complete Marcellus Shale							
*Antero will be air drilling the fresh water string which makes it difficult to determine when freshwater is encountered, therefore we have built in a buffer for the casing							
setting depth which helps	s to ensure that all f	resh water zone	s are covered.				
17) Describe fracti	aring/stimula	ating meth	ods in detail	:			
Antero plans to pump S	ickwater into the M	arcellus Shale fo	rmation in order to	ready the well for production	n. The fluid will be cor	mprised of approxim	ately 99 percent
water and sand, with les	s than 1 percent sp	ecial-purpose ad	lditives as shown in	the attached "List of Anticipation	ated Additives Used f	or Fracturing or Stim	nulating Well."
6150				Received			
18) Total area to be disturbed, including roads, stockpile area, pits, etc, (acres):							
19) Area to be disturbed for well pad only, less access road (acres): 6.14 acres							
				5 2013			Page 1 of 3

20)

CASING AND TUBING PROGRAM

ТҮРЕ	Size	New or Used	Grade	Weight per ft.	FOOTAGE: For Drilling	INTERVALS: Left in Well	CEMENT: Fill -up (Cu. Ft.)
Conductor	20"	New	H-40	94#	40'	40'	CTS, 38 Cu. Ft.
Fresh Water	13-3/8"	New	J-55/H-40	54.5#/48#	400'	400'	CTS, 556 Cu. Ft.
Coal	9-5/8"	New	J-55	36#	2500'	2500'	CTS, 1018 Cu. Ft.
Intermediate							
Production	5-1/2"	New	P-110	20#	16400'	16400'	4108 Cu. Ft.
Tubing	2-3/8"	New	N-80	4.7#		7200'	
Liners							

ТҮРЕ	Size	Wellbore Diameter	Wall Thickness	Burst Pressure	Cement Type	Cement Yield
Conductor	20"	24"	0.438"	1530	Class A	1.18
Fresh Water	13-3/8"	17-1/2"	0.38"/0.33"	2730/1730	Class A	1.18
Coal	9-5/8"	12-1/4"	0.352"	3520	Class A	1.18
Intermediate						
Production	5-1/2"	8-3/4" & 8-1/2"	0.361"	12630	Lead-H/POZ & Tail - H	H/POZ-1.44 & H-1.8
Tubing	2-3/8"	4.778"	0.19"	11200		
Liners						

PACKERS

Kind:	N/A		
Sizes:	N/A		
Depths Set:	N/A		

Received Office of Oil & Gas

MAY - 9 2013

Page 2 of 3

21) Describe centralizer placement for each casing string.	Conductor: no centralizers
Surface Casing: one centralizer 10' above the float shoe, one or	n the insert float collar and one every 4th joint
spaced up the hole to surface.	
Intermediate Casing: one centralizer above float joint, one cen	tralizer 5' above float collar and one every 4th collar
to surface.	
Production Casing: one centralizer at shoe joint and one every 3	3 joints to top of cement in intermediate casing.
22) Describe all cement additives associated with each cement Conductor: no additives, Class A cement.	type.
Surface: Class A cement with 2% calcium and 1/4 lb flake, 5 ga	allons of clay treat
Intermediate: Class A cement with 1/4 lb of flake, 5 gallons of c	lay treat
Production: Lead cement- 50/50 Class H/Poz + 1.5% salt + 1% C-45	5 + 0.5% C-16a + 0.2% C-12 + 0.45% C-20 + 0.05% C-51
Production: Tail cement- Class H + 45 PPS Calcium Carbonate + 1.0% F	FL-160 + 0.2% ACGB-47 + 0.05% ACSA-51 + 0.2% ACR-20

23) Proposed borehole conditioning procedures.

Surface: blowhole clean with air, trip to conductor shoe, trip to bottom, blowhole clean with air, trip out, run casing, circulate pipe capacity + 40 bbls fresh water followed by 25 bbls bentonite mud, 10 bbls fresh water spacer.


Intermediate: blowhole clean with air, trip to surface casing shoe, trip to bottom, blowhole clean with air, trip out, run casing, circulate 40 bbls brine water followed by 10 bbls fresh water and 25 bbls bentonite mud, pump 10 bbls fresh water.

Production: circulate with 14 lb/gal NaCl mud, trip to middle of lateral, circulate, pump high viscosity sweep, trip to base of curve, pump high viscosity sweep, trip to top of curve, trip to bottom, circulate, pump high viscosity sweep, trip out, run casing, circulate 10 bbls fresh water, pump 48 bbls barite pill, pump 10 bbls fresh water followed by 48 bbls mud flush and 10 bbls water.

Received Office of Oil & Gas

MAY - 9 2013

^{*}Note: Attach additional sheets as needed.

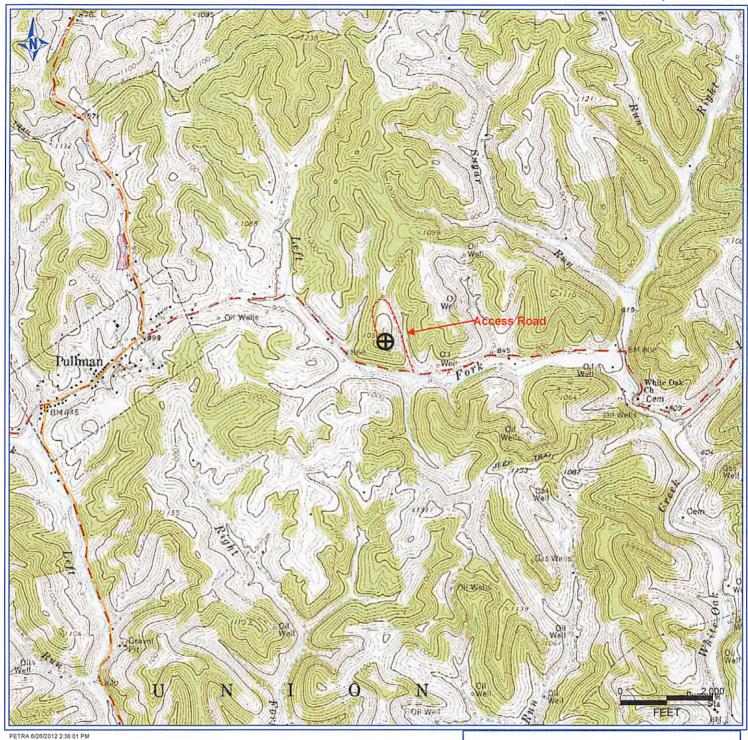


PEGENTED...
Omoso: On a Geo
Jul 19 2012

Antero Resources Corporation

APPALACHIAN BASIN

Left Fork Unit 2H Ritchie County



REMARKS
QUADRANGLE: PULLMAN
WATERSHED: LEFT FORK
DISTRICT: UNION

10/11/2013

Date: 7/05/2012

