

END

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

COALQUEST DEVELOPMENT, LLC
Coal Operator or Owner
100 TYGART DRIVE GRAFTON, WV 26354

COALQUEST DEVELOPMENT, LLC
Coal Operator or Owner
100 TYGART DRIVE GRAFTON, WV 26354

Address
RICHARD C. & SYLVIA D. KNOTTS
Lease or Property Owner
577 SHUMAKER RIDGE ROAD THORNTON, WV 26440
Address

ICG TYGART VALLEY, LLC.
Name of Well Operator
100 TYGART DRIVE GRAFTON, WV 26354

Complete Address
THORNTON 7.5
Well Location
KNOTTSVILLE

District
TAYLOR
County
A-798
Well No.

EARL M. HERSHAMN, RICHARD KNOTTS
Farm

STATE INSPECTOR SUPERVISING PLUGGING

Samuel Reynolds

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

RALPH K. HARMAN and MATTHEW A. YEARSLEY being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 15TH day of July, 2019 and that the well was plugged in the following manner:

Sand or Zone Record	Filling Material	Casing/Tubing Size	Casing Pulled	Casing Left In
Formation				
Cleaned a 3 3/4" hole through a 4 1/2" casing from surface to 4236'. Tagged solid plug at 4236'. Cemented bottom hole with 60 sacks of Expandable Cement with Gas blocker additive from 4236' to 3178'. Removed to 3178' of 4 1/2" casing from surface to 3178'. Left 1093' of 4 1/2" casing from 3178' to 4271'. Cleaned a 7 7/8" hole from surface to 3178'. Set intermediate plug from 3178' to 854' with 550 sacks of Expandable Cement. Section milled 8 5/8" casing from 436' to 464' through the Lower Kittanning Coal Seam (448' to 454'). Left 436' of 8 5/8" casing from surface to 436' and 615' from 464' to 1079'. Due to extreme bond of 8 5/8" casing, no additional perforation or rips were required per Leer Mines 101C Petition. Casing depths were taken from previous well records.	4 1/2" Casing 8 5/8" Casing 16" Conductor	3178' Milled 28' 0	1093' 1051' 5'	
Cement hole from 845' to surface as follows:				
From 854' to 248' with 180 sacks of Expandable Cement. From 248' to surface with 80 sacks of Expandable Cement. Cement did circulate at surface. Left 5' of 16" Conductor in well from surface to 5'.				
Coal Seams		Description of Monument		
<u>Lower Kittanning</u>	(448' - 454')	77" of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to cement plug at ground level.		

... and that the work of plugging and filling said well was completed on the 31st day of July, 2019


And further deponents saith not.

R. K. Harman
Ralph K. Harman
Matthew A. Yearsley
Matthew A. Yearsley

Sworn to and subscribed before me this 8th day of Aug 2019

Carol A. Mayle 06/28/2024
Notary Public

My commission expires:

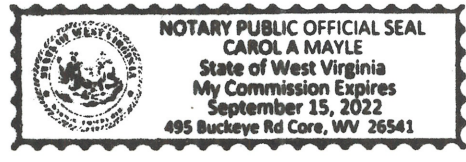

Permit No. 47-091-00174
Well No. A-798
Latitude: 39° 18' 26"N
Longitude: 79° 55' 41"W