

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

COALQUEST DEVELOPMENT, LLC
Coal Operator or Owner
2708 CRANBERRY SQUARE MORGANTOWN, WV 26508
Address
COALQUEST DEVELOPMENT, LLC
Coal Operator or Owner
2708 CRANBERRY SQUARE MORGANTOWN, WV 26508
Address
DELORES GAIL HUGGINS
Lease or Property Owner
2839 RIDGEDALE ROAD, MORGANTOWN, WV 26508
Address

ICG TYGART VALLEY, LLC
Name of Well Operator
2708 CRANBERRY SQUARE MORGANTOWN, WV 26508
Complete Address
THORNTON (638)
Well Location
KNOTTSVILLE
District
TAYLOR
County
HUGNS/LUZADER#1
Well No.
HUGGINS, DOLORIS & THOMAS
Farm

STATE INSPECTOR SUPERVISING PLUGGING

Conrad L. Huggins 7-28-14

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of **MONONGALIA** ss:

RUSSELL SMALLWOOD and **KEVIN S. WRIGHT** being first duty sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by ICG Tygart Valley, LLC well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 28th day of May, 2014 and that the well was plugged in the following manner:

Formation	Filling Material	Casing Size & Kind	Casing Pulled	Casing Left In
Cleaned 3 1/2" hole from Surface to 5083'. Tagged solid plug at 5083'. Cemented bottom hole from 5083' to 1509' with 215 sacks of Expandable Cement with Gas Blocker. Removed 1509' of 4 1/2" casing from Surface to 1509'. Left approximately 3754' of 4 1/2" casing in the hole from 1509' to ~5263' (Depth taken from old well record). Clean 7 7/8" hole from Surface to 1509'. Tagged top of bottom hole plug at 1509'. Section milled 8 5/8" casing from 684' to 718'. Possible small junk metal through the Lower Kittanning Coal seam from 694.6' to 699.8'. Left 988' of 8 5/8" casing in the hole from Surface to 684' and 718' to 1022'.		16" Casing	0'	6 1/2'
		8 5/8" Casing	Milled 34'	988'
		4 1/2" Casing	1509'	~5263'
Cemented hole from 1509' back to surface as follows: From 1509' to 1110' with 95 sacks of Expandable Cement. From 1110' to 570' with 155 sacks of Thixotropic Cement with green dye. From 570' back to the Surface with 175 sacks of Expandable Cement. Cement did circulate at the surface. Left 6 1/2" of 16" conductor casing in the hole from the surface to 6 1/2'.				
Coal Seams		Description of Monument		
LOWER KITTANING	694.6' to 699.8'	77" of 7" casing w/company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to the cement plug at ground level.		
(Name)				
(Name)				
(Name)				

... And that the work of plugging and filling said well was completed on the 11th day of June, 2014

And further deponents saith not.

Russell Smallwood
Russell Smallwood


Stephan C. Moats
Stephan Moats

Sworn to and subscribed before me this 14th day of July 2014

Carol A. Mayb
Notary Public

My commission expires: 9-12-2017

Permit No. 47-91-00880-P
Well No. HUGNS/LUZADER#1

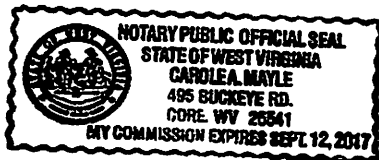

RECEIVED
Office of Oil and Gas

NOV 24 2014

WV Department of Environmental Protection 11/28/2014