



west virginia department of environmental protection

Office of Oil and Gas
601 57th Street SE
Charleston, WV 25304
(304) 926-0450
(304) 926-0452 fax

Earl Ray Tomblin, Governor
Randy C. Huffman, Cabinet Secretary
www.dep.wv.gov

PERMIT MODIFICATION APPROVAL

October 16, 2014

STATOIL USA ONSHORE PROPERTIES, INC.
2103 CITYWEST BOULEVARD - SUITE 800
HOUSTON, TX 77042

Re: Permit Modification Approval for API Number 10302929, Well #: GREEN DOT UNIT II 6H
Revised Freshwater Casing

Oil and Gas Operator:

The Office of Oil and Gas has reviewed the attached permit modification for the above referenced permit. The attached modification has been approved and well work may begin. Please be reminded that the oil and gas inspector is to be notified twenty-four (24) hours before permitted well work is commenced.

Please call James Martin at 304-926-0499, extension 1654 if you have any questions.

Sincerely,

Gene Smith
Assistant Chief of Permitting
Office of Oil and Gas



August 13, 2014

West Virginia Department of Environmental Protection
Office of Oil and Gas
601 57th Street, SE
Charleston, WV 23504-2345

Attention: Ashley LeMasters

Reference: Green Dot II 6H (API No. 47-103-02929)
Casing Revision & Secondary Containment Modification

Ms. LeMasters:

Attached please find revised WW-6B and Wellbore Schematic for the Green Dot Unit II 6H (API No. 47-103-02929) revising the freshwater casing setting depth (signed by the inspector). Statoil is preparing to commence drilling operations on the Green Dot wells on or about November 14, 2014 after drilling the Jolliffe wells.

Currently the freshwater casing is permitted to 500'; however, there was a study done by the state of WV (1980 Fresh & Saline Groundwater of WV by James B. Foster) that indicates the freshwater depth is actually deeper, at 763' in lieu of 320'. Though there is no evidence other than the study that the freshwater is deeper, as a prudent operator Statoil would like approval to set the casing deeper than originally permitted. Since a revision to the freshwater casing was required, Statoil took the opportunity to also revise the intermediate casing depth to set through the Big Injun.

Additionally, per my conversation with Gene Smith on 8/12/14, in order to reduce the footprint, Statoil will not be installing earthen berms around the perimeter of our existing locations. The current plans for secondary containment are as follows:

1. Remove the top surface layer of stone and place a liner down over the entire area of the pad and then re-place the stone back over the liner.

RECEIVED
Office of Oil and Gas

AUG 13 2014

WV Department of
Environmental Protection

10/17/2014


47 10302929
MOD

Page 2

2. We will then install either a Jersey Barrier or HDPE pipe around the perimeter of the low areas of the pad to take the place of the earthen berms (Which will take up less space). The liner will overlap either the barrier or pipe and will be toed in on the opposite side to ensure nothing leave the site.

If you have any questions or require additional information, please contact the undersigned at 713-485-2640 or at BEKW@statoil.com.

Sincerely,



Bekki Winfree
Sr. Regulatory Advisor – Marcellus

Attachment

RECEIVED
Office of Oil and Gas

AUG 13 2014

WV Department of
Environmental Protection

10/17/2014

4710302929
MOD

STATE OF WEST VIRGINIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS
W.VA. CODE §22-6A - WELL WORK PERMIT APPLICATION

1) Well Operator: Statoil USA Onshore Properties Inc. 494505083 Wetzel Clay Littleton 7.5'
Operator ID County District Quadrangle

2) Operator's Well Number: Green Dot Unit II 6H Well Pad Name: Green Dot Unit II

3 Elevation, current ground: 1476' Elevation, proposed post-construction: 1476' **already built**

4) Well Type: (a) Gas Oil
Other
(b) If Gas: Shallow Deep
Horizontal

5) Existing Pad? Yes or No: Yes

DMH 8-11-14

6) Proposed Target Formation(s), Depth(s), Anticipated Thicknesses and Associated Pressure(s):
Marcellus Shale: Formation Top - 7586' TVD, 50' Thick, 0.62 psi/ft

7) Proposed Total Vertical Depth: 7649'

8) Formation at Total Vertical Depth: Marcellus Shale

9) Proposed Total Measured Depth: 14,310'

10) Approximate Fresh Water Strata Depths: 130' - 320', 763'

11) Method to Determine Fresh Water Depth: Local water well data & 1980 study "Freshwater & Saline Groundwater of WV" by James Foster

12) Approximate Saltwater Depths: 2150'

13) Approximate Coal Seam Depths: 755'

14) Approximate Depth to Possible Void (coal mine, karst, other): N/A

15) Does land contain coal seams tributary or adjacent to, active mine? No

16) Describe proposed well work: Drill and stimulate a horizontal well in the Marcellus Shale.

17) Describe fracturing/stimulating methods in detail:
The well will be stimulated by multi-stage fracturing using a slickwater fluid.

18) Total area to be disturbed, including roads, stockpile area, pits, etc, (acres): 2.18 ac **pad already built**

19) Area to be disturbed for well pad only, less access road (acres): 1.83 ac **pad already built**

RECEIVED
Office of Oil and Gas
AUG 13 2014
WV Department of
Environmental Protection

4710302929

MOD

20)

CASING AND TUBING PROGRAM

TYPE	Size	New or Used	Grade	Weight per ft.	FOOTAGE: For Drilling	INTERVALS: Left in Well	CEMENT: Fill -up (Cu. Ft.)
Conductor	20"	New	H-40	94#	100'	100'	Grouted to surface 120 cu. ft.
Fresh Water	13-3/8"	New	J-55	54.5#	850'	850'	Cement to surface 832 cu. ft.
Coal	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Intermediate	9-5/8"	New	J-55	36#	2850'	2850'	Cement to surface 1172 cu. ft.
Production	5-1/2"	New	P-110	20#	14,310'	14,310'	Cement to 1835 ft, 3181 cu. ft.
Tubing							
Liners							

DMH 8-11-14

TYPE	Size	Wellbore Diameter	Wall Thickness	Burst Pressure	Cement Type	Cement Yield
Conductor	20"	26"	.438"	1530 psi	Class "A"	1.3 cuft/sk
Fresh Water	13-3/8"	17-1/2"	.380"	2730 psi	Class "A"	2.31 cuft/sk
Coal	N/A	N/A	N/A	N/A	N/A	N/A
Intermediate	9-5/8"	12-1/4"	.352"	3520 psi	Class "A"	2.31 cuft/sk
Production	5-1/2"	8-1/2"	.362"	12,640 psi	Class "A"	1.37 cuft/sk
Tubing						
Liners						

PACKERS

Kind:				
Sizes:				
Depths Set:				

RECEIVED
Office of Oil and Gas

AUG 13 2014

WV Department of
Environmental Protection

10/17/2014

21) Describe centralizer placement for each casing string.

Conductor - None

Fresh Water - 1 bow spring centralizer 10' from shoe, 1 bow spring centralizer every 4 joints to surface

Intermediate - 1 bow spring centralizer 10' from shoe, 1 bow spring centralizer every 3 joints to surface

Production - 1 spiroglide centralizer 10' from shoe, 1 spiroglide centralizer mid joint on second joint

1 spiroglide centralizer every joint to 45 deg, 1 bowspring centralizer every other joint to KOP, double bow spring centralizers every fourth joint to 2000'.

22) Describe all cement additives associated with each cement type.

DMH 8-11-14

Conductor - None

Fresh Water - Class A Cement with 3% Calcium Chloride

Intermediate - Accelerator (CaCl₂), Expansion / Thixotropic (W-60), Retarder (HR-7)

Production (lead) - Gel / Extender (Bentonite), Fluid Loss / Gas Migration (CFL-117), Retarder (HR-7), Defoamer

Production (tail) - Gel / Extender (Bentonite), Fluid Loss / Gas Migration (CFL-117), Retarder (HR-7), solubility enhancer (for acid solubility)

Note Names and types of additives may vary depending on vendor availability

23) Proposed borehole conditioning procedures.

Conductor - Circulate clean

Fresh Water - Circ. hole clean at TD, Fill casing with water, Pump 20 bbl water, 25 bbl gel spacer, and 5 bbl water.

Intermediate - Circ. hole clean at TD, Fill casing with water, Pump 20 bbl water, 25 bbl gel spacer, and 5 bbl water.

Production - Circ. hole clean at TD, Pump 50 bbl tuned spacer, 5 bbl water

Note tuned spacer is a combination gelled / weighted mud flush spacer, can be substituted with alternating gelled spacers and weighted mud flushes. Borehole conditioning will be dictated by hole conditions.

*Note: Attach additional sheets as needed.

RECEIVED
Office of Oil and Gas

AUG 13 2014

WV Department of
Environmental Protection 10/17/2014



Marcellus - Drilling Well Schematic

4710302929 MOD

Well Name: Green Dot II 6H
 Field Name: Marcellus
 County: Wetzel
 API #: 47-10302929

BHL: X = 4393831.2
 SHL: X = 4392655.6

GLE (ft): 1,476
 DF(R): 22
 Y = 537177.9
 Y = 538823.1

VDR: 649
 TMD(R): 14,310
 Profile: Horizontal
 AFE No: 0

Formations & Csg Points	Depth, ft			Form. Temp. (F)	Pore Press. (EMW)	Frac Gradient (EMW)	Planned MW	Measure Depth (ft)	Program	Details
	MD	TVD	SS							
Conductor	100	100	1,398	-	-	-	-	100		20" Conductor
Pittsburgh Coal		0					9.2			17-1/2" Surface
Red Clay		0					9.2			
Approximate Fresh Water Strata ~763'										
Casing Point	850	850	648	65	-	-	-	850		
1st Salt Sand		0					9.2			FIT/LOT: 14.0 ppg EMW
2nd Salt Sand		0					9.2			12-1/4" Intermediate
3rd Salt Sand		2,403					9.2			
Maxton Sand		0					9.2			
Keener Sand		0					9.2			
Big Lime		0					9.2			
Big Injun		2,748					9.2			
Casing Point	2,850	2,850	-1,352	82	-	>18.0	-	2,850		
Berea Sand		3,112					8.6			
Gordon Sand		3,349					8.6			
Java		5,712					8.6			
Angola		0					8.6			
Rhinestreet		0					8.6			
Cashaqua		0					8.6			
Middlesex		0					8.6			
KOP	6,914	6,901					13.0			
West River		7,402					13.0			
Genesco		7,479					13.0			
Marcellus		7,640					13.0			
Landing point	8,367	7,659					13.0			
Cherry Valley		7,670					13.0			
Onondaga		7,690					13.0			

TOC @ 1850

20" Conductor
 Profile: Vertical
 Bit Type: 17-1/2" Tri-Cone
 BHA: Rotary Assembly
 Mud: 9.2 ppg Fresh Water
 Surveys: n/a
 Logging: n/a
 Casing: 13.375 54.5 J-SS BTC at 850' MD/850' TVD
 Centralizers: 1 centralizer w/ stop collar 10 ft above float shoe. One Single Bow every joint to 100ft below surface.
 Cement: 15.8 ppg Tail slurry w/ TOC @ Surface
Potential Drilling Problems: Stack Pipe, Floating, Collision

12-1/4" Intermediate
 Profile: Vertical
 Bit Type: 12-1/4" Kymera
 BHA: 8in 6/7 Lobe 4.0 Stg 1.5 ABH (0.17 rpg/620 Diff)
 Mud: 9.2 ppg 5% KC
 Surveys: Gyro SS, MWD - EM Pulse
 Logging: n/a
 Casing/Liner: 9.625 36 J-SS BTC at 2850' MD/2850' TVD
 Csg Hanger: Fluted Mandrel Hanger
 Centralizers: 1 centek centralizer w/ stop collar 10 ft above float shoe. 1 centek centralizer w/ stop collar 10 ft above float collar. 1 centralizer every joint for the first 15 joints. One centralizer every 3 jnts to 100ft below surface.
 Cement: 15.8 ppg Tail slurry w/ TOC @ Surface
Potential Drilling Problems: Hole Cleaning, Poor ROP, Buckling

8-1/2" Production
 Profile: Vertical
 Bit Type: 8-1/2" PDC
 BHA: 6.75in 6/7 lobe 5.0 stg 1.95 FBH .29 rpg 715 DIFF
 Mud: 8.6 - 13 ppg SBM
 Surveys: MWD - EM Pulse w/ 30ft surveys in curve, 100ft surveys in lateral
 Logging: GR
 Casing/Liner: 5.5 20 P110EC VAM TOP HT at 14310 ft MD/7649 ft TVD
 Csg Hanger: Fluted Mandrel Hanger
 Centralizers: 1 centek centralizer w/ stop collar 10ft above shoe. 1 centek centralizer 10ft above float collar. 1 centek centralizer every joint (floating) until KOP. 1 centek centralizer every 3 joints (floating) until 200ft inside intermediate shoe. 1 centek centralizer 50ft below mandrel hanger.
 Cement: 15 ppg Tail slurry w/ TOC @ 1850'vd
Potential Drilling Problems: Bit Preservation, Hole Cleaning
 Notes / Comments:

Last Revision Date: 8/5/2014
 Revised by: George Manthos

Note: Depths are referenced to RKB
 Note: Not Drawn to Scale

RECEIVED
 Office of Oil and Gas


AUG 13 2014

WV Department of Environmental Protection
 10/17/2014

WW9

GREENDOT UNIT II 6H

PAGE OF

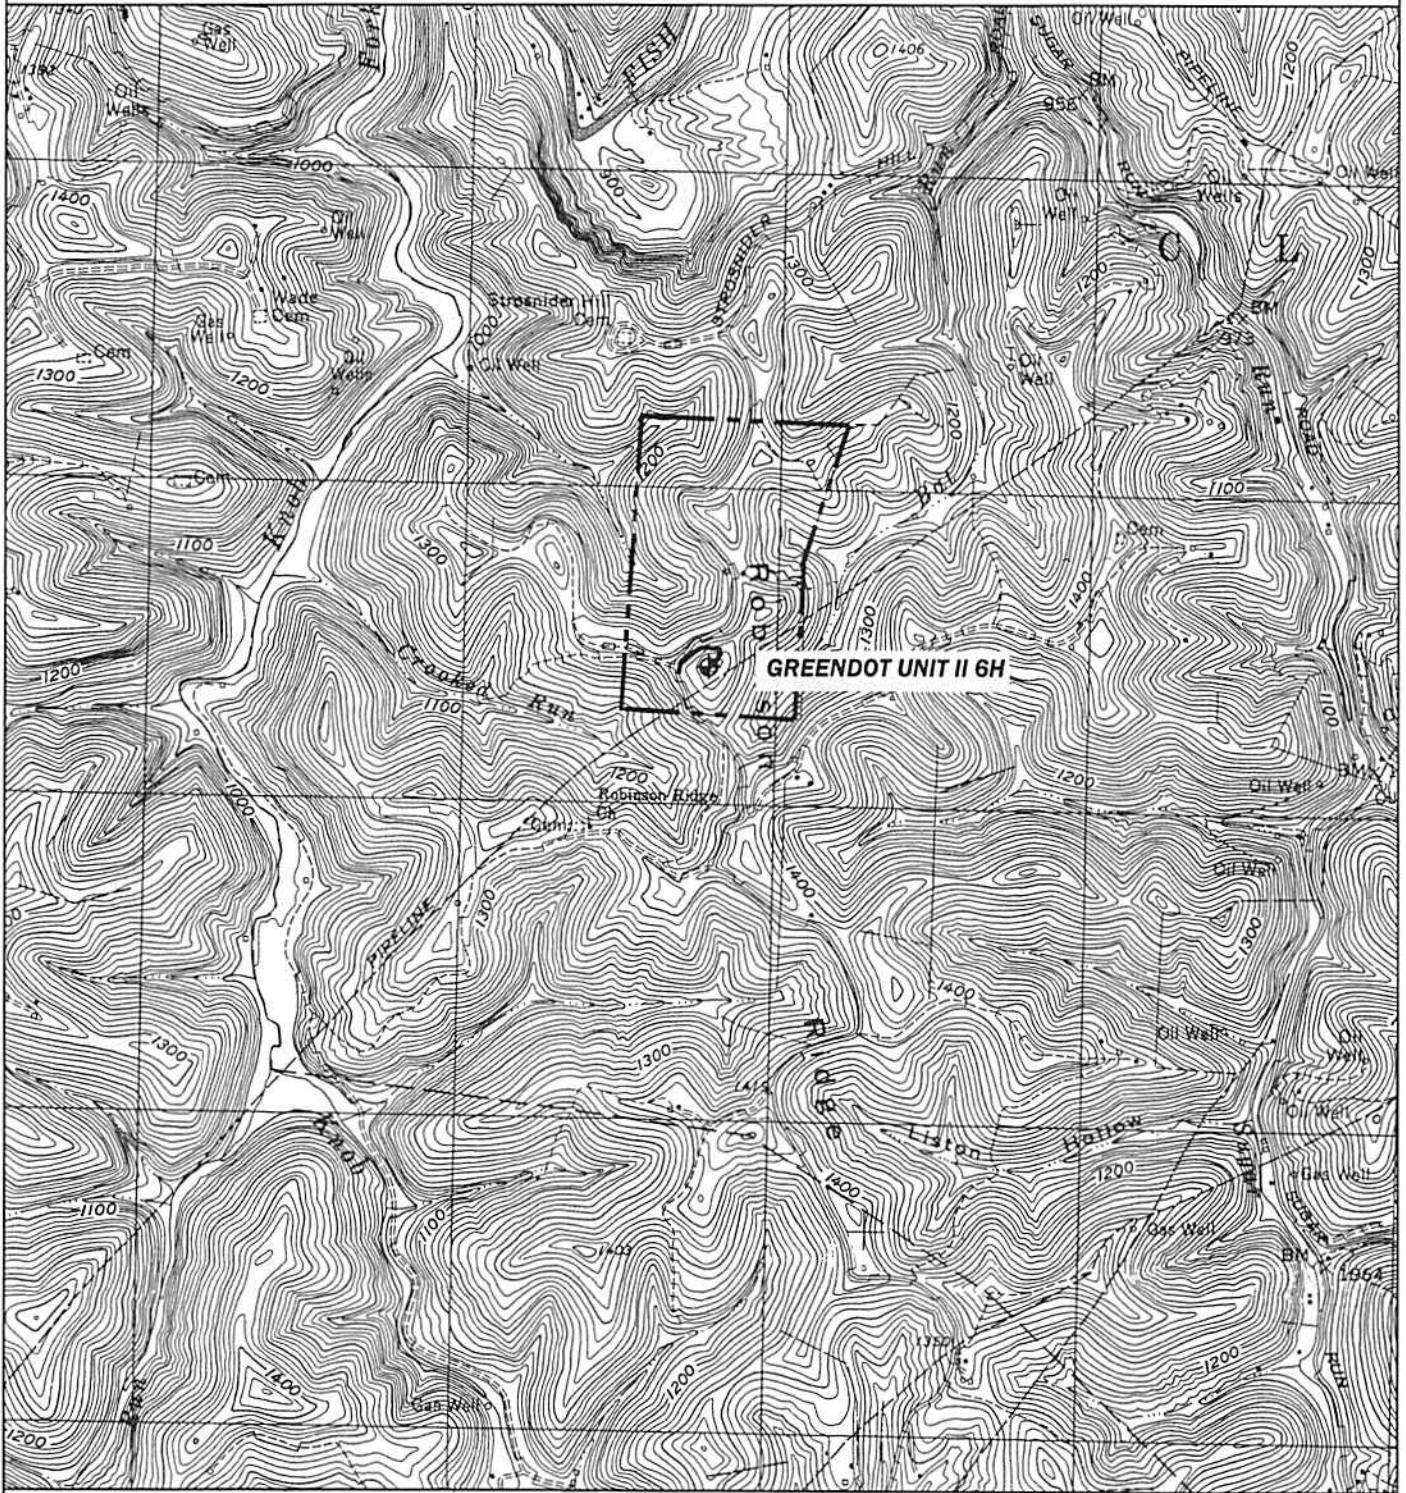

PREPARED BY: <i>Dm4</i> <i>6-14-13</i>	OPERATOR	TOPO SECTION	WELL NAME
ANGLE RIGHT LAND SURVEYING, LLC PO BOX 681 GRANTSVILLE, WV 26147 (304) 354-0085	STATOIL USA ONSHORE PROPERTIES INC. 2103 CITYWEST BLVD., STE. 800 HOUSTON, TX 77042	LITTLETON 7.5' SCALE: 1"=2000'	GREENDOT UNIT II 6H DATE: 04/29/13


G100488

1,620'

LATITUDE 39° 42' 30" GREEN DOT UNIT II 6H

GREENDOT UNIT II 6H MINERAL OWNERSHIP	
UNIT TRACT 7 GREEN DOT FARM, INC., P/O T.M. 03-05-25, 29 & 30, 311.90 ACRES	
UNIT TRACT 10 ACROPOLIS, INC., P/O T.M. 03-06-02 153.50 ACRES	
UNIT TRACT 8 GREEN DOT FARM, INC., OXY USA, INC., BP MINERAL HOLDINGS II LLC, & SOMERSET MINERALS LP, P/O T.M. 03-05-31, 36.0 ACRES	
UNIT TRACT 5 MAXINE HENDERSON, P/O T.M. 01-08-05 1 10.00 ACRES	
UNIT TRACT 2 GREEN DOT FARM, INC., JOSEPH A. & CHRISTOPHER S. GREEN, P/O T.M. 01-06-15, 46.00 ACRES	
UNIT TRACT 1 SARA K. WADE, P/O T.M. 01-05-33 33.00 ACRES	

NO DWELLINGS OR AGRICULTURAL BUILDINGS WITHIN 625' OF CENTER OF PAD. NO WATER WELLS OR DEVELOPED SPRINGS WITHIN 250' OF PROPOSED WELL.

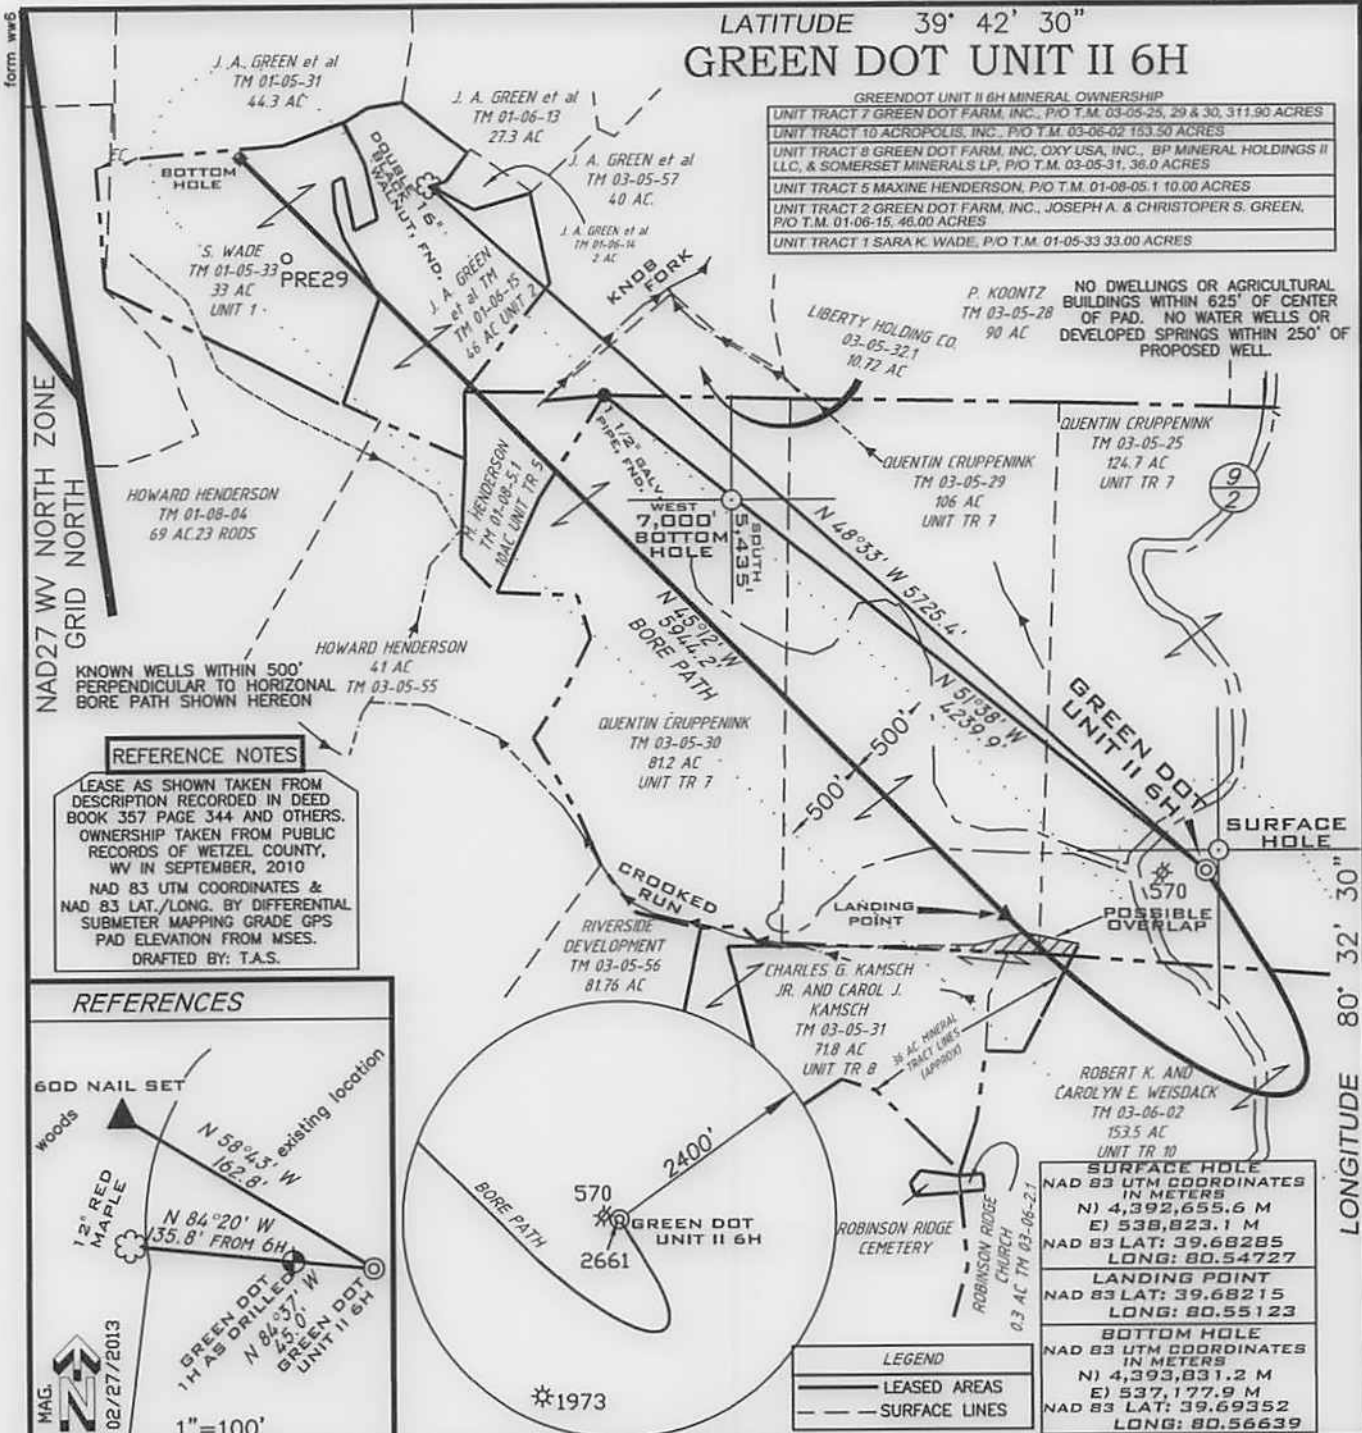

FILE NUMBER G100488(WB9-59)
DRAWING NUMBER G100488_WP_6_REV111213.dwg
SCALE 1" = 1000'
MINIMUM DEGREE OF ACCURACY 1/200
PROVEN SOURCE OF ELEVATION SUB METER MAPPING
GRADE GPS

I THE UNDERSIGNED HEREBY CERTIFY THAT THIS PLAT IS CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF AND SHOWS ALL THE INFORMATION REQUIRED BY LAW AND THE REGULATIONS ISSUED AND PRESCRIBED BY THE DEPARTMENT OF ENVIRONMENTAL PROTECTION

P.S. 1006 *Terry A. Shreve*



STATE OF WEST VIRGINIA
DIVISION OF ENVIRONMENTAL PROTECTION
OFFICE OF OIL AND GAS

REVISED DATE: NOVEMBER 14, 2013
DATE: JULY 8, 2013

WELL TYPE: OIL GAS LIQUID INJECTION WASTE DISPOSAL
(IF "GAS") PRODUCTION STORAGE DEEP SHALLOW

LOCATION ELEVATION 1476' WATERSHED CROOKED RUN AND BAT RUN
DISTRICT CLAY & CENTER COUNTY WETZEL
QUADRANGLE LITTLETON 7.5' LEASE NUMBER _____

SURFACE OWNER QUENTIN CRUPPENINK ACREAGE 124.7±
OIL & GAS ROYALTY OWNER GREEN DOT FARMS, INC. LEASE ACREAGE SEE MINERAL OWNERSHIP TABLE

PROPOSED WORK: DRILL CONVERT DRILL DEEPER REDRILL FRACTURE OR STIMULATE PLUG OFF OLD FORMATION
PERFORATE NEW FORMATION OTHER PHYSICAL CHANGE (SPECIFY) _____

TARGET FORMATION MARCELLUS ESTIMATED DEPTH 7612' + Horizontal Leg

WELL OPERATOR STATOIL USA ONSHORE PROPERTIES INC. DESIGNATED AGENT WILLIAM T. FAHEY II
ADDRESS 2103 CITYWEST BLVD., STE. 800 HOUSTON, TX 77042 ADDRESS FAHEY LAW OFFICE, 2116 PENNSYLVANIA AVE. WEIRTON, WV 26062

10/17/2014

form ww6
NAD27 W NORTH ZONE GRID NORTH
A.R.L.S.

9,326'
LONGITUDE 80° 32' 30"