



west virginia department of environmental protection

Office of Oil and Gas
601 57th Street, S.E.
Charleston, WV 25304
(304) 926-0450
fax: (304) 926-0452

Harold D. Ward, Cabinet Secretary
www.dep.wv.gov

Tuesday, March 9, 2021
WELL WORK PERMIT
Horizontal 6A / New Drill

TUG HILL OPERATING, LLC
380 SOUTHPOINTE BOULEVARD, PLAZA II
SUITE 200
CANONSBURG, PA 15317

Re: Permit approval for VAN WINKLE N-7HM
47-051-02367-00-00

This well work permit is evidence of permission granted to perform the specified well work at the location described on the attached pages and located on the attached plat, subject to the provisions of Chapter 22 of the West Virginia Code of 1931, as amended, and all rules and regulations promulgated thereunder, and to any additional specific conditions and provisions outlined in the pages attached hereto. Notification shall be given by the operator to the Oil and Gas Inspector at least 24 hours prior to the construction of roads, locations, and/or pits for any permitted work. In addition, the well operator shall notify the same inspector 24 hours before any actual well work is commenced and prior to running and cementing casing. Spills or emergency discharges must be promptly reported by the operator to 1-800-642-3074 and to the Oil and Gas Inspector.

Please be advised that form WR-35, Well Operators Report of Well Work is to be submitted to this office within 90 days of completion of permitted well work, as should form WR-34 Discharge Monitoring Report within 30 days of discharge of pits, if applicable. Failure to abide by all statutory and regulatory provisions governing all duties and operations hereunder may result in suspension or revocation of this permit and, in addition, may result in civil and/or criminal penalties being imposed upon the operators.

Per 35 CSR 4-5.2.g this permit will expire in two (2) years from the issue date unless permitted well work is commenced. If there are any questions, please feel free to contact me at (304) 926- 0450.

A blue ink signature of James A. Martin.

James A. Martin
Chief

Operator's Well Number: VAN WINKLE N-7HM
Farm Name: XCL MIDSTREAM OPERATI
U.S. WELL NUMBER: 47-051-02367-00-00
Horizontal 6A New Drill
Date Issued: 3/9/2021

PERMIT CONDITIONS

West Virginia Code § 22-6A-8(d) allows the Office of Oil and Gas to place specific conditions upon this permit. Permit conditions have the same effect as law. Failure to adhere to the specified permit conditions may result in enforcement action.

CONDITIONS

1. This proposed activity may require permit coverage from the United States Army Corps of Engineers (USACE). Through this permit, you are hereby being advised to consult with USACE regarding this proposed activity.
2. If the operator encounters an unanticipated void, or an anticipated void at an unanticipated depth, the operator shall notify the inspector within 24 hours. Modifications to the casing program may be necessary to comply with W. Va. Code § 22-6A-5a (12), which requires drilling to a minimum depth of thirty feet below the bottom of the void, and installing a minimum of twenty (20) feet of casing. Under no circumstance should the operator drill more than one hundred (100) feet below the bottom of the void or install less than twenty (20) feet of casing below the bottom of the void.
3. When compacting fills, each lift before compaction shall not be more than 12 inches in height, and the moisture content of the fill material shall be within limits as determined by the Standard Proctor Density test of the actual soils used in specific engineered fill, ASTM D698, Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort, to achieve 95 % compaction of the optimum density. Each lift shall be tested for compaction, with a minimum of two tests per lift per acre of fill. All test results shall be maintained on site and available for review.
4. Operator shall install signage per § 22-6A-8g (6) (B) at all source water locations included in their approved water management plan within 24 hours of water management plan activation.
5. Oil and gas water supply wells will be registered with the Office of Oil and Gas and all such wells will be constructed and plugged in accordance with the standards of the Bureau for Public Health set forth in its Legislative rule entitled *Water Well Regulations*, 64 C.S.R. 19. Operator is to contact the Bureau of Public Health regarding permit requirements. In lieu of plugging, the operator may transfer the well to the surface owner upon agreement of the parties. All drinking water wells within fifteen hundred feet of the water supply well shall be flow tested by the operator upon request of the drinking well owner prior to operating the water supply well.
6. Pursuant to the requirements pertaining to the sampling of domestic water supply wells/springs the operator shall, no later than thirty (30) days after receipt of analytical data provide a written copy to the Chief and any of the users who may have requested such analyses.
7. 24 hours prior to the initiation of the completion process the operator shall notify the Chief or his designee.
8. During the completion process the operator shall monitor annular pressures and report any anomaly noticed to the chief or his designee immediately.
9. If any explosion or other accident causing loss of life or serious personal injury occurs in or about a well or well work on a well, the well operator or its contractor shall give notice, stating the particulars of the explosion or accident, to the oil and gas inspector and the Chief, within 24 hours of said accident.
10. During the casing and cementing process, in the event cement does not return to the surface, the oil and gas inspector shall be notified within 24 hours.

PERMIT CONDITIONS

11. The operator shall provide to the Office of Oil and Gas the dates of each of the following within 30 days of their occurrence: completion of construction of the well pad, commencement of drilling, cessation of drilling, completion of any other permitted well work, and completion of the well. Such notice shall be provided by sending an email to DEPOOGNotify@wv.gov.



west virginia department of environmental protection

Office of Oil and Gas
601 57th Street, S.E.
Charleston, WV 25304
(304) 926-0450
Fax: (304) 926-0452

Harold D. Ward, Cabinet Secretary
dep.wv.gov

**ORDER
ISSUED UNDER
WEST VIRGINIA CODE, CHAPTER 22, ARTICLE 6A**

TO: Tug Hill Operating, LLC
380 Southpointe Boulevard, Plaza II., Suite 200
Canonsburg, PA 15317

DATE: February 24, 2021
ORDER NO.: 2021-W-1

INTRODUCTION

This Order (hereinafter "Order") is issued by the Office of Oil and Gas (hereinafter "OOG"), by and through its Chief, pursuant to the authority of W. Va. Code §§ 22-1-1, 22-6-1 and 22-6A-1 *et seq.* to Tug Hill Operating, LLC (hereinafter "Tug Hill" or "Operator"), collectively the "Parties."

FINDINGS OF THE CHIEF

In support of this Order, the Chief hereby finds the following:

1. OOG, an office within the West Virginia Department of Environmental Protection, is the agency with the duty and authority to execute and enforce W. Va. Code §22-6-1 and §22-6A-1 *et seq.*, and the rules and regulations promulgated thereunder.
2. Tug Hill is a "person" as defined by W. Va. Code §22-6-1(n), with a corporate address as 380 Southpointe Boulevard, Plaza II., Suite 200, Canonsburg, PA 15317.
3. On December 23, 2020, January 19, 22 and 25, 2021 Tug Hill submitted well work permit applications identified as API#s 47- 51-02347, 47-51-02348, 47-51-02349, 47-51-02350, 47-51-02351, 47-51-02352, 47-51-02353, 47-51-02354, 47-51-02355, 47-51-02356, 47-51-02357, 47-51-02358, 47-51-02359, 47-51-02360, 47-51-02361, 47-51-02362, 47-51-02363, 47-51-02364, 47-51-02365, 47-51-02366, 47-51-02367 and 47-51-02368. The wells are located on the Hunter Pethel Pad in the Meade District of Marshall County, West Virginia.
4. On February 18, 2021 Tug Hill requested a waiver for Wetlands 03, 04, 07 and 08 as outlined in Attachment 1, from well location restriction requirements in W. Va. Code §22-6A-12(b) for the well work permit applications identified as API#s 47- 51-02347, 47-51-02348, 47-51-02349, 47-51-02350, 47-51-02351, 47-51-02352, 47-51-02353, 47-51-02354, 47-51-02355, 47-51-02356, 47-51-02357, 47-51-02358, 47-51-02359, 47-51-02360, 47-51-02361, 47-51-02362, 47-51-02363, 47-51-02364, 47-51-02365, 47-51-02366, 47-51-02367 and 47-51-02368. Wetland 03 will be excluded from the waiver due to their location inside of the construction area and total coverage under the ACOE permit.

CONCLUSIONS OF LAW

1. West Virginia Code §22-1-6(d) requires, in part, that “in addition to other powers, duties and responsibilities granted and assigned to the secretary by this chapter, the secretary is authorized and empowered to... (3) Enter private lands to make surveys and inspections for environmental protection purposes; to investigate for violations of statutes or rules which the Office of Oil and Gas is charged with enforcing; to serve and execute warrants and processes; to make arrests; issue orders, which for the purposes of this chapter include consent agreements; and to otherwise enforce the statutes or rules which the Office of Oil and Gas is charged with enforcing.”
2. West Virginia Code §22-6A-2(a)(6) requires, in part, that “Concomitant with the broad powers to condition the issuance of well work permits, the secretary should also have broad authority to waive certain minimum requirements of this article when, in his or her discretion, such waiver is appropriate: *Provided*, That the secretary shall submit a written report of the number of waivers granted to the Legislature commencing January 1, 2013, and each year thereafter.”
3. West Virginia Code §22-6A-12(b) requires, in part, that “no well pad may be prepared or well drilled within one hundred feet measured horizontally from any perennial stream, natural or artificial lake, pond or reservoir, or a wetland, or within three hundred feet of a naturally reproducing trout stream. No well pad may be located within one thousand feet of a surface or ground water intake of a public water supply. The distance from the public water supply as identified by the Office of Oil and Gas shall be measured as follows: (1) For a surface water intake on a lake or reservoir, the distance shall be measured from the boundary of the lake or reservoir. (2) For a surface water intake on a flowing stream, the distance shall be measured from a semicircular radius extending upstream of the surface water intake. (3) For a groundwater source, the distance shall be measured from the wellhead or spring. The Office of Oil and Gas may, in its discretion, waive these distance restrictions upon submission of a plan identifying sufficient measures, facilities or practices to be employed during well site construction, drilling and operations to protect the waters of the state. A waiver, if granted, shall impose any permit conditions as the secretary considers necessary.”

ORDER

West Virginia Code §22-6A-12(b) requires, in part, that “no well pad may be prepared or well drilled within one hundred feet measured horizontally from any perennial stream, natural or artificial lake, pond or reservoir, or a wetland. The Office of Oil and Gas grants the request for a waiver for Wetlands 04, 07 and 08 from well location restriction requirements in W. Va. Code §22-6A-12(b) for the well work permit applications identified as API#s 47- 51-02347, 47-51-02348, 47-51-02349, 47-51-02350, 47-51-02351, 47-51-02352, 47-51-02353, 47-51-02354, 47-51-02355, 47-51-02356, 47-51-02357, 47-51-02358, 47-51-02359, 47-51-02360, 47-51-02361, 47-51-02362, 47-51-02363, 47-51-02364, 47-51-02365, 47-51-02366, 47-51-02367 and 47-51-02368. The Office of Oil and Gas hereby **ORDERS** that Tug Hill shall meet the following site construction and operational requirements for the Hunter Pethtel Well Pad:

- a. A berm shall be constructed around the perimeter of the pad to contain any potential spills and storm water runoff. Berm is to be at least twenty-four inches (24”) in height;
- b. Erosion control blankets shall be installed on all slopes and down gradient locations of the pad as erosion and sediment controlling BMPs;
- c. Wetlands 04 and 08 shall be protected by a layer of both Super Silt Fence and twenty four inch (24”) compost filter sock. This along with temporary and permanent vegetative cover will prevent sediment from reaching the wetlands;
- d. Disturbed areas not used for operations shall be seeded and mulched per the seeding tables in the WVDEP-OOG Erosion and Sediment Control Manual;
- e. Drill cuttings and associated drilling mud shall be disposed of in a permitted landfill;
- f. Waste generated by the flowback treatment systems shall be sent to offsite disposal at a permitted landfill;
- g. Weekly site inspections shall be conducted to monitor and maintain the integrity of the BMP storm water controls;
- h. Weekly storm water and spill prevention inspections shall be conducted focusing on storm water and spill prevention BMPs and maintenance of these BMPs;
- i. Inspections of the storm water and spill prevention measures shall be conducted after any major storm event defined as a half inch (½”) rain within any twenty-four (24) hour period;
- j. Pad inspections shall be conducted no less than once a week to identify and mitigate potential deficiencies;
- k. All records from inspections shall be maintained on site for the life of the project and be available upon request.

Thus ORDERED, the 24th day of February, 2021.

IN THE NAME OF THE STATE OF WEST VIRGINIA:

OFFICE OF OIL AND GAS
DEPARTMENT OF ENVIRONMENTAL PROTECTION
STATE OF WEST VIRGINIA

By: **James Martin** Digitally signed by James Martin
Date: 2021.02.24 13:14:36 -05'00'

JAMES A. MARTIN, CHIEF

4705102367

WW-6B
(04/15)

API NO. 47-051
OPERATOR WELL NO. Van Winkle N-7HM
Well Pad Name: Hunter Pethtel

STATE OF WEST VIRGINIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS
WELL WORK PERMIT APPLICATION

1) Well Operator: Tug Hill Operating, LLC 494510851 Marshall Meade Glen Easton 7.5'
Operator ID County District Quadrangle

2) Operator's Well Number: Van Winkle N-7HM Well Pad Name: Hunter Pethtel

3) Farm Name/Surface Owner: XcL Midstream Operating, LLC Public Road Access: County Route 74

4) Elevation, current ground: 754' Elevation, proposed post-construction: 754'

5) Well Type (a) Gas Oil Underground Storage
Other

(b) If Gas Shallow Deep
Horizontal

6) Existing Pad: Yes or No Yes

7) Proposed Target Formation(s), Depth(s), Anticipated Thickness and Expected Pressure(s): *Bary Shale 1-2-21*
Marcellus is the target formation at a depth of 6147' - 6197', thickness of 50' and anticipated pressure of approx. 3800 psi.

8) Proposed Total Vertical Depth: 6,297'

9) Formation at Total Vertical Depth: Onondaga

10) Proposed Total Measured Depth: 13,697'

11) Proposed Horizontal Leg Length: 7,082.03'

12) Approximate Fresh Water Strata Depths: 70; 415'

13) Method to Determine Fresh Water Depths: Offset well reports or noticeable flow at the flowline or when need to start soaping

14) Approximate Saltwater Depths: 870'

15) Approximate Coal Seam Depths: Sewickley Coal - 314' and Pittsburgh Coal - 409'

16) Approximate Depth to Possible Void (coal mine, karst, other): None anticipated

17) Does Proposed well location contain coal seams directly overlying or adjacent to an active mine? Yes No

(a) If Yes, provide Mine Info: Name: _____
Depth: _____
Seam: _____
Owner: _____

RECEIVED
Office of Oil and Gas
FEB 03 2021
WV Department of
Environmental Protection

4705102367

WW-6B
(04/15)

API NO. 47-051 -
OPERATOR WELL NO. Van Winkle N-7HM
Well Pad Name: Hunter Pethel

18)

CASING AND TUBING PROGRAM

TYPE	Size (in)	New or Used	Grade	Weight per ft. (lb/ft)	FOOTAGE: For Drilling (ft)	INTERVALS: Left in Well (ft)	CEMENT: Fill-up (Cu. Ft.)/CTS
Conductor	30"	NEW	BW	BW	120'	120'	259ft^3(CTS)
Fresh Water	13 3/8"	NEW	J55	54.5#	515'	515'	708ft^3(CTS)
Coal	13 3/8"	NEW	J55	54.5#	515'	515'	708ft^3(CTS)
Intermediate	9 5/8"	NEW	J55	36#	2,230'	2,230'	724ft^3(CTS)
Production	5 1/2"	NEW	P110	20#	13,697'	13,697'	3501ft^3(CTS)
Tubing	2 3/8"	NEW	N80	4.7#		6,015'	
Liners							

Baug Stiller 1-20-21

TYPE	Size (in)	Wellbore Diameter (in)	Wall Thickness (in)	Burst Pressure (psi)	Anticipated Max. Internal Pressure (psi)	Cement Type	Cement Yield (cu. ft./k)
Conductor	30"	36"	1.0	2,333	1,866	CLASS A	1.2
Fresh Water	13 3/8"	17 1/2"	.38	2,740	2,192	SEE #24	1.2
Coal	13 3/8"	17 1/2"	.38	2,740	2,192	SEE #24	1.2
Intermediate	9 5/8"	12 1/4"	.352	3,520	2,816	SEE #24	1.19
Production	5 1/2"	8 7/8" _ 8 3/4"	.361	12,640	10,112	SEE #24	1.17/1.19
Tubing	2 3/8"		.19	11,200	8,960		
Liners							

PACKERS

Kind:	N/A			
Sizes:	N/A			
Depths Set:	N/A			

RECEIVED
Office of Oil and Gas
FEB 03 2021

WV Department of
Environmental Protection

WW-6B
(10/14)

4705102367
API NO. 47-051 -
OPERATOR WELL NO. Van Winkle N-7HM
Well Pad Name: Hunter Pethel

19) Describe proposed well work, including the drilling and plugging back of any pilot hole:

Drill through the Marcellus and TD Pilot Hole 100' into the Onondaga. Log vertical section and run a solid cement plug back to proposed KOP. Drill curve and lateral per proposed well plan, run and cement production casing. Perform CBL from 60 deg to surface, make cleanout run, and stimulate.

20) Describe fracturing/stimulating methods in detail, including anticipated max pressure and max rate:

Well to be completed with approximately 17,750,000 lb proppant and 320,000 bbl of water. Max rate = 80 bpm; max psi = 9,000#.

Bruce Hillis 1-20-21

21) Total Area to be disturbed, including roads, stockpile area, pits, etc., (acres): 16.63 acres

22) Area to be disturbed for well pad only, less access road (acres): 4.87 acres

23) Describe centralizer placement for each casing string:

Will run 3 centralizers on surface casing at equal distance. Intermediate will have 1 centralizer every other joint. Production casing will have one centralizer every other joint in lateral, one centralizer every joint through curve, one centralizer every other joint to surface.

24) Describe all cement additives associated with each cement type:

Sfc - Premium NE-1 + 2% CaCl; Int1 - Premium NE-1 + 1.5% CaCL + Flake; Int2 - Lead: Premium NE-1 + 5% BA-90 + .85% R-3 + 3% KCl + .75 gals/100sk FP-13L + 1% MPA-170 Tail: Premium NE-1 + .1% R-3 + 5% KCl + 1% CD-32 + .4% FL-52 + .2% ASA-301 + .6% Sodium Metasilicate; Kick Plug - Class H Cement + 1% CD-32 + .7% Sodium Metasilicate + .1% R-3 + .75 gal/100sk FP-13L; Prod - Lead: 50:50 (Poz:Class H) + .3% R-3 + .3% MPA-250 + .75 gal/100sk FP-13L Tail: 25:75 (Poz:Class H) + .3% R-3 + .3% MPA-250 + .375 gal/100sk FP-13L

25) Proposed borehole conditioning procedures:

Will circulate a minimum of 3 hours at TD, short trip to curve, circulate bottoms up, check for flow, POOH

RECEIVED
Office of Oil and Gas
FEB 03 2021
WV Department of
Environmental Protection

*Note: Attach additional sheets as needed.




WELL NAME: Van Winkle N-7HM
STATE: WV **COUNTY:** Marshall
DISTRICT: Meade
DF Elev: 754' **GL Elev:** 754'
TD: 13,697'
TH Latitude: 39.781936
TH Longitude: -80.726195
BH Latitude: 39.800551
BH Longitude: -80.736821

FORMATION TOPS	
Formation	Depth TVD
Deepest Fresh Water	415
Sewickley Coal	314
Pittsburgh Coal	409
Big Lime	1634
Weir	1926
Berea	2125
Gordon	2395
Rhinestreet	5512
Genesee/Burkett	6017
Tully	6044
Hamilton	6079
Marcellus	6147
Landing Depth	6182
Onondaga	6197
Pilot Hole Depth	6297

CASING SUMMARY							
Type	Hole Size (in)	Csg Size (in)	Depth (MD)	Depth (TVD)	Weight (lb/ft)	Grade	Top of Cement
Conductor	36	30	120'	120'	BW	BW	Surface
Surface	17.5	13 3/8	515'	515'	54.5	J55	Surface
Intermediate 1	12 1/4	9 5/8	2,230'	2,225'	36	J55	Surface
Production	8 7/8 x 8 3/4	5 1/2	13,697'	6,059'	20	CYHP110	Surface

	CEMENT SUMMARY			DRILLING DETAILS	
	Sacks	Class	Density	Fluid Type	Centralizer Notes
Conductor	338	A	15.6	Air	None
Surface	687	A	15.6	Air	3 Centralizers at equal distance
Intermediate 1	758	A	15	Air	1 Centralizer every other jt
Production	3,214	A	14.5	Air / SOBMs	1 every other joint in lateral; 1 per joint in curve; 1 every other jt to sfc

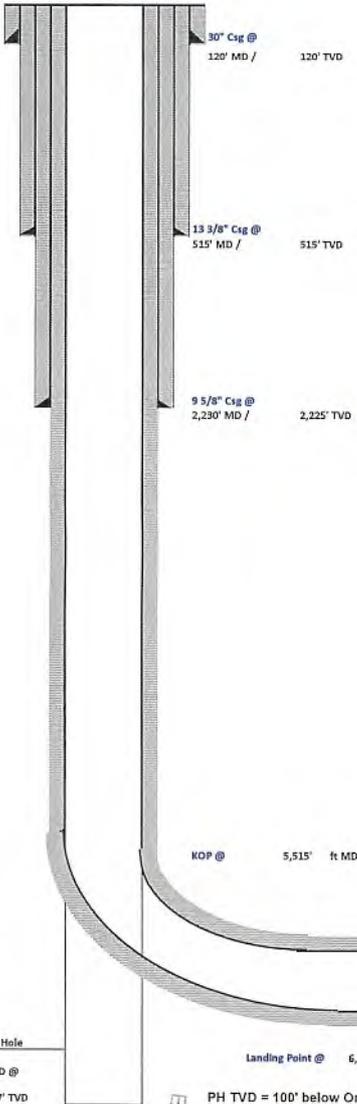

Barry Stehly 1-20-21

WV Department of
 Environmental Protection
RECEIVED
 Office of Oil and Gas
FEB 03 2021
 PH TVD = 100' below Onondaga Top

4705102367



Tug Hill Operating, LLC Casing and Cement Program

Van Winkle N-7HM

Casing

	String	Grade	Bit Size	Depth (Measured)	Cement Fill Up
Conductor	30"	BW	36"	120'	CTS
Surface	13 3/8"	J55	17 1/2"	515'	CTS
Intermediate	9 5/8"	J55	12 1/4"	2,230'	CTS
Production	5 1/2"	CYHP110	8 7/8 x 8 3/4"	13,697'	CTS

Cement

Conductor: Premium NE-1 + 2% bwoc CaC12 + 46.5% Fresh Water – Conductor Cement mixed at 15.6 ppg, Y=1.2

Surface: Premium NE-1 + 2% bwoc CaC12 + 46.5% Fresh Water – Surface Cement mixed at 15.6 ppg, Y=1.2

Intermediate: Premium NE-1 + 1% bwoc CaC12 + 46.5% Fresh Water – Intermediate Cement mixed at 15.6 ppg, Y=1.19

Kick Off Plug: Class H Cement + 1% CD-32 + .7% Sodium Metasilicate + .1% R-3 + .75 gal/100sk FP-13L - KOP Plug

Production: 50:50 Poz: Premium NE-1 + .1% bwoc ASA-301 + 60lb/sk ASCA-1 + .35% bwoc BA-10A + .25% bwoc MPA-170, 44 lb sack + .5% bwoc R-3 + .75 gals/100sk FP-13L – Production Cement mixed at 15.2ppg, Y = 1.19

RECEIVED
Office of Oil and Gas
JAN 25 2021
WV Department of
Environmental Protection

03/12/2021

Area of Review**Sources of information to Support 35CSR8 - 5.11: 9.3 et seq.**

Description of process to identify potential pathways for well communication during hydraulic fracturing activities.

Data Sources Reviewed:

1. IHS Well Data service: Public nationwide data service that pulls directly from State agency Oil and Gas databases
2. Farm Maps
3. Topo Maps: Recent and older (contact WVGES)
4. Check with DPS

Contacted Adam Picard 724-485-9331, apicard@dpslandservices.com, DPS GIS (12/04/2020) to have him make maps of the wellbores with his information. DPS utilizes WVGES maps for their mapping seems it as the best publicly available. See attached map he provided.

Request maps for:

1. Wellbore with IHS All Wells Layer
2. Map with Farm lines overlain and any well spots identified on Farm Maps
3. More recent (1970s vintage) topos and older topos

Discussion with Phil Dinterman WVGES GIS Department (7/15/2016)

- WVGES has plotted every well spot they have access to and are aware of with that contains a coordinate. 30000, 70000, and 90000 series wells are available via the WVGES online map. Some locations aren't great due to vintage and manipulation of maps through time
- 30000 series – any well drilled prior to 1929 – APIs were not assigned to original wells
- 70000 series – Well spots pulled from old Farm line maps that the WVGES has access to
- 90000 series – Any sources that the WVGES has access that shows a well spot but has no additional supporting information. DEP does not have 90000 series on their maps.
- There can be duplication between wells in the 3 series
- Phil indicated that other Operators are providing a screenshot of the WVGES map with their planned well and using that for permits

RECEIVED
Office of Oil and Gas

JAN 25 2021

WV Department of
Environmental Protection

Page 1 of 4

03/12/2021

4705102367

Permit well - Van Winkle N-7HM

Wells within 500' Buffer

Note: Well spots depicted on Area of Review map are derived from State held coordinates. The spots may differ from those depicted on the Well Plat because the Plat locations represent actual field surveyed locations. Please refer to the Plat for surveyed well spots.

API Number	Operator Name	Total Depth	Perforated Fms	Producing zones not perforated	Is this well "known or reasonably expected to penetrate a depth that could be within the range of Fracture propagation"? 1000' is max limit I would assign to wells that might be within in range of fracture propagation	Comments
4705101330	Tug Hill Operating	10154' MD, 6151' TVD	Marcellus	Unknown	Yes, existing Marcellus producer. Proper casing and cement should prevent migration of fluids from new wellbore to existing wellbore.	Producing Marcellus horizontal well. Tug Hill Operating is considering plugging this well.
4705101284	Tug Hill Operating	6340' TVD	None	None	Yes, existing vertical pilot drilled into Onondaga. Well was not perforated. Proper casing and cement should prevent migration of fluids from new wellbore to existing wellbore.	Well is not producing.
4705101859	EQT Production Company	No Depth/Not Drilled	None	None	No, well is a proposed well. The well was not drilled. This is a canceled permit.	A canceled permit.
4705101860	EQT Production Company	No Depth/Not Drilled	None	None	No, well is a proposed well. The well was not drilled. This is a canceled permit.	A canceled permit.
4705101866	EQT Production Company	No Depth/Not Drilled	None	None	No, well is a proposed well. The well was not drilled. This is a canceled permit.	A canceled permit.
4705101846	EQT Production Company	No Depth/Not Drilled	None	None	No, well is a proposed well. The well was not drilled. This is a canceled permit.	A canceled permit.
4705101847	EQT Production Company	No Depth/Not Drilled	None	None	No, well is a proposed well. The well was not drilled. This is a canceled permit.	A canceled permit.
4705130296	Unknown	Unknown	Unknown	Unknown	Unknown but unlikely. The well likely represents an old shallow well that is too shallow to be effected by fracturing in the planned Marcellus well. Well is plugged.	Well was plugged 8/30/1949.

RECEIVED
Office of Oil and Gas
JAN 25 2021
WV Department of
Environment and Natural Resources
03/12/2021

Location Information: View Map

Table with columns: API, COUNTY, PERMIT, TAX_DISTRICT, QUAD_75, QUAD_15, LAT_DD, LON_DD, UTM_E, UTM_N

There is no Bottom Hole Location data for this well

Owner Information:

Table with columns: API, CMP_DT, SUFFIX, STATUS, SURFACE_OWNER, WELL_NUM, CO_NUM, LEASE, LEASE_NUM, MINERAL_OWN, OPERATOR, AT_COMPLETION, PROP_VO, PROP_TRGT_FM, TFM_EST_PR

Completion Information:

Table with columns: API, CMP_DT, SUFFIX, ELEV DATUM, FIELD, DEEPEST_FM, DEEPEST_FMT, INITIAL_CLASS, FINAL_CLASS, TYPE, RIG, CMP_MTHO, TVD, TMD, TND, VTD, KOD, G_BEF, G_AFT, O_BEF, O_AFT, NGL_BEF, NGL_AFT, P_BEF, T_BEF, P_AFT, T_AFT, BH_P_BEF, BH_P_AFT, G_MSRD_BY

Pay/Show/Water Information:

Table with columns: API, CMP_DT, ACTIVITY, PRODUCT, SECTION, DEPTH_TOP, FM_TOP, DEPTH_BOT, FM_BOT, G_BEF, G_AFT, O_BEF, O_AFT, WATER_QNTY

Production Gas Information: (Volumes in Mcf)

Table with columns: API, PRODUCING_OPERATOR, PRD_YEAR, ANN_GAS, JAN, FEB, MAR, APR, MAY, JUN, JUL, AUG, SEP, OCT, NOV, DCM

Production Oil Information: (Volumes in Bbl) ** some operators may have reported NGL under Oil

Table with columns: API, PRODUCING_OPERATOR, PRD_YEAR, ANN_OIL, JAN, FEB, MAR, APR, MAY, JUN, JUL, AUG, SEP, OCT, NOV, DCM

Production NGL Information: (Volumes in Bbl) ** some operators may have reported NGL under Oil

Table with columns: API, PRODUCING_OPERATOR, PRD_YEAR, ANN_NGL, JAN, FEB, MAR, APR, MAY, JUN, JUL, AUG, SEP, OCT, NOV, DCM

Production Water Information: (Volumes in Gallons)

Table with columns: API, PRODUCING_OPERATOR, PRD_YEAR, ANN_WTR, JAN, FEB, MAR, APR, MAY, JUN, JUL, AUG, SEP, OCT, NOV, DCM

Stratigraphy Information:

Table with columns: API, SUFFIX, FM, FM_QUALITY, DEPTH_TOP, DEPTH_QUALITY, THICKNESS, THICKNESS_QUALITY, ELEV DATUM

Wireline (E-Log) Information:

Table with columns: API, LOG_TOP, LOG_BOT, DEEPEST_FML, LOGS_AVAIL, SCAN, DIGITIZED, GR_TOP, GR_BOT, D_TOP, D_BOT, N_TOP, N_BOT, I_TOP, I_BOT, T_TOP, T_BOT, S_TOP, S_BOT, O_TOP, O_BOT, INCH2, INCHS, REDUCED, KOP, LOGMD, ELEV_KB, ELEV_GL, ELEV_DF, LOG_MSRD_FROM

Comment: *logs: caliper, ps, tension, ft, amplitude, ccd, vdi, bit size.

Downloadable Log Images: We advise you to save the log image file to your PC for viewing. To do so, right-click the .tif image of interest and select the save option. Then you can direct the file to a location of your choice. Please note these images vary in size and some may take several minutes to download, especially if using a 56k or slower dialup connection.

Quick Reference Guide for Log File Names: For more info about WVGES scanned logs click here

photologic log types:

d density (includes bulk density, compensated density, density, density porosity, grain density, matrix density, etc.)

e photoelectric absorption (PE or Pe, etc.)

g gamma ray

i induction (includes dual induction, medium induction, deep induction, etc.)

l laterolog

m dipmeter

n neutron (includes neutron porosity, sidereal neutron-SWN, etc.)

o shear

s sonic or velocity

t temperature (includes borehole temperature, BHT, differential temperature, etc.)

z spontaneous potential or potential

mechanical log types:

b cement bond

c caliper

e shear

p perforation depth control or perforator

*other logs may include, but are not limited to, such curves as audio, bit size, CCL-casing collar locator, continuous meter, directional survey, gas detector, guard, NCTL-nuclear Cement Top Locator, radioactive tracer, tension

There is no Plugging data for this well

There is no Sample data for this well

WV Department of Environmental Protection RECEIVED OFFICE OF OIL AND GAS JAN 25 2021

4705102367

Location Information: View Map

Table with columns: API, COUNTY, PERMIT, TAX, DISTRICT, QUAD, QUAD_16, LAT, DD, LON, DD, UTM, UTMN

Bottom Hole Location Information:

Table with columns: API, EP, FLAG, UTM, UTMN, LON, DD, LAT, DD

Owner Information:

Table with columns: API, CMP, DT, SUFFIX, STATUS, SURFACE_OWNER, WELL_NUM, CO_NUM, LEASE, LEASE_NUM, MINERAL_OWN, OPERATOR_AT_COMPLETION, PROP_VD, PROP_TRGT_FM, TFM_EST_PR

Completion Information:

Table with columns: API, CMP, DT, SPUD_DT, ELEV, DATUM, FIELD, DEEPEST_FM, DEEPEST_FMI, INITIAL_CLASS, FINAL_CLASS, TYPE, RIG, CMP_MTHD, TVD, TMD, NEW_FTG, KOD, G_BEF, G_AFT, O_BEF, O_AFT, NGL_BEF, NGL_AFT, P_BEF, T_BEF, P_AFT, T_AFT, BH_P_BEF, BH_P_AFT, G_MSRO_BY

Pay/Show Water Information:

Table with columns: API, CMP, DT, ACTIVITY, PRODUCT, SECTION, DEPTH_TOP, FM_TOP, DEPTH_BOT, FM_BOT, G_BEF, G_AFT, O_BEF, O_AFT, WATER_ONTY

Production Gas Information: (Volumes in Mcf)

Table with columns: API, PRODUCING_OPERATOR, PRD_YEAR, ANN_GAS, JAN, FEB, MAR, APR, MAY, JUN, JUL, AUG, SEP, OCT, NOV, DCM

Production Oil Information: (Volumes in Bbl) ** some operators may have reported NGL under Oil

Table with columns: API, PRODUCING_OPERATOR, PRD_YEAR, ANN_OIL, JAN, FEB, MAR, APR, MAY, JUN, JUL, AUG, SEP, OCT, NOV, DCM

Production NGL Information: (Volumes in Bbl) ** some operators may have reported NGL under Oil

Table with columns: API, PRODUCING_OPERATOR, PRD_YEAR, ANN_NGL, JAN, FEB, MAR, APR, MAY, JUN, JUL, AUG, SEP, OCT, NOV, DCM

Production Water Information: (Volumes in Gallons)

Table with columns: API, PRODUCING_OPERATOR, PRD_YEAR, ANN_WTR, JAN, FEB, MAR, APR, MAY, JUN, JUL, AUG, SEP, OCT, NOV, DCM

Stratigraphy Information:

Table with columns: API, SUFFIX, FM, FM_QUALITY, DEPTH_TOP, DEPTH_QUALITY, THICKNESS, THICKNESS_QUALITY, ELEV, DATUM

Wireline (E-Log) Information:

Table with columns: API, LOG_TOP, LOG_BOT, DEEPEST_FML, LOGS_AVAIL, SCAN, DIGITIZED, GR_TOP, GR_BOT, D_TOP, D_BOT, N_TOP, N_BOT, L_TOP, L_BOT, T_TOP, T_BOT, S_TOP, S_BOT, D_TOP, O_BOT, INCH2, INCH5, REDUCED, KOP, LOGMD, ELEV_KB, ELEV_GL, ELEV_DF, LOG_MSRO_FROM

Comment: *logs: ROP tool temp

Downloadable Log Images: We advise you to save the log image file to your PC for viewing. To do so, right-click the .tif image of interest and select the save option.

Table with columns: FILENAME

- Quick Reference Guide for Log File Names
geologic log types:
d density (includes bulk density, compensated density, density, density porosity, grain density, matrix density, etc.)
e photoelectric adsorption (PE or Pa, etc.)
g gamma ray
i induction (includes dual induction, medium induction, deep induction, etc.)
l laterolog
m dipmeter
n neutron (includes neutron porosity, sidewall neutron--SWNL, etc.)
o other
s sonic or velocity
t temperature (includes borehole temperature, EHT, differential temperature, etc.)
z spontaneous potential or potential
mechanical log types:
b cement bond
c caliper
o other
p perforation depth control or perforate

Other logs may include, but are not limited to, such curves as audio bit size, CCL-casing collar locator, continuous meter directional survey, gas detector, guard, NCTL-Nuclear Content Top Locator, radioactive tracer, tension

There is no Plugging data for this well

There is no Sample data for this well

WV Department of Environmental Protection
RECEIVED
Office of Oil and Gas
JAN 25 2021

4705102367

Location Information: View Map

LPI	COUNTY	PERMIT	TAX_DISTRICT	QUAD_76	QUAD_16	LAT_DD	LON_DD	UTME	UTMN
1705101846	Marshall	1846	Meade	Glen Easton	Cameron	39.781827	-80.726602	523411.3	4403578.3

Bottom Hole Location Information:

LPI	EP_FLAG	UTME	UTMN	LON_DD	LAT_DD
1705101846	1	As Proposed	521873.8	4404978.5	-80.743342

Owner Information:

LPI	CMP_DT	SUFFIX	STATUS	SURFACE_OWNER	WELL_NUM	CO_NUM	LEASE	LEASE_NUM	MINERAL_OWN	OPERATOR_AT_COMPLETION	PROP_VD	PROP_TRGT_FM	TFM_EST_PR
1705101846	--	Dvld Orgnl Loc	Cancelled	Dennis W Hunter	9H		Hunter Pethtel		Dennis W Hunter et al	Stone Energy Corporation		6140	Marcellus Fm

Completion Information:

LPI	CMP_DT	SPUD_DT	ELEV	DATUM	FIELD	DEEPEST_FM	DEEPEST_FMT	INITIAL_CLASS	FINAL_CLASS	TYPE	RIG	CMP_MTHD	TVD	TMD	NEW_FTG	KOD	G_BEF	G_AFT	O_BEF	O_AFT	NGL_BEF	NGL_AFT	P_BEF	TI_BEF	P_AFT	TI_AFT	BH_P_BEF	BH_P_AFT	G_MSRD_BY
1705101846	--	--	755	Ground Level																									

There is no Pay data for this well

Production Gas Information: (Volumes in Mcf)

LPI	PRODUCING_OPERATOR	PRD_YEAR	ANN_GAS	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DCM
1705101846	EQT Production Company	2018	0	0	0	0	0	0	0	0	0	0	0	0	0

Production Oil Information: (Volumes in Bbl) ** some operators may have reported NGL under Oil

LPI	PRODUCING_OPERATOR	PRD_YEAR	ANN_OIL	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DCM
1705101846	EQT Production Company	2018	0	0	0	0	0	0	0	0	0	0	0	0	0

Production NGL Information: (Volumes in Bbl) ** some operators may have reported NGL under Oil

LPI	PRODUCING_OPERATOR	PRD_YEAR	ANN_NGL	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DCM
1705101846	EQT Production Company	2018	0	0	0	0	0	0	0	0	0	0	0	0	0

Production Water Information: (Volumes in Gallons)

LPI	PRODUCING_OPERATOR	PRD_YEAR	ANN_WTR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DCM
1705101846	EQT Production Company	2018	0	0	0	0	0	0	0	0	0	0	0	0	0

There is no Stratigraphy data for this well

There is no Wireline (E-Log) data for this well

There is no Plugging data for this well

There is no Sample data for this well

RECEIVED
 Office of Oil and Gas
 JAN 25 2021
 WV Department of
 Environmental Protection

4705102367

Location Information: [View Map](#)

LPI	COUNTY	PERMIT	TAX_DISTRICT	QUAD_76	QUAD_16	LAT_DD	LON_DD	UTME	UTMN
1705101847	Marshall	1847	Meade	Glen Easton	Cameron	39.781755	-80.72847	523422.8	4403570.4

Bottom Hole Location Information:

LPI	EP_FLAG	UTME	UTMN	LON_DD	LAT_DD
1705101847	1	As Proposed	523970	4401941.7	-80.720137

Owner Information:

LPI	CMP_DT	SUFFIX	STATUS	SURFACE_OWNER	WELL_NUM	CO_NUM	LEASE	LEASE_NUM	MINERAL_OWN	OPERATOR_AT_COMPLETION	PROP_VD	PROP_TRGT_FM	TFM_EST_PR
1705101847	--	Divd Orig/Loc	Cancelled	Dennis W Hunter	4H		Hunter Pethtel		Dennis W Hunter et al	Stone Energy Corporation		6250	Marcellus Fm

Completion Information:

LPI	CMP_DT	SPUD_DT	ELEV	DATUM	FIELD	DEEPEST_FM	DEEPEST_FMT	INITIAL_CLASS	FINAL_CLASS	TYPE	RIG	CMP_MTHD	TVD	TMD	NEW_FTG	KOD	G_BEV	G_AFT	O_BEV	O_AFT	NGL_BEV	NGL_AFT	P_BEV	TL_BEV	P_AFT	TL_AFT	BH_P_BEV	BH_P_AFT	G_MSRD_BY
1705101847	--	--	755	Ground Level																									

There is no Pay data for this well

Production Gas Information: (Volumes in Mcf)

LPI	PRODUCING_OPERATOR	PRD_YEAR	ANN_GAS	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DCM
1705101847	EQT Production Company	2018	0	0	0	0	0	0	0	0	0	0	0	0	0

Production Oil Information: (Volumes in Bbl) ** some operators may have reported NGL under Oil

LPI	PRODUCING_OPERATOR	PRD_YEAR	ANN_OIL	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DCM
1705101847	EQT Production Company	2018	0	0	0	0	0	0	0	0	0	0	0	0	0

Production NGL Information: (Volumes in Bbl) ** some operators may have reported NGL under Oil

LPI	PRODUCING_OPERATOR	PRD_YEAR	ANN_NGL	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DCM
1705101847	EQT Production Company	2018	0	0	0	0	0	0	0	0	0	0	0	0	0

Production Water Information: (Volumes in Gallons)

LPI	PRODUCING_OPERATOR	PRD_YEAR	ANN_WTR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DCM
1705101847	EQT Production Company	2018	0	0	0	0	0	0	0	0	0	0	0	0	0

There is no Stratigraphy data for this well

There is no Wireline (E-Log) data for this well

There is no Plugging data for this well

There is no Sample data for this well

RECEIVED
 Office of Oil and Gas
 JAN 25 2021
 WV Department of
 Environmental Protection

4705102367

Location Information: [View Map](#)

LPI	COUNTY	PERMIT	TAX_DISTRICT	QUAD_76	QUAD_16	LAT_DD	LONG_DD	UTME	UTMN
705101859	Marshall	1859	Mezde	Glen Easton	Cameron	39.78156	-80.728875	523388	4403548.6

Bottom Hole Location Information:

LPI	EP_FLAG	UTME	UTMN	LONG_DD	LAT_DD
705101859	1	As Proposed	521903.3	4404681.6	-80.744175

Owner Information:

LPI	CMP_DT	SUFFIX	STATUS	SURFACE_OWNER	WELL_NUM	CO_NUM	LEASE	LEASE_NUM	MINERAL_OWN	OPERATOR_AT_COMPLETION	PROP_VD	PROP_TRGT_FM	TFM_EST_PR
705101859	-/-	Divd Orignd Loc	Cancelled	Dennis W Hunter	84		Hunter Pethtel		Dennis W Hunter et al	Stone Energy Corporation	6140	Marcellus Fr	

Completion Information:

LPI	CMP_DT	SPUD_DT	ELEV	DATUM	FIELD	DEEPEST_FM	DEEPEST_FMT	INITIAL_CLASS	FINAL_CLASS	TYPE	RIG	CMP_MTHD	TVD	TMD	NEW_FTG	KOD	G_BEF	G_AFT	O_BEF	O_AFT	NGL_BEF	NGL_AFT	P_BEF	TI_BEF	P_AFT	TI_AFT	BH_P_BEF	BH_P_AFT	G_MSRO_BY
705101859	-/-	-/-	755	Ground Level																									

Comment: -/- Plat coordinates hard to read, blurry Per WVDEP OOG website, well was cancelled 12/11/2017. No cancellation documents available.

There is no Pay data for this well

Production Gas Information: (Volumes in Mcf)

LPI	PRODUCING_OPERATOR	PRD_YEAR	ANN_GAS	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DCM
705101859	EQT Production Company	2018	0	0	0	0	0	0	0	0	0	0	0	0	0

Production Oil Information: (Volumes in Bbl) ** some operators may have reported NGL under Oil

LPI	PRODUCING_OPERATOR	PRD_YEAR	ANN_OIL	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DCM
705101859	EQT Production Company	2018	0	0	0	0	0	0	0	0	0	0	0	0	0

Production NGL Information: (Volumes in Bbl) ** some operators may have reported NGL under Oil

LPI	PRODUCING_OPERATOR	PRD_YEAR	ANN_NGL	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DCM
705101859	EQT Production Company	2018	0	0	0	0	0	0	0	0	0	0	0	0	0

Production Water Information: (Volumes in Gallons)

LPI	PRODUCING_OPERATOR	PRD_YEAR	ANN_WTR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DCM
705101859	EQT Production Company	2018	0	0	0	0	0	0	0	0	0	0	0	0	0

There is no Stratigraphy data for this well

There is no Wireline (E-Log) data for this well

There is no Plugging data for this well

There is no Sample data for this well

RECEIVED
 Office of Oil and Gas
 JAN 25 2021
 WV Department of
 Environmental Protection

4705102367

Location Information: [View Map](#)

LPI	COUNTY	PERMIT	TAX_DISTRICT	QUAD_76	QUAD_16	LAT_DD	LONG_DD	UTME	UTMN
705101860	Marshall	1860	Meade	Glen Easton	Cameron	39.781673	-80.728548	523416	4403561.3

Bottom Hole Location Information:

LPI	EP_FLAG	UTME	UTMN	LON_DD	LAT_DD
705101860	1	As Proposed	522074.3	4405230.4	-80.74216 39.795748

Owner Information:

LPI	CMP_DT	SUFFIX	STATUS	SURFACE_OWNER	WELL_NUM	CO_NUM	LEASE	LEASE_NUM	MINERAL_OWN	OPERATOR_AT_COMPLETION	PROP_VD	PROP_TRGT_FM	TFM_EST_PR
705101860	--		Cancelled	Dennis W Hunter	10H		Hunter Pethel		Dennis W Hunter et al	Stone Energy Corporation	6140	Marcellus Fm	

Completion Information:

LPI	CMP_DT	SPUD_DT	ELEV	DATUM	FIELD	DEEPEST_FM	DEEPEST_FMT	INITIAL_CLASS	FINAL_CLASS	TYPE	RIG	CMP_MTHD	TVD	TMD	NEW_FTG	KOD	G_BEF	G_AFT	O_BEF	O_AFT	NGL_BEF	NGL_AFT	P_BEF	TL_BEF	P_AFT	TL_AFT	BH_P_BEF	BH_P_AFT	G_MSRD_BY
705101860	--	--	755	Ground Level																									

Comment: -- Per WVDEP OOG website, well was cancelled 12/11/2017. No cancellation documents available.

There is no Pay data for this well

Production Gas Information: (Volumes in Mcf)

LPI	PRODUCING_OPERATOR	PRD_YEAR	ANN_GAS	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DCM
705101860	EQT Production Company	2018	0	0	0	0	0	0	0	0	0	0	0	0	0

Production Oil Information: (Volumes in Bbl) ** some operators may have reported NGL under Oil

LPI	PRODUCING_OPERATOR	PRD_YEAR	ANN_OIL	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DCM
705101860	EQT Production Company	2018	0	0	0	0	0	0	0	0	0	0	0	0	0

Production NGL Information: (Volumes in Bbl) ** some operators may have reported NGL under Oil

LPI	PRODUCING_OPERATOR	PRD_YEAR	ANN_NGL	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DCM
705101860	EQT Production Company	2018	0	0	0	0	0	0	0	0	0	0	0	0	0

Production Water Information: (Volumes in Gallons)

LPI	PRODUCING_OPERATOR	PRD_YEAR	ANN_WTR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DCM
705101860	EQT Production Company	2018	0	0	0	0	0	0	0	0	0	0	0	0	0

There is no Stratigraphy data for this well

There is no Wireline (E-Log) data for this well

There is no Plugging data for this well

There is no Sample data for this well

RECEIVED
 Office of Oil and Gas
 JAN 25 2021
 WV Department of
 Environmental Protection

4705102367

Location Information: [View Map](#)

API	COUNTY	PERMIT	TAX_DISTRICT	QUAD_76	QUAD_16	LAT_DD	LON_DD	UTME	UTMN
1705101866	Marshall	1866	Meade	Glen Easton	Cameron	39.781782	-80.726409	523427.8	4403573.4

Bottom Hole Location Information:

API	EP_FLAG	UTME	UTMN	LON_DD	LAT_DD
1705101866	1 As Proposed	524237.2	4402287.1	-80.717005	39.77017

Owner Information:

API	CMP_DT	SUFFIX	STATUS	SURFACE_OWNER	WELL_NUM	CO_NUM	LEASE	LEASE_NUM	MINERAL_OWN	OPERATOR_AT_COMPLETION	PROP_VD	PROP_TRGT_FM	TFM_EST_PR
1705101866	-/-		Cancelled	Dennis W Hunter	51		Hunter/Petitel		Dennis W Hunter et al	Stone Energy Corporation	6250	Marcellus Fm	4200

Completion Information:

API	CMP_DT	SPUD_DT	ELEV_DATUM	FIELD	DEEPEST_FM	DEEPEST_FMT	INITIAL_CLASS	FINAL_CLASS	TYPE	RIG	CMP_MTHD	TVD	TMD	NEW_FTG	KOD	G_BEF	G_AFT	O_BEF	O_AFT	NGL_BEF	NGL_AFT	P_BEF	T1_BEF	P_AFT	T1_AFT	BH_P_BEF	BH_P_AFT	G_MSRD_BY
1705101866	-/-	-/-	755 Ground Level																									

Comment: -/- Per WVDEP OOG website, well was cancelled 12/11/2017. No cancellation documents available.

There is no Pay data for this well

Production Gas Information: (Volumes in Mcf)

API	PRODUCING_OPERATOR	PRD_YEAR	ANN_GAS	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DCM
1705101866	EQT Production Company	2018	0	0	0	0	0	0	0	0	0	0	0	0	0

Production Oil Information: (Volumes in Bbl) ** some operators may have reported NGL under Oil

API	PRODUCING_OPERATOR	PRD_YEAR	ANN_OIL	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DCM
1705101866	EQT Production Company	2018	0	0	0	0	0	0	0	0	0	0	0	0	0

Production NGL Information: (Volumes in Bbl) ** some operators may have reported NGL under Oil

API	PRODUCING_OPERATOR	PRD_YEAR	ANN_NGL	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DCM
1705101866	EQT Production Company	2018	0	0	0	0	0	0	0	0	0	0	0	0	0

Production Water Information: (Volumes in Gallons)

API	PRODUCING_OPERATOR	PRD_YEAR	ANN_WTR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DCM
1705101866	EQT Production Company	2018	0	0	0	0	0	0	0	0	0	0	0	0	0

There is no Stratigraphy data for this well

There is no Wireline (E-Log) data for this well

There is no Plugging data for this well

There is no Sample data for this well

RECEIVED
 Office of Oil and Gas
 JAN 25 2021
 WV Department of Environmental Protection

4705102367

Location Information: [View Map](#)

API	COUNTY	PERMIT	TAX_DISTRICT	QUAD_75	QUAD_16	LAT_DD	LONG_DD	UTME	UTMN
4705130296	Marshall	30296	Meads	Glen Easton	Cameron	39.795054	-80.735275	522664.1	4405132.9

There is no Bottom Hole Location data for this well

Owner Information:

API	CMP_DT	SUFFIX	STATUS	SURFACE_OWNER	WELL_NUM	CO_NUM	LEASE	LEASE_NUM	MINERAL_OWN	OPERATOR_AT_COMPLETION	PROP_VD	PROP_TRGT_FM	TFM_EST_PR
4705130296	-/-1920	Original Loc	Completed	H & T V Crew	1					Isinger, A. G.			

Completion Information:

API	CMP_DT	SPUD_DT	ELEV	DATUM	FIELD	DEEPEST_FM	DEEPEST_FMT	INITIAL_CLASS	FINAL_CLASS	TYPE	RIG	CMP_MTHD	TVD	TMD	NEW_FTG	KOD	G_BEF	G_AFT	O_BEF	O_AFT	NGL_BEF	NGL_AFT	P_BEF	TL_BEF	P_AFT	TL_AFT	BH_P_BEF	BH_P_AFT	G_MSRD_BY
4705130296	-/-1920	-/-	791	Ground Level				unclassified	unclassified	ret available	unknown	unknown																	

There is no Pay data for this well

There is no Production Gas data for this well

There is no Production Oil data for this well ** some operators may have reported NGL under Oil

There is no Production NGL data for this well ** some operators may have reported NGL under Oil

There is no Production Water data for this well

There is no Stratigraphy data for this well

There is no Wireline (E-Log) data for this well


Plugging Information:

API	PLG_DT	DEPTH_PBT
4705130296	8/30/1949	0

There is no Sample data for this well

RECEIVED
 Office of Oil and Gas
 JAN 25 2021
 WV Department of
 Environmental Protection

4705102367

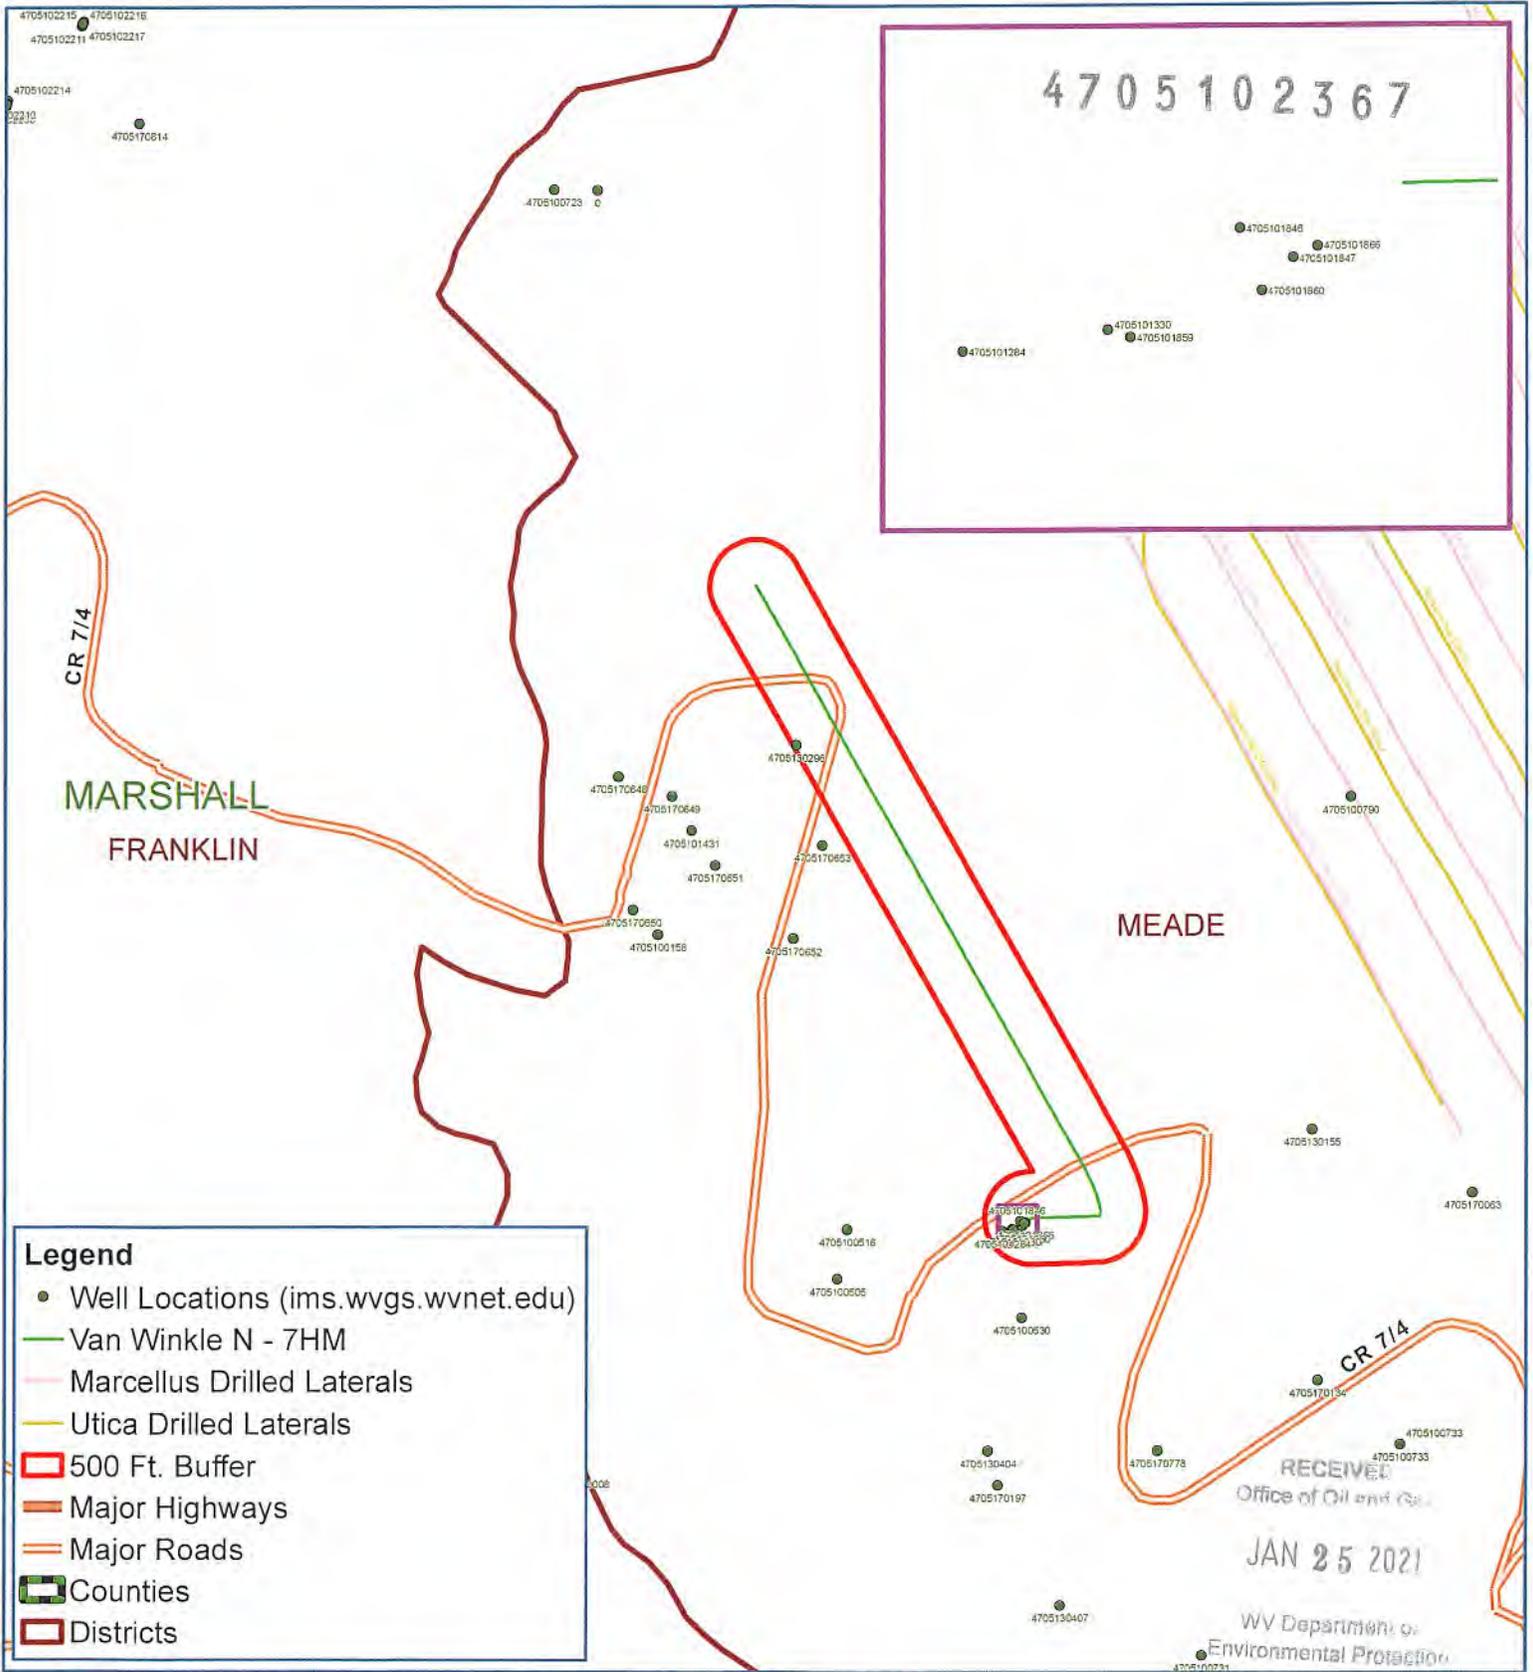

Legend

- Well Locations (ims.wvgs.wvnet.edu)
- Van Winkle N - 7HM
- Marcellus Drilled Laterals
- Utica Drilled Laterals
- 500 Ft. Buffer
- Major Highways
- Major Roads
- ▭ Counties
- ▭ Districts



Van Winkle N - 7HM Meade District Marshall County, WV



Notes:
All locations are approximate and are for visualization purposes only.



Map Prepared by:



4705102367



Well: Van Winkle N-07 HM (slot V)
Site: Van Winkle
Project: Marshall County, West Virginia
Design: rev1
Rig:

Geodetic System: Universal Transverse Mercator (US Survey Feet)
Datum: NAD83 West Virginia - HARN
Ellipsoid: GRS 1980
Zone: Zone 17N (84 W to 78 W)

System Datum: Mean Sea Level
Depth Reference: GL @ 754.00ft

Northing 14447446.67 Easting 1717339.43 Latitude 39.78193600 Longitude -80.72619500

Total Corr (M->G): To convert a Magnetic Direction to a Grid Direction, Subtract 8.82°



Azimuths to Grid North
True North: -0.17°
Magnetic North: -8.82°

Magnetic Field
Strength: 51812.3nT
Dip Angle: 66.60°
Date: 11/13/2020
Model: IGRF2020



SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSec	Annotation
1	0.00	0.00	0.000	0.00	0.00	0.00	0.00	0.000	0.00	
2	1600.00	0.00	0.000	1600.00	0.00	0.00	0.00	0.000	0.00	KOP Begin 2"/100' build
3	2172.51	11.45	88.475	2168.71	1.52	57.00	2.00	88.475	-21.74	Begin 11.45° tangent
4	5515.48	11.45	88.475	5445.15	19.18	720.40	0.00	0.000	-274.78	Begin 8"/100' build
5	6198.17	50.00	338.910	6045.25	285.42	691.85	8.00	-117.704	-19.86	Begin 10"/100' build/turn
6	6615.93	91.00	330.112	6182.00	631.25	522.64	10.00	-13.270	364.88	Begin 91° lateral/turn
7	13696.65	91.00	330.112	6059.00	6769.30	-3005.20	0.00	0.000	7406.40	PBHL/TD 13696.65 MD/6059.00 TVD

DESIGN TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
Van Winkle N-07HM PBHL r1 - plan hits target center	6059.00	6769.30	-3005.20	144454215.96	1714334.23	39.80055100	-80.73682100
Van Winkle N-07HM LP r1 - plan misses target center by 0.08ft at 6615.91ft MD (6182.00 TVD, 631.23 N, 522.65 E)	6182.00	631.19	522.58	14448077.85	1717862.00	39.78366500	-80.72432800

West(-)/East(+) (2000 ft/in)

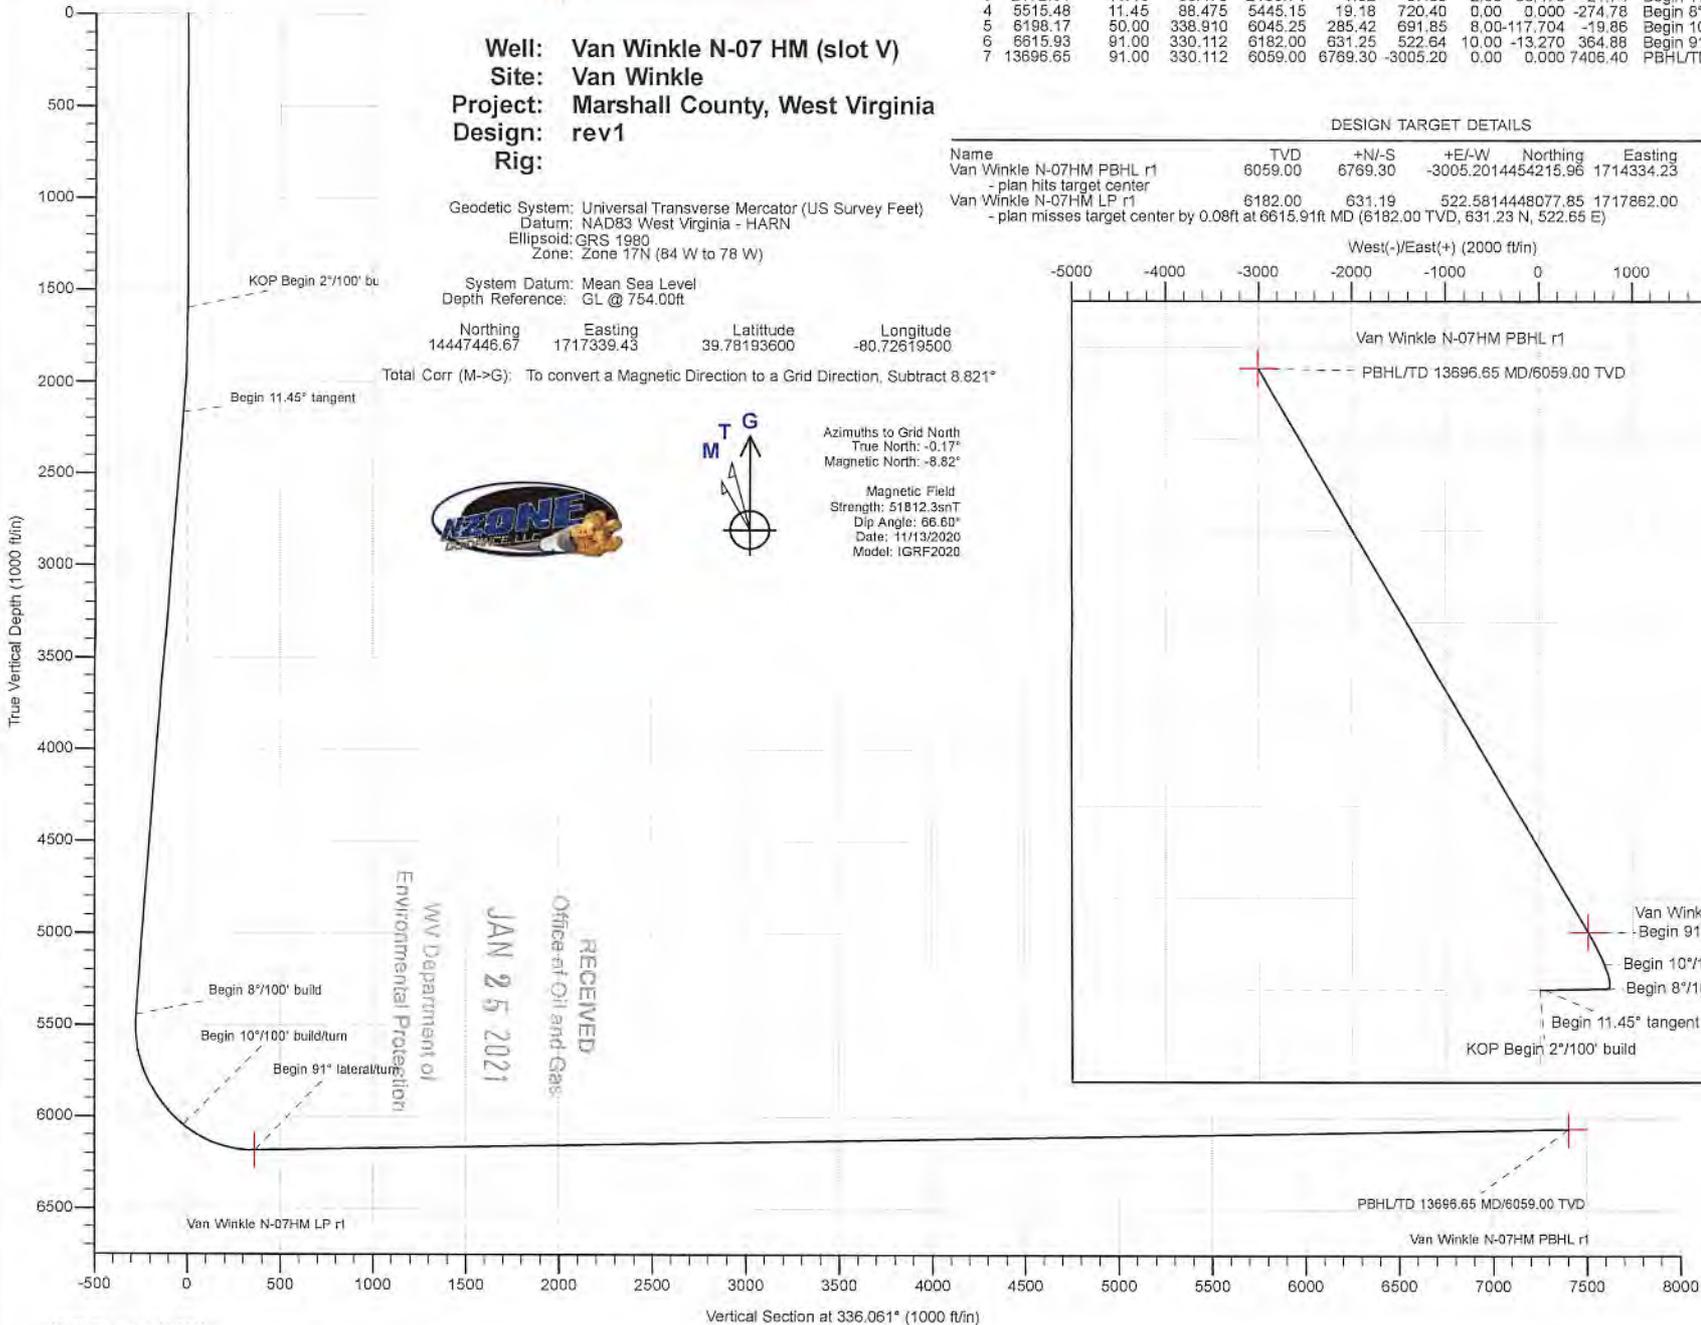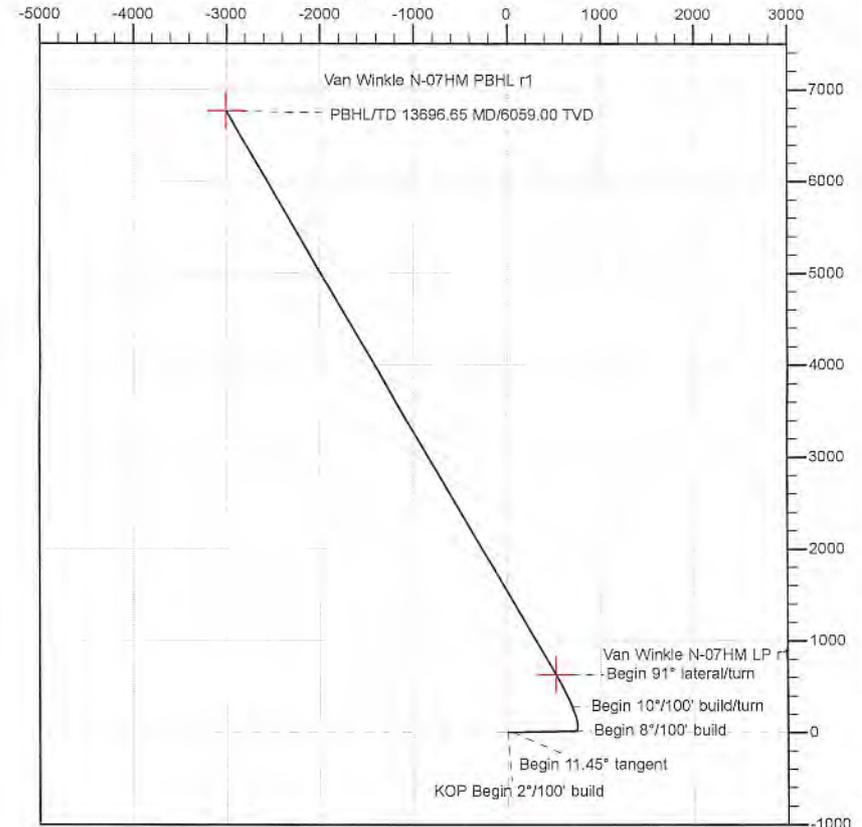

RECEIVED
Office of Oil and Gas
JAN 25 2021
WV Department of
Environmental Protection

4705102367

4705102367



Planning Report - Geographic



Database:	DB_Aug1919_v14	Local Co-ordinate Reference:	Well Van Winkle N-07 HM (slot V)
Company:	Tug Hill Operating LLC	TVD Reference:	GL @ 754.00ft
Project:	Marshall County, West Virginia	MD Reference:	GL @ 754.00ft
Site:	Van Winkle	North Reference:	Grid
Well:	Van Winkle N-07 HM (slot V)	Survey Calculation Method:	Minimum Curvature
Wellbore:	Original Hole		
Design:	rev1		

Project	Marshall County, West Virginia		
Map System:	Universal Transverse Mercator (US Survey Feet)	System Datum:	Mean Sea Level
Geo Datum:	NAD83 West Virginia - HARN		
Map Zone:	Zone 17N (84 W to 78 W)		

Site	Van Winkle				
Site Position:		Northing:	14,447,369.50 usft	Latitude:	39.78172533
From:	Lat/Long	Easting:	1,717,188.44 usft	Longitude:	-80.72673327
Position Uncertainty:	0.00 ft	Slot Radius:	13-3/16 "	Grid Convergence:	0.175 "

Well	Van Winkle N-07 HM (slot V)					
Well Position	+N/-S	0.00 ft	Northing:	14,447,446.67 usft	Latitude:	39.78193600
	+E/-W	0.00 ft	Easting:	1,717,339.43 usft	Longitude:	-80.72619500
Position Uncertainty		0.00 ft	Wellhead Elevation:		Ground Level:	754.00 ft

Wellbore	Original Hole				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	11/13/2020	-8.646	66.595	51,812.27790640

Design	rev1				
Audit Notes:					
Version:	Phase:	PLAN	Tie On Depth:	0.00	
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)	
	0.00	0.00	0.00	336.061	

Plan Survey Tool Program	Date	11/17/2020			
Depth From (ft)	Depth To (ft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.00	13,696.65 rev1 (Original Hole)	MWD		
			MWD - Standard		

RECEIVED
Office of Oil and Gas
JAN 25 2021

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.00	0.00	0.000	0.00	0.00	0.00	0.00	0.00	0.00	0.000	
1,600.00	0.00	0.000	1,600.00	0.00	0.00	0.00	0.00	0.00	0.000	
2,172.51	11.45	88.475	2,168.71	1.52	57.00	2.00	2.00	0.00	88.475	
5,515.48	11.45	88.475	5,445.15	19.18	720.40	0.00	0.00	0.00	0.000	
6,198.17	50.00	338.910	6,045.25	285.42	691.85	8.00	5.65	-16.05	-117.704	
6,615.93	91.00	330.112	6,182.00	631.25	522.64	10.00	9.81	-2.11	-13.270	
13,696.65	91.00	330.112	6,059.00	6,769.30	-3,005.20	0.00	0.00	0.00	0.000	Van Winkle N-07HM F

WV Department of Environmental Protection



Planning Report - Geographic



RECEIVED

Database: DB_Aug1919_v14
 Company: Tug Hill Operating LLC
 Project: Marshall County, West Virginia
 Site: Van Winkle
 Well: Van Winkle N-07 HM (slot V)
 Wellbore: Original Hole
 Design: rev1

Local Co-ordinate Reference: Well Van Winkle N-07 HM (slot V)
 TVD Reference: GL @ 754.00ft
 MD Reference: GL @ 754.00ft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature

JAN 25 2021

WV Department of Environmental Protection

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
0.00	0.00	0.000	0.00	0.00	0.00	14,447,446.67	1,717,339.43	39.78193600	-80.72619500
100.00	0.00	0.000	100.00	0.00	0.00	14,447,446.67	1,717,339.43	39.78193600	-80.72619500
200.00	0.00	0.000	200.00	0.00	0.00	14,447,446.67	1,717,339.43	39.78193600	-80.72619500
300.00	0.00	0.000	300.00	0.00	0.00	14,447,446.67	1,717,339.43	39.78193600	-80.72619500
400.00	0.00	0.000	400.00	0.00	0.00	14,447,446.67	1,717,339.43	39.78193600	-80.72619500
500.00	0.00	0.000	500.00	0.00	0.00	14,447,446.67	1,717,339.43	39.78193600	-80.72619500
600.00	0.00	0.000	600.00	0.00	0.00	14,447,446.67	1,717,339.43	39.78193600	-80.72619500
700.00	0.00	0.000	700.00	0.00	0.00	14,447,446.67	1,717,339.43	39.78193600	-80.72619500
800.00	0.00	0.000	800.00	0.00	0.00	14,447,446.67	1,717,339.43	39.78193600	-80.72619500
900.00	0.00	0.000	900.00	0.00	0.00	14,447,446.67	1,717,339.43	39.78193600	-80.72619500
1,000.00	0.00	0.000	1,000.00	0.00	0.00	14,447,446.67	1,717,339.43	39.78193600	-80.72619500
1,100.00	0.00	0.000	1,100.00	0.00	0.00	14,447,446.67	1,717,339.43	39.78193600	-80.72619500
1,200.00	0.00	0.000	1,200.00	0.00	0.00	14,447,446.67	1,717,339.43	39.78193600	-80.72619500
1,300.00	0.00	0.000	1,300.00	0.00	0.00	14,447,446.67	1,717,339.43	39.78193600	-80.72619500
1,400.00	0.00	0.000	1,400.00	0.00	0.00	14,447,446.67	1,717,339.43	39.78193600	-80.72619500
1,500.00	0.00	0.000	1,500.00	0.00	0.00	14,447,446.67	1,717,339.43	39.78193600	-80.72619500
1,600.00	0.00	0.000	1,600.00	0.00	0.00	14,447,446.67	1,717,339.43	39.78193600	-80.72619500
KOP Begin 2°/100' build									
1,700.00	2.00	88.475	1,699.98	0.05	1.74	14,447,446.72	1,717,341.17	39.78193611	-80.72618879
1,800.00	4.00	88.475	1,799.84	0.19	6.98	14,447,446.85	1,717,346.40	39.78193645	-80.72617017
1,900.00	6.00	88.475	1,899.45	0.42	15.69	14,447,447.09	1,717,355.11	39.78193702	-80.72613916
2,000.00	8.00	88.475	1,998.70	0.74	27.87	14,447,447.41	1,717,367.30	39.78193781	-80.72609579
2,100.00	10.00	88.475	2,097.47	1.16	43.51	14,447,447.83	1,717,382.93	39.78193882	-80.72604013
2,172.51	11.45	88.475	2,168.71	1.52	57.00	14,447,448.19	1,717,396.42	39.78193969	-80.72599211
Begin 11.45° tangent									
2,200.00	11.45	88.475	2,195.85	1.66	62.45	14,447,448.33	1,717,401.88	39.78194004	-80.72597269
2,300.00	11.45	88.475	2,293.66	2.19	82.30	14,447,448.86	1,717,421.72	39.78194133	-80.72590205
2,400.00	11.45	88.475	2,391.67	2.72	102.14	14,447,449.39	1,717,441.57	39.78194261	-80.72583141
2,500.00	11.45	88.475	2,489.68	3.25	121.99	14,447,449.92	1,717,461.41	39.78194389	-80.72576077
2,600.00	11.45	88.475	2,587.69	3.78	141.83	14,447,450.44	1,717,481.25	39.78194518	-80.72569013
2,700.00	11.45	88.475	2,685.70	4.30	161.67	14,447,450.97	1,717,501.10	39.78194646	-80.72561948
2,800.00	11.45	88.475	2,783.71	4.83	181.52	14,447,451.50	1,717,520.94	39.78194775	-80.72554884
2,900.00	11.45	88.475	2,881.72	5.36	201.36	14,447,452.03	1,717,540.79	39.78194903	-80.72547820
3,000.00	11.45	88.475	2,979.73	5.89	221.21	14,447,452.56	1,717,560.63	39.78195031	-80.72540756
3,100.00	11.45	88.475	3,077.74	6.42	241.05	14,447,453.09	1,717,580.48	39.78195160	-80.72533692
3,200.00	11.45	88.475	3,175.75	6.94	260.90	14,447,453.61	1,717,600.32	39.78195288	-80.72526628
3,300.00	11.45	88.475	3,273.76	7.47	280.74	14,447,454.14	1,717,620.17	39.78195416	-80.72519563
3,400.00	11.45	88.475	3,371.77	8.00	300.59	14,447,454.67	1,717,640.01	39.78195545	-80.72512499
3,500.00	11.45	88.475	3,469.78	8.53	320.43	14,447,455.20	1,717,659.86	39.78195673	-80.72505435
3,600.00	11.45	88.475	3,567.79	9.06	340.28	14,447,455.73	1,717,679.70	39.78195801	-80.72498371
3,700.00	11.45	88.475	3,665.80	9.59	360.12	14,447,456.25	1,717,699.55	39.78195930	-80.72491307
3,800.00	11.45	88.475	3,763.81	10.11	379.97	14,447,456.78	1,717,719.39	39.78196058	-80.72484243
3,900.00	11.45	88.475	3,861.82	10.64	399.81	14,447,457.31	1,717,739.23	39.78196186	-80.72477179
4,000.00	11.45	88.475	3,959.83	11.17	419.65	14,447,457.84	1,717,759.08	39.78196315	-80.72470114
4,100.00	11.45	88.475	4,057.84	11.70	439.50	14,447,458.37	1,717,778.92	39.78196443	-80.72463050
4,200.00	11.45	88.475	4,155.84	12.23	459.34	14,447,458.90	1,717,798.77	39.78196571	-80.72455986
4,300.00	11.45	88.475	4,253.85	12.76	479.19	14,447,459.42	1,717,818.61	39.78196700	-80.72448922
4,400.00	11.45	88.475	4,351.86	13.28	499.03	14,447,459.95	1,717,838.46	39.78196828	-80.72441858
4,500.00	11.45	88.475	4,449.87	13.81	518.88	14,447,460.48	1,717,858.30	39.78196956	-80.72434794
4,600.00	11.45	88.475	4,547.88	14.34	538.72	14,447,461.01	1,717,878.15	39.78197084	-80.72427729
4,700.00	11.45	88.475	4,645.89	14.87	558.57	14,447,461.54	1,717,897.99	39.78197213	-80.72420665
4,800.00	11.45	88.475	4,743.90	15.40	578.41	14,447,462.07	1,717,917.84	39.78197341	-80.72413601
4,900.00	11.45	88.475	4,841.91	15.93	598.26	14,447,462.59	1,717,937.68	39.78197469	-80.72406537
5,000.00	11.45	88.475	4,939.92	16.45	618.10	14,447,463.12	1,717,957.53	39.78197598	-80.72399473



4705102367

Planning Report - Geographic



Database: DB_Aug1919_v14
 Company: Tug Hill Operating LLC
 Project: Marshall County, West Virginia
 Site: Van Winkle
 Well: Van Winkle N-07 HM (slot V)
 Wellbore: Original Hole
 Design: rev1

Local Co-ordinate Reference:
 TVD Reference:
 MD Reference:
 North Reference:
 Survey Calculation Method:

Well Van Winkle N-07 HM (slot V)
 GL @ 754.00ft
 GL @ 754.00ft
 Grid
 Minimum Curvature

RECEIVED
 Office of Oil and Gas
 JAN 25 2021
 WV Department of
 Environmental Protection

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
5,100.00	11.45	88.475	5,037.93	16.98	637.95	14,447,463.65	1,717,977.37	39.78197726	-80.72392409
5,200.00	11.45	88.475	5,135.94	17.51	657.79	14,447,464.18	1,717,997.21	39.78197854	-80.72385345
5,300.00	11.45	88.475	5,233.95	18.04	677.64	14,447,464.71	1,718,017.06	39.78197982	-80.72378280
5,400.00	11.45	88.475	5,331.96	18.57	697.48	14,447,465.24	1,718,036.90	39.78198111	-80.72371216
5,500.00	11.45	88.475	5,429.97	19.09	717.32	14,447,465.76	1,718,056.75	39.78198239	-80.72364152
5,515.48	11.45	88.475	5,445.15	19.18	720.40	14,447,465.85	1,718,059.82	39.78198259	-80.72363058
Begin 8°/100' build									
5,600.00	10.22	52.479	5,528.25	23.97	734.74	14,447,470.64	1,718,074.17	39.78199563	-80.72357946
5,700.00	13.77	17.064	5,626.18	40.77	745.29	14,447,487.44	1,718,084.71	39.78204169	-80.72354175
5,800.00	20.04	359.607	5,721.87	69.33	748.67	14,447,516.00	1,718,088.09	39.78212007	-80.72352941
5,900.00	27.20	350.621	5,813.46	109.07	744.82	14,447,555.74	1,718,084.24	39.78222925	-80.72354267
6,000.00	34.71	345.229	5,899.18	159.23	733.82	14,447,605.90	1,718,073.24	39.78236711	-80.72358128
6,100.00	42.38	341.576	5,977.34	218.84	715.88	14,447,665.51	1,718,055.30	39.78253095	-80.72364448
6,198.17	50.00	338.910	6,045.25	285.42	691.85	14,447,732.09	1,718,031.27	39.78271400	-80.72372927
Begin 10°/100' build/turn									
6,200.00	50.18	338.855	6,046.42	286.73	691.34	14,447,733.40	1,718,030.77	39.78271760	-80.72373106
6,300.00	59.94	336.223	6,103.63	362.34	659.96	14,447,809.01	1,717,999.39	39.78292552	-80.72384193
6,400.00	69.75	334.068	6,146.09	444.34	621.90	14,447,891.01	1,717,961.33	39.78315103	-80.72397650
6,500.00	79.58	332.171	6,172.50	530.23	578.32	14,447,976.90	1,717,917.75	39.78338728	-80.72413069
6,600.00	89.43	330.392	6,182.06	617.41	530.54	14,448,064.08	1,717,869.97	39.78362711	-80.72429980
6,615.93	91.00	330.112	6,182.00	631.25	522.64	14,448,077.91	1,717,862.06	39.78366517	-80.72432779
Begin 91° lateral/turn									
6,700.00	91.00	330.112	6,180.54	704.12	480.75	14,448,150.79	1,717,820.18	39.78386565	-80.72447608
6,800.00	91.00	330.112	6,178.80	790.81	430.93	14,448,237.47	1,717,770.35	39.78410413	-80.72465248
6,900.00	91.00	330.112	6,177.07	877.49	381.11	14,448,324.16	1,717,720.53	39.78434282	-80.72482888
7,000.00	91.00	330.112	6,175.33	964.18	331.28	14,448,410.85	1,717,670.71	39.78458111	-80.72500528
7,100.00	91.00	330.112	6,173.59	1,050.87	281.46	14,448,497.53	1,717,620.88	39.78481959	-80.72518168
7,200.00	91.00	330.112	6,171.86	1,137.56	231.64	14,448,584.22	1,717,571.06	39.78505808	-80.72535809
7,300.00	91.00	330.112	6,170.12	1,224.24	181.81	14,448,670.91	1,717,521.24	39.78529656	-80.72553449
7,400.00	91.00	330.112	6,168.38	1,310.93	131.99	14,448,757.60	1,717,471.41	39.78553504	-80.72571090
7,500.00	91.00	330.112	6,166.64	1,397.62	82.17	14,448,844.28	1,717,421.59	39.78577353	-80.72588730
7,600.00	91.00	330.112	6,164.91	1,484.30	32.34	14,448,930.97	1,717,371.77	39.78601201	-80.72606371
7,700.00	91.00	330.112	6,163.17	1,570.99	-17.48	14,449,017.66	1,717,321.95	39.78625049	-80.72624012
7,800.00	91.00	330.112	6,161.43	1,657.68	-67.30	14,449,104.34	1,717,272.12	39.78648898	-80.72641653
7,900.00	91.00	330.112	6,159.70	1,744.36	-117.13	14,449,191.03	1,717,222.30	39.78672746	-80.72659294
8,000.00	91.00	330.112	6,157.96	1,831.05	-166.95	14,449,277.72	1,717,172.48	39.78696594	-80.72676936
8,100.00	91.00	330.112	6,156.22	1,917.74	-216.77	14,449,364.40	1,717,122.65	39.78720442	-80.72694577
8,200.00	91.00	330.112	6,154.48	2,004.42	-266.60	14,449,451.09	1,717,072.83	39.78744291	-80.72712219
8,300.00	91.00	330.112	6,152.75	2,091.11	-316.42	14,449,537.78	1,717,023.01	39.78768139	-80.72729860
8,400.00	91.00	330.112	6,151.01	2,177.80	-366.24	14,449,624.46	1,716,973.18	39.78791987	-80.72747502
8,500.00	91.00	330.112	6,149.27	2,264.49	-416.07	14,449,711.15	1,716,923.36	39.78815835	-80.72765144
8,600.00	91.00	330.112	6,147.54	2,351.17	-465.89	14,449,797.84	1,716,873.54	39.78839683	-80.72782786
8,700.00	91.00	330.112	6,145.80	2,437.86	-515.71	14,449,884.52	1,716,823.71	39.78863531	-80.72800428
8,800.00	91.00	330.112	6,144.06	2,524.55	-565.54	14,449,971.21	1,716,773.89	39.78887379	-80.72818071
8,900.00	91.00	330.112	6,142.32	2,611.23	-615.36	14,450,057.90	1,716,724.07	39.78911227	-80.72835713
9,000.00	91.00	330.112	6,140.59	2,697.92	-665.18	14,450,144.58	1,716,674.24	39.78935075	-80.72853356
9,100.00	91.00	330.112	6,138.85	2,784.61	-715.00	14,450,231.27	1,716,624.42	39.78958923	-80.72870998
9,200.00	91.00	330.112	6,137.11	2,871.29	-764.83	14,450,317.96	1,716,574.60	39.78982771	-80.72888641
9,300.00	91.00	330.112	6,135.38	2,957.98	-814.65	14,450,404.64	1,716,524.78	39.79006619	-80.72906284
9,400.00	91.00	330.112	6,133.64	3,044.67	-864.47	14,450,491.33	1,716,474.95	39.79030467	-80.72923927
9,500.00	91.00	330.112	6,131.90	3,131.36	-914.30	14,450,578.02	1,716,425.13	39.79054315	-80.72941570
9,600.00	91.00	330.112	6,130.16	3,218.04	-964.12	14,450,664.70	1,716,375.31	39.79078162	-80.72959213
9,700.00	91.00	330.112	6,128.43	3,304.73	-1,013.94	14,450,751.39	1,716,325.48	39.79102010	-80.72976857
9,800.00	91.00	330.112	6,126.69	3,391.42	-1,063.77	14,450,838.08	1,716,275.66	39.79125858	-80.72994500



Database: DB_Aug1919_v14
 Company: Tug Hill Operating LLC
 Project: Marshall County, West Virginia
 Site: Van Winkle
 Well: Van Winkle N-07 HM (slot V)
 Wellbore: Original Hole
 Design: rev1

Local Co-ordinate Reference: Well Van Winkle N-07 HM (slot V)
 TVD Reference: GL @ 754.00ft
 MD Reference: GL @ 754.00ft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature

RECEIVED
 Office of Oil and Gas
 JAN 25 2021

WV Department of
 Environmental Protection

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
9,900.00	91.00	330.112	6,124.95	3,478.10	-1,113.59	14,450,924.77	1,716,225.84	39.79149706	-80.73012144
10,000.00	91.00	330.112	6,123.22	3,564.79	-1,163.41	14,451,011.45	1,716,176.01	39.79173553	-80.73029787
10,100.00	91.00	330.112	6,121.48	3,651.48	-1,213.24	14,451,098.14	1,716,126.19	39.79197401	-80.73047431
10,200.00	91.00	330.112	6,119.74	3,738.16	-1,263.06	14,451,184.83	1,716,076.37	39.79221249	-80.73065075
10,300.00	91.00	330.112	6,118.00	3,824.85	-1,312.88	14,451,271.51	1,716,026.54	39.79245096	-80.73082719
10,400.00	91.00	330.112	6,116.27	3,911.54	-1,362.71	14,451,358.20	1,715,976.72	39.79268944	-80.73100364
10,500.00	91.00	330.112	6,114.53	3,998.23	-1,412.53	14,451,444.89	1,715,926.90	39.79292791	-80.73118008
10,600.00	91.00	330.112	6,112.79	4,084.91	-1,462.35	14,451,531.57	1,715,877.08	39.79316639	-80.73135652
10,700.00	91.00	330.112	6,111.06	4,171.60	-1,512.18	14,451,618.26	1,715,827.25	39.79340487	-80.73153297
10,800.00	91.00	330.112	6,109.32	4,258.29	-1,562.00	14,451,704.95	1,715,777.43	39.79364334	-80.73170942
10,900.00	91.00	330.112	6,107.58	4,344.97	-1,611.82	14,451,791.63	1,715,727.61	39.79388181	-80.73188587
11,000.00	91.00	330.112	6,105.84	4,431.66	-1,661.65	14,451,878.32	1,715,677.78	39.79412029	-80.73206232
11,100.00	91.00	330.112	6,104.11	4,518.35	-1,711.47	14,451,965.01	1,715,627.96	39.79435876	-80.73223877
11,200.00	91.00	330.112	6,102.37	4,605.03	-1,761.29	14,452,051.69	1,715,578.14	39.79459724	-80.73241522
11,300.00	91.00	330.112	6,100.63	4,691.72	-1,811.12	14,452,138.38	1,715,528.31	39.79483571	-80.73259167
11,400.00	91.00	330.112	6,098.90	4,778.41	-1,860.94	14,452,225.07	1,715,478.49	39.79507418	-80.73276813
11,500.00	91.00	330.112	6,097.16	4,865.09	-1,910.76	14,452,311.75	1,715,428.67	39.79531266	-80.73294458
11,600.00	91.00	330.112	6,095.42	4,951.78	-1,960.59	14,452,398.44	1,715,378.84	39.79555113	-80.73312104
11,700.00	91.00	330.112	6,093.68	5,038.47	-2,010.41	14,452,485.13	1,715,329.02	39.79578960	-80.73329750
11,800.00	91.00	330.112	6,091.95	5,125.16	-2,060.23	14,452,571.81	1,715,279.20	39.79602807	-80.73347396
11,900.00	91.00	330.112	6,090.21	5,211.84	-2,110.05	14,452,658.50	1,715,229.37	39.79626654	-80.73365042
12,000.00	91.00	330.112	6,088.47	5,298.53	-2,159.88	14,452,745.19	1,715,179.55	39.79650502	-80.73382688
12,100.00	91.00	330.112	6,086.74	5,385.22	-2,209.70	14,452,831.87	1,715,129.73	39.79674349	-80.73400334
12,200.00	91.00	330.112	6,085.00	5,471.90	-2,259.52	14,452,918.56	1,715,079.91	39.79698196	-80.73417980
12,300.00	91.00	330.112	6,083.26	5,558.59	-2,309.35	14,453,005.25	1,715,030.08	39.79722043	-80.73435627
12,400.00	91.00	330.112	6,081.52	5,645.28	-2,359.17	14,453,091.94	1,714,980.26	39.79745890	-80.73453274
12,500.00	91.00	330.112	6,079.79	5,731.96	-2,408.99	14,453,178.62	1,714,930.44	39.79769737	-80.73470920
12,600.00	91.00	330.112	6,078.05	5,818.65	-2,458.82	14,453,265.31	1,714,880.61	39.79793584	-80.73488567
12,700.00	91.00	330.112	6,076.31	5,905.34	-2,508.64	14,453,352.00	1,714,830.79	39.79817431	-80.73506214
12,800.00	91.00	330.112	6,074.58	5,992.03	-2,558.46	14,453,438.68	1,714,780.97	39.79841278	-80.73523861
12,900.00	91.00	330.112	6,072.84	6,078.71	-2,608.29	14,453,525.37	1,714,731.14	39.79865125	-80.73541509
13,000.00	91.00	330.112	6,071.10	6,165.40	-2,658.11	14,453,612.06	1,714,681.32	39.79888972	-80.73559156
13,100.00	91.00	330.112	6,069.36	6,252.09	-2,707.93	14,453,698.74	1,714,631.50	39.79912819	-80.73576804
13,200.00	91.00	330.112	6,067.63	6,338.77	-2,757.76	14,453,785.43	1,714,581.67	39.79936665	-80.73594451
13,300.00	91.00	330.112	6,065.89	6,425.46	-2,807.58	14,453,872.12	1,714,531.85	39.79960512	-80.73612099
13,400.00	91.00	330.112	6,064.15	6,512.15	-2,857.40	14,453,958.80	1,714,482.03	39.79984359	-80.73629747
13,500.00	91.00	330.112	6,062.42	6,598.83	-2,907.23	14,454,045.49	1,714,432.20	39.80008206	-80.73647395
13,600.00	91.00	330.112	6,060.68	6,685.52	-2,957.05	14,454,132.18	1,714,382.38	39.80032052	-80.73665043
13,696.65	91.00	330.112	6,059.00	6,769.30	-3,005.20	14,454,215.96	1,714,332.23	39.80055100	-80.73682100

PBHL/TD 13696.65 MD/6059.00 TVD

Design Targets

Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (usft)	Easting (usft)	Latitude	Longitude
Van Winkle N-07HM PBI - hit/miss target - Shape - Point	0.00	0.000	6,059.00	6,769.30	-3,005.20	14,454,215.96	1,714,334.23	39.80055100	-80.73682100
Van Winkle N-07HM LP - plan misses target center by 0.08ft at 6615.91ft MD (6182.00 TVD, 631.23 N, 522.65 E) - Point	0.00	0.000	6,182.00	631.19	522.58	14,448,077.85	1,717,862.00	39.78366500	-80.72432800



Planning Report - Geographic

4705102367



Database:	DB_Aug1919_v14	Local Co-ordinate Reference:	Well Van Winkle N-07 HM (slot V)
Company:	Tug Hill Operating LLC	TVD Reference:	GL @ 754.00ft
Project:	Marshall County, West Virginia	MD Reference:	GL @ 754.00ft
Site:	Van Winkle	North Reference:	Grid
Well:	Van Winkle N-07 HM (slot V)	Survey Calculation Method:	Minimum Curvature
Wellbore:	Original Hole		
Design:	rev1		

Plan Annotations				
Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment
		+N/-S (ft)	+E/-W (ft)	
1,600.00	1,600.00	0.00	0.00	KOP Begin 2°/100' build
2,172.51	2,168.71	1.52	57.00	Begin 11.45° tangent
5,515.48	5,445.15	19.18	720.40	Begin 8°/100' build
6,198.17	6,045.25	285.42	691.85	Begin 10°/100' build/turn
6,615.93	6,182.00	631.25	522.64	Begin 91° lateral/turn
13,696.65	6,059.00	6,769.30	-3,005.20	PBHL/TD 13696.65 MD/6059.00 TVD

RECEIVED
Office of Oil and Gas
JAN 25 2021
WV Department of
Environmental Protection

4705102367

WW-9
(4/16)

API Number 47 - 051 - _____
Operator's Well No. Van Winkle N-7HM

STATE OF WEST VIRGINIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION
OFFICE OF OIL AND GAS

FLUIDS/ CUTTINGS DISPOSAL & RECLAMATION PLAN

Operator Name Tug Hill Operating, LLC OP Code 494510851

Watershed (HUC 10) Fish Creek Quadrangle Glen Easton 7.5'

Do you anticipate using more than 5,000 bbls of water to complete the proposed well work? Yes No

Will a pit be used? Yes No

If so, please describe anticipated pit waste: AST Tanks with proper containment will be used for staging fresh water for frac and flow back water

Will a synthetic liner be used in the pit? Yes No If so, what ml.? AST Tanks will be used with proper contain +

Proposed Disposal Method For Treated Pit Wastes:

- Land Application
- Underground Injection (UIC Permit Number UIC 2459; UIC 965, UIC 359, UIC 2D0732540, UIC 2D0732523)
- Reuse (at API Number _____)
- Off Site Disposal (Supply form WW-9 for disposal location)
- Other (Explain _____)

Will closed loop system be used? If so, describe: Yes - For vertical and horizontal drilling

Drilling medium anticipated for this well (vertical and horizontal)? Air, freshwater, oil based, etc. Air for vertical/ Oil for Horizontal

-If oil based, what type? Synthetic, petroleum, etc. Synthetic Oil Base

Additives to be used in drilling medium? Barite for weight

Drill cuttings disposal method? Leave in pit, landfill, removed offsite, etc. All drill cuttings to be disposed of in a Landfill

-If left in pit and plan to solidify what medium will be used? (cement, lime, sawdust) N/A

-Landfill or offsite name/permit number? Wetzel County Sanitary Landfill (SWF-1021 / WV0109185) and Westmoreland Sanitary Landfill, LLC (SAN1405 / PA DEP EC#1386426)

Permittee shall provide written notice to the Office of Oil and Gas of any load of drill cuttings or associated waste rejected at any West Virginia solid waste facility. The notice shall be provided within 24 hours of rejection and the permittee shall also disclose where it was properly disposed.

I certify that I understand and agree to the terms and conditions of the GENERAL WATER POLLUTION PERMIT issued on August 1, 2005, by the Office of Oil and Gas of the West Virginia Department of Environmental Protection. I understand that the provisions of the permit are enforceable by law. Violations of any term or condition of the general permit and/or other applicable law or regulation can lead to enforcement action.

I certify under penalty of law that I have personally examined and am familiar with the information submitted on this application form and all attachments thereto and that, based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine or imprisonment.

Company Official Signature James A Pancake
Company Official (Typed Name) James Pancake
Company Official Title Vice President - Geoscience

RECEIVED
Office of Oil and Gas
FEB 03 2021
WV Department of
Environmental Protection

Subscribed and sworn before me this 13 day of JANUARY, 20 21

[Signature]
Commonwealth of Pennsylvania - Notary Seal
David Gabriel Delallo, Notary Public
Washington County
My commission expires February 16, 2024
Commission number 1267492
Member, Pennsylvania Association of Notaries

My commission expires _____

03/12/2021

4705102367

Operator's Well No. Van Winkle N-7HM

Tug Hill Operating, LLC

Proposed Revegetation Treatment: Acres Disturbed 16.63 Prevegetation pH 6.0

Lime 3 Tons/acre or to correct to pH 6.5

Fertilizer type 10-20-20

Fertilizer amount 500 lbs/acre

Mulch 2.5 Tons/acre

Seed Mixtures

Temporary

Permanent

Seed Type	lbs/acre
Annual Ryegrass	40
Spring Oats	96

Seed Type	lbs/acre
Orchard Grass	12
Ladino	3
White Clover	2

Attach:

Maps(s) of road, location, pit and proposed area for land application (unless engineered plans including this info have been provided). If water from the pit will be land applied, include dimensions (L x W x D) of the pit, and dimensions (L x W), and area in acreage, of the land application area.

Photocopied section of involved 7.5' topographic sheet.

Plan Approved by: Bang Stillip

Comments: _____

Title: Oil and Gas Inspector

Date: 1-20-21

Field Reviewed? Yes No

RECEIVED
Office of Oil and Gas

FEB 03 2021


WV Department of
Environmental Protection

03/12/2021

PROPOSED VAN WINKLE N - 7HM 4705102367

NOTES:

1. DRAWING NOT TO SCALE
2. REFERENCE IS HEREBY MADE TO THE WV D.E.P. OFFICE OF OIL & GAS, "EROSION AND SEDIMENT CONTROL FIELD MANUAL" FOR REQUIREMENTS AND BMPs FOR AVERAGE FIELD CONDITIONS CONCERNING THE MAINTENANCE OF EXISTING ROADS AND THE CONSTRUCTION OF PROPOSED ROADS. FIELD CONDITIONS MAY REQUIRE VARIANCE FROM THESE GUIDELINES AND THE EARTHWORK CONTRACTOR IS RESPONSIBLE FOR NOTIFICATION TO THE INSPECTOR AND THE OPERATOR SHOULD THESE CONDITIONS OCCUR.
3. ENTRANCES ONTO PUBLIC ROADS SHALL BE CONSTRUCTED OR MAINTAINED IN ACCORDANCE WITH WV D.O.T. REGULATIONS. ADDITIONAL PERMITS MAY BE REQUIRED.
4. TEMPORARILY SEED AND MULCH ALL SLOPES UPON CONSTRUCTION OF LOCATION.
5. SEE HUNTER PETHTEL N SITE PLAN PREPARED BY KELLEY SURVEYING, FOR COMPLETE CONSTRUCTION & EROSION AND SEDIMENT CONTROL DETAILS.

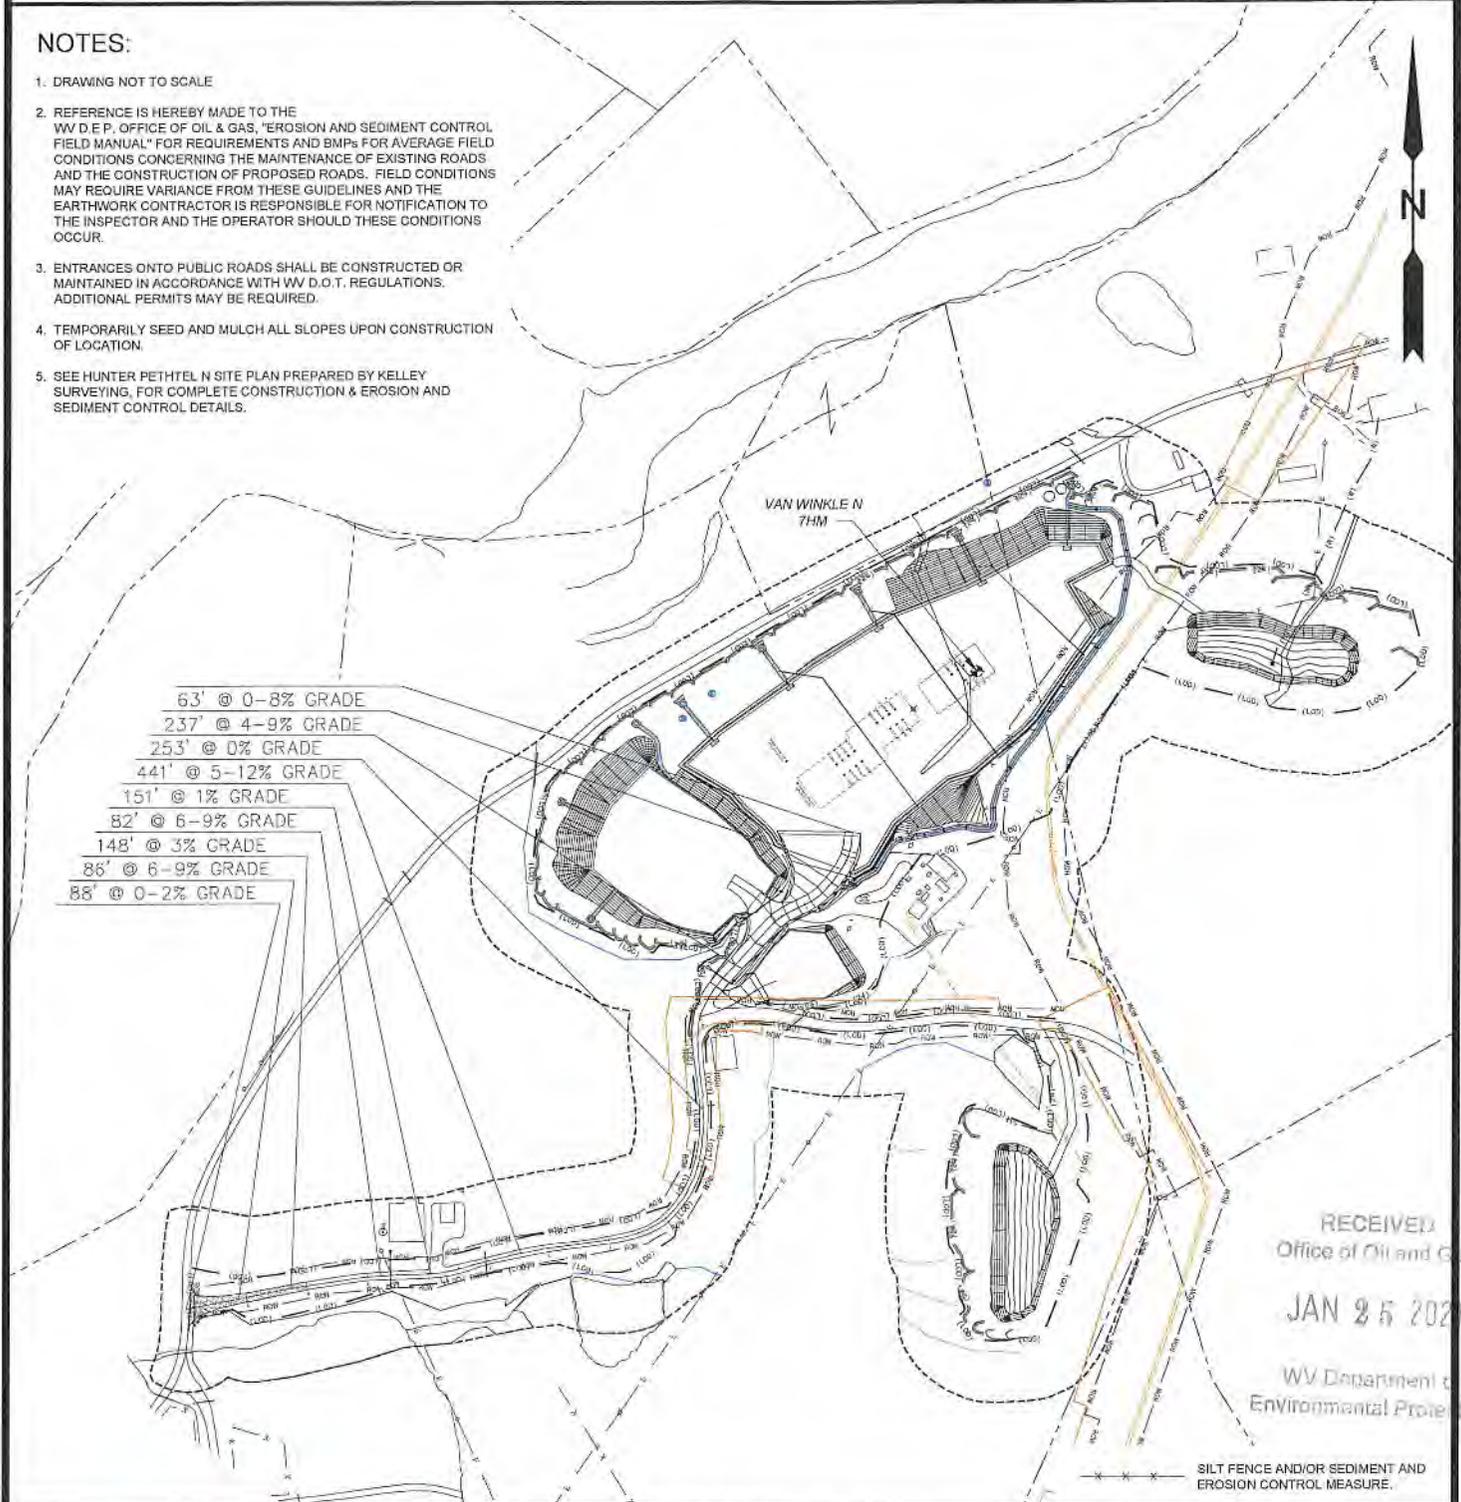


12 Vanhorn Drive | P.O. Box 150 | Glenville, WV 26031 | 304.462.5634
 1412 Ranaaha Boulevard, East | Charleston, WV 25301 | 304.346.3992
 354 East Beckley Bypass | Beckley, WV 25801 | 304.255.5298
 slsvw.com

TOPO SECTION:		OPERATOR:	
GLEN EASTON 7.5'		PREPARED FOR: TUG HILL OPERATING, LLC 380 SOUTHPOINTE BLVD SUITE 200 CANONSBURG, PA 15317	
COUNTY	DISTRICT		
MARSHALL	MEADE		
DRAWN BY	JOB NO.	DATE	SCALE
K.G.M.	8952	12/24/2020	NONE



TUG HILL
OPERATING

03/12/2021

4705102367



Well Site Safety Plan

Tug Hill Operating, LLC

Bang Hill 1-20-21
Well Name: Van Winkle N-7HM
Pad Name: Hunter Pethtel

UTM (meters), NAD83, Zone 17:
Northing: 4,403,590.50
Easting: 523,446.10

January 2021

RECEIVED
Office of Oil and Gas
FEB 03 2021
WV Department of
Environmental Protection

03/12/2021

4705102367

RECEIVED


Office of Oil and Gas

SUPPLEMENT PG. 2
JAN 25 2021

WW-9

PROPOSED VAN WINKLE N - 7HM

WV Department of
Environmental Protection

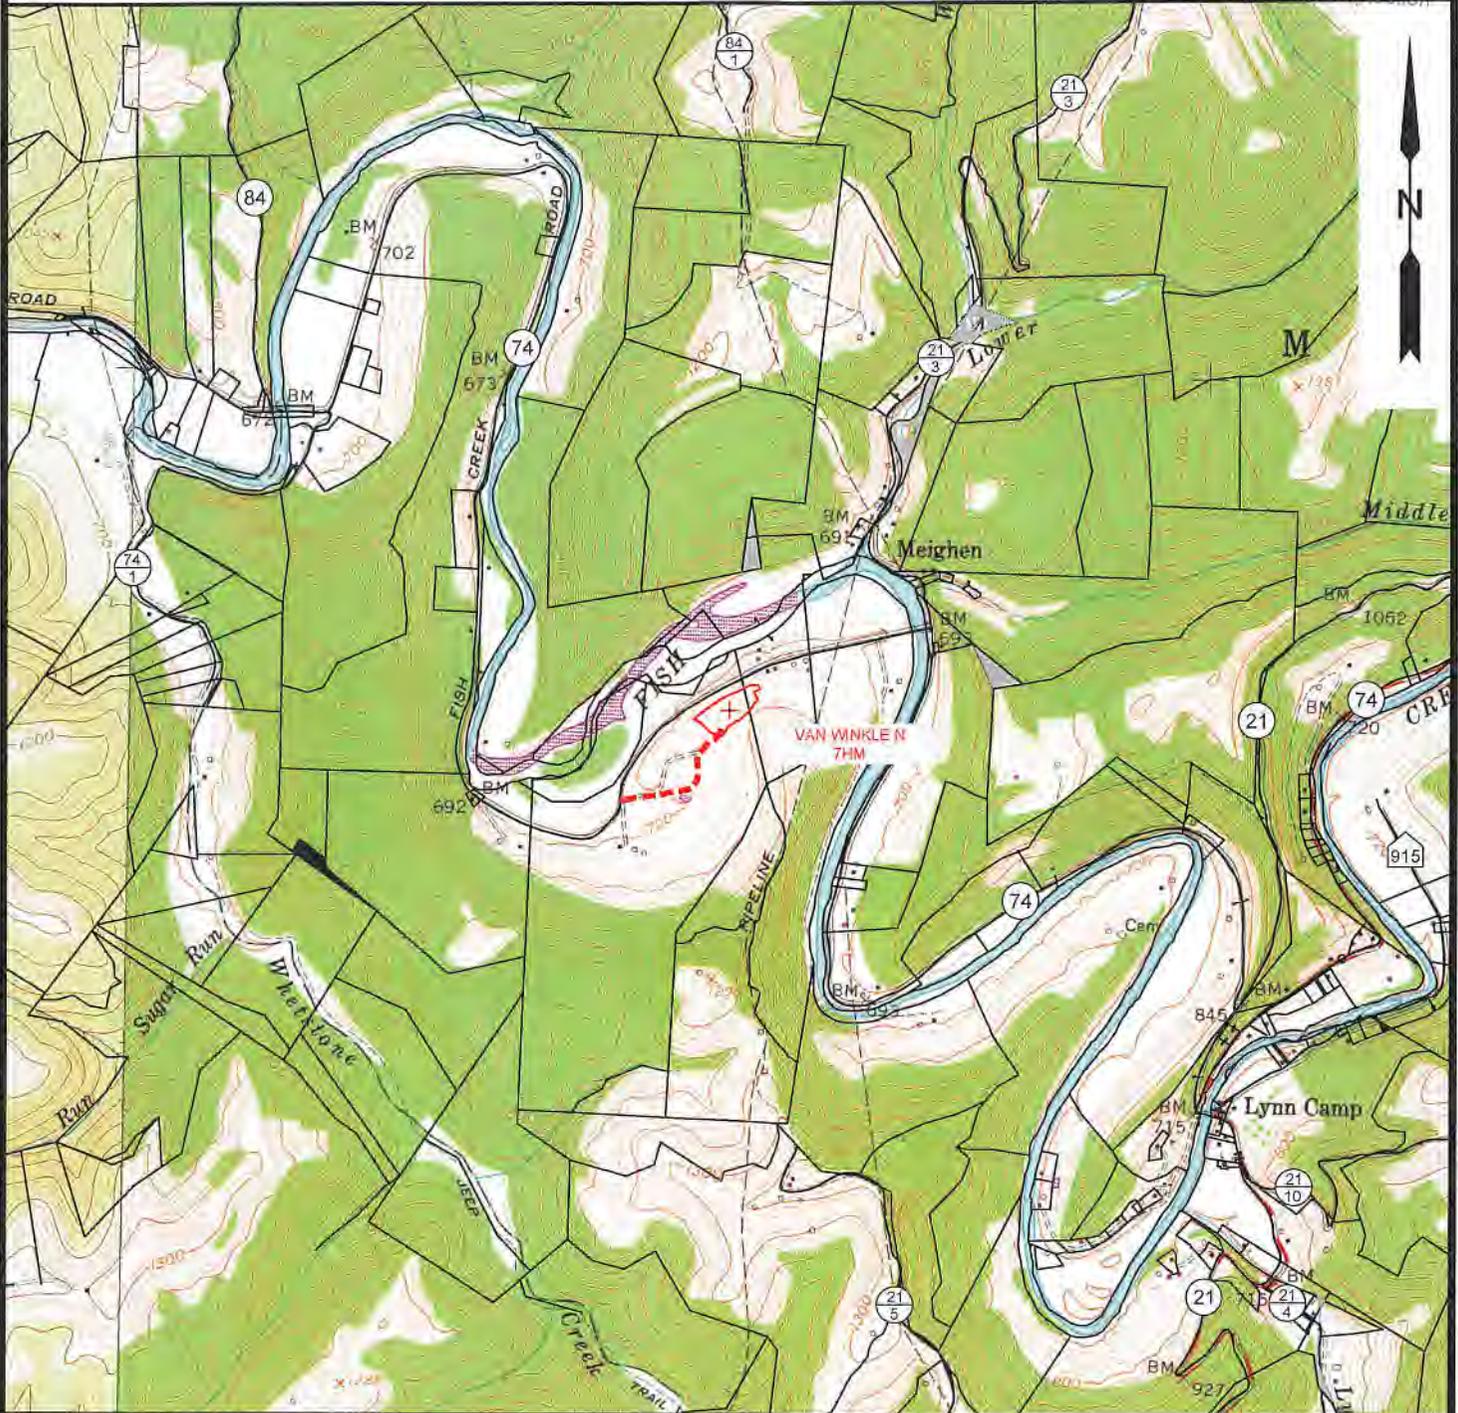

NOTE: CLOSEST WATER PURVEYOR
GRANDVIEW - DOOLIN PUBLIC SERVICE DISTRICT
PROCTOR, WV

LAT: 39.7137712
LON: -80.8258327
LOCATED: S 49°13'48" W AT 37,316.19' FROM THE CENTER OF HUNTER PETHEL N WELL PAD LOCATION.



12 Vanhorn Drive | P.O. Box 150 | Glenville, WV 26351 | 304.462.5654
1412 Kanawha Boulevard, East | Charleston, WV 25301 | 504.348.3952
254 East Beckley Bypass | Beckley, WV 25801 | 304.255.5296
slswv.com

TOPO SECTION:		OPERATOR:	
GLEN EASTON 7.5'		PREPARED FOR:	
COUNTY	DISTRICT	TUG HILL OPERATING, LLC	
MARSHALL	MEADE	380 SOUTHPOINTE BLVD	
		SUITE 200	
		CANONSBURG, PA 15317	
DRAWN BY	JOB NO.	DATE	SCALE
K.G.M.	8952	12/24/2020	1" = 2000'



TUG HILL
OPERATING

03/12/2021

8,004' B.H. 5,020' T.H.

**HUNTER PETHTEL LEASE
VAN WINKLE N 7HM WELL
TUG HILL OPERATING**


T.H. LATITUDE 39°47'30"		
B.H. LATITUDE 39°50'00"		
(S.P.C. NORTH ZONE) (UTM(M) ZONE 17 NORTH)		
NAD'83 S.P.C.(FT)	N. 469,272.46	E. 1,623,905.07
NAD'83 GEO.	LAT-(N) 39.781936	LONG-(W) 80.726195
NAD'83 UTM (M)	N. 4,403,590.50	E. 523,446.10
LANDING POINT		
NAD'83 S.P.C.(FT)	N. 469,895.3	E. 1,624,438.4
NAD'83 GEO.	LAT-(N) 39.783665	LONG-(W) 80.724328
NAD'83 UTM (M)	N. 4,403,783.0	E. 523,605.4
BOTTOM HOLE		
NAD'83 S.P.C.(FT)	N. 476,093.5	E. 1,621,012.4
NAD'83 GEO.	LAT-(N) 39.800551	LONG-(W) 80.736821
NAD'83 UTM (M)	N. 4,405,653.8	E. 522,530.1

T.H. LONGITUDE 80°42'30"
B.H. LONGITUDE 80°42'30"
3,545' T.H.


11,942' B.H.

NOTES ON SURVEY

1. NO WATER WELLS WERE FOUND WITHIN 250' OF PROPOSED GAS WELL. NO AGRICULTURAL BUILDINGS ≥ 2500 SQ. FT. OR DWELLINGS WERE FOUND WITHIN 625' OF THE CENTER OF PROPOSED WELL PAD.
2. WELL SPOT CIRCLE & TOPO MARK SCALE IS 1"=2000'.
3. BASED ON WV DOT COUNTY ROUTE 74 IS A 40' STRIP OF LAND ACQUIRED IN NUMEROUS DEEDS.




REFERENCES

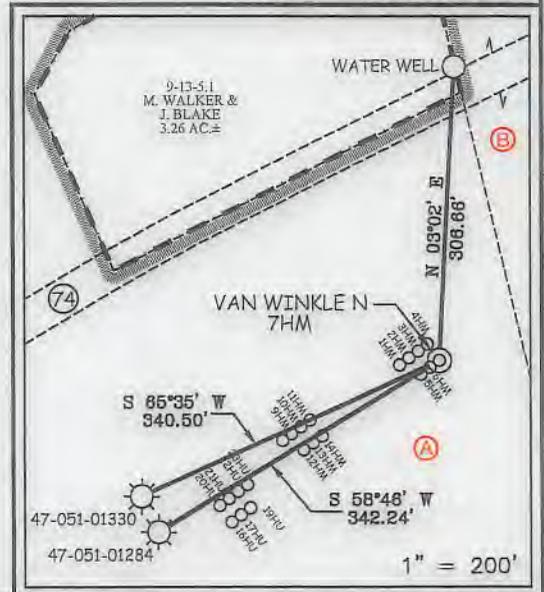

12 Vanhorn Drive | P.O. Box 150 | Glenville, WV 26351 | 304.462.5634
1412 Kanawha Boulevard, East | Charleston, WV 25301 | 304.346.3952
254 East Beckley Bypass | Beckley, WV 25801 | 304.255.5295
sfsww.com

I THE UNDERSIGNED, HEREBY CERTIFY THAT THIS PLAT IS CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF AND SHOWS ALL THE INFORMATION REQUIRED BY LAW AND THE REGULATIONS ISSUED AND PRESCRIBED BY THE DIVISION OF ENVIRONMENTAL PROTECTION.



P.S. C. Victor Moyers
849

(+) DENOTES LOCATION OF WELL ON UNITED STATES TOPOGRAPHIC MAPS.
DATE JANUARY 22, 20 21
REVISED _____
OPERATORS WELL NO. VAN WINKLE N 7HM
API WELL NO. 47-051-02367
STATE COUNTY PERMIT

MINIMUM DEGREE OF ACCURACY 1 / 2500 FILE NO. 8952P7HM.dwg
VAN WINKLE N 7HM-REV1
HORIZONTAL & VERTICAL CONTROL DETERMINED BY DGPS (SURVEY GRADE TIE TO CORS NETWORK) SCALE 1" = 2000'

STATE OF WEST VIRGINIA
DIVISION OF ENVIRONMENTAL PROTECTION
OFFICE OF OIL AND GAS

WELL TYPE: OIL GAS LIQUID INJECTION WASTE DISPOSAL IF "GAS" PRODUCTION STORAGE DEEP SHALLOW

LOCATION: ELEVATION GROUND: 756.30' PROPOSED: 753.50' WATERSHED FISH CREEK (HUC 10)
DISTRICT MEADE COUNTY MARSHALL QUADRANGLE GLEN EASTON 7.5'

SURFACE OWNER XCL MIDSTREAM OPERATING, LLC ACREAGE 190.12 ±
ROYALTY OWNER DENNIS HUNTER, ET AL - SEE WW-6A1 ACREAGE 190.12 ±

PROPOSED WORK: DRILL CONVERT DRILL DEEPER REDRILL FRACTURE OR STIMULATE PLUG OFF OLD FORMATION PERFORATE NEW FORMATION PLUG AND ABANDON CLEAN OUT AND REPLUG OTHER


PHYSICAL CHANGE IN WELL (SPECIFY) _____ TARGET FORMATION MARCELLUS
ESTIMATED DEPTH TVD: 6,297' / TMD: 13,697'

WELL OPERATOR TUG HILL OPERATING, LLC ADDRESS 1320 SOUTH UNIVERSITY DRIVE, SUITE 500 FORT WORTH, TX 76107
DESIGNATED AGENT DIANNA STAMPER CT CORPORATION SYSTEM ADDRESS 5400 D BIG TYLER ROAD CHARLESTON, WV 25313

COUNTY NAME
PERMIT

HUNTER PETHTEL LEASE VAN WINKLE N 7HM WELL TUG HILL OPERATING

TAG	SURFACE OWNER	PARCEL	ACRES
A	XCL MIDSTREAM OPERATING, LLC	9-13-5	190.12
B	MARY VIRGINIA PETHTEL (LIFE)	9-13-6	66.36
C	STATE OF WEST VIRGINIA (FISH CREEK)	N/A	N/A
D	COBLENTZ BROS. INC.	9-10-18	67.88
E	KENNETH W. MASON EST.	9-10-4	67.00
F	WILLIAM N. ROUPE	9-10-3	52.00
G	CAROL VAN SCYOC	9-10-2	206.988
H	CONSOLIDATION COAL COMPANY (MURRAY ENERGY)	9-6-1.2	2.222
I	CONSOLIDATION COAL COMPANY (MURRAY ENERGY)	9-6-3.1	10.00

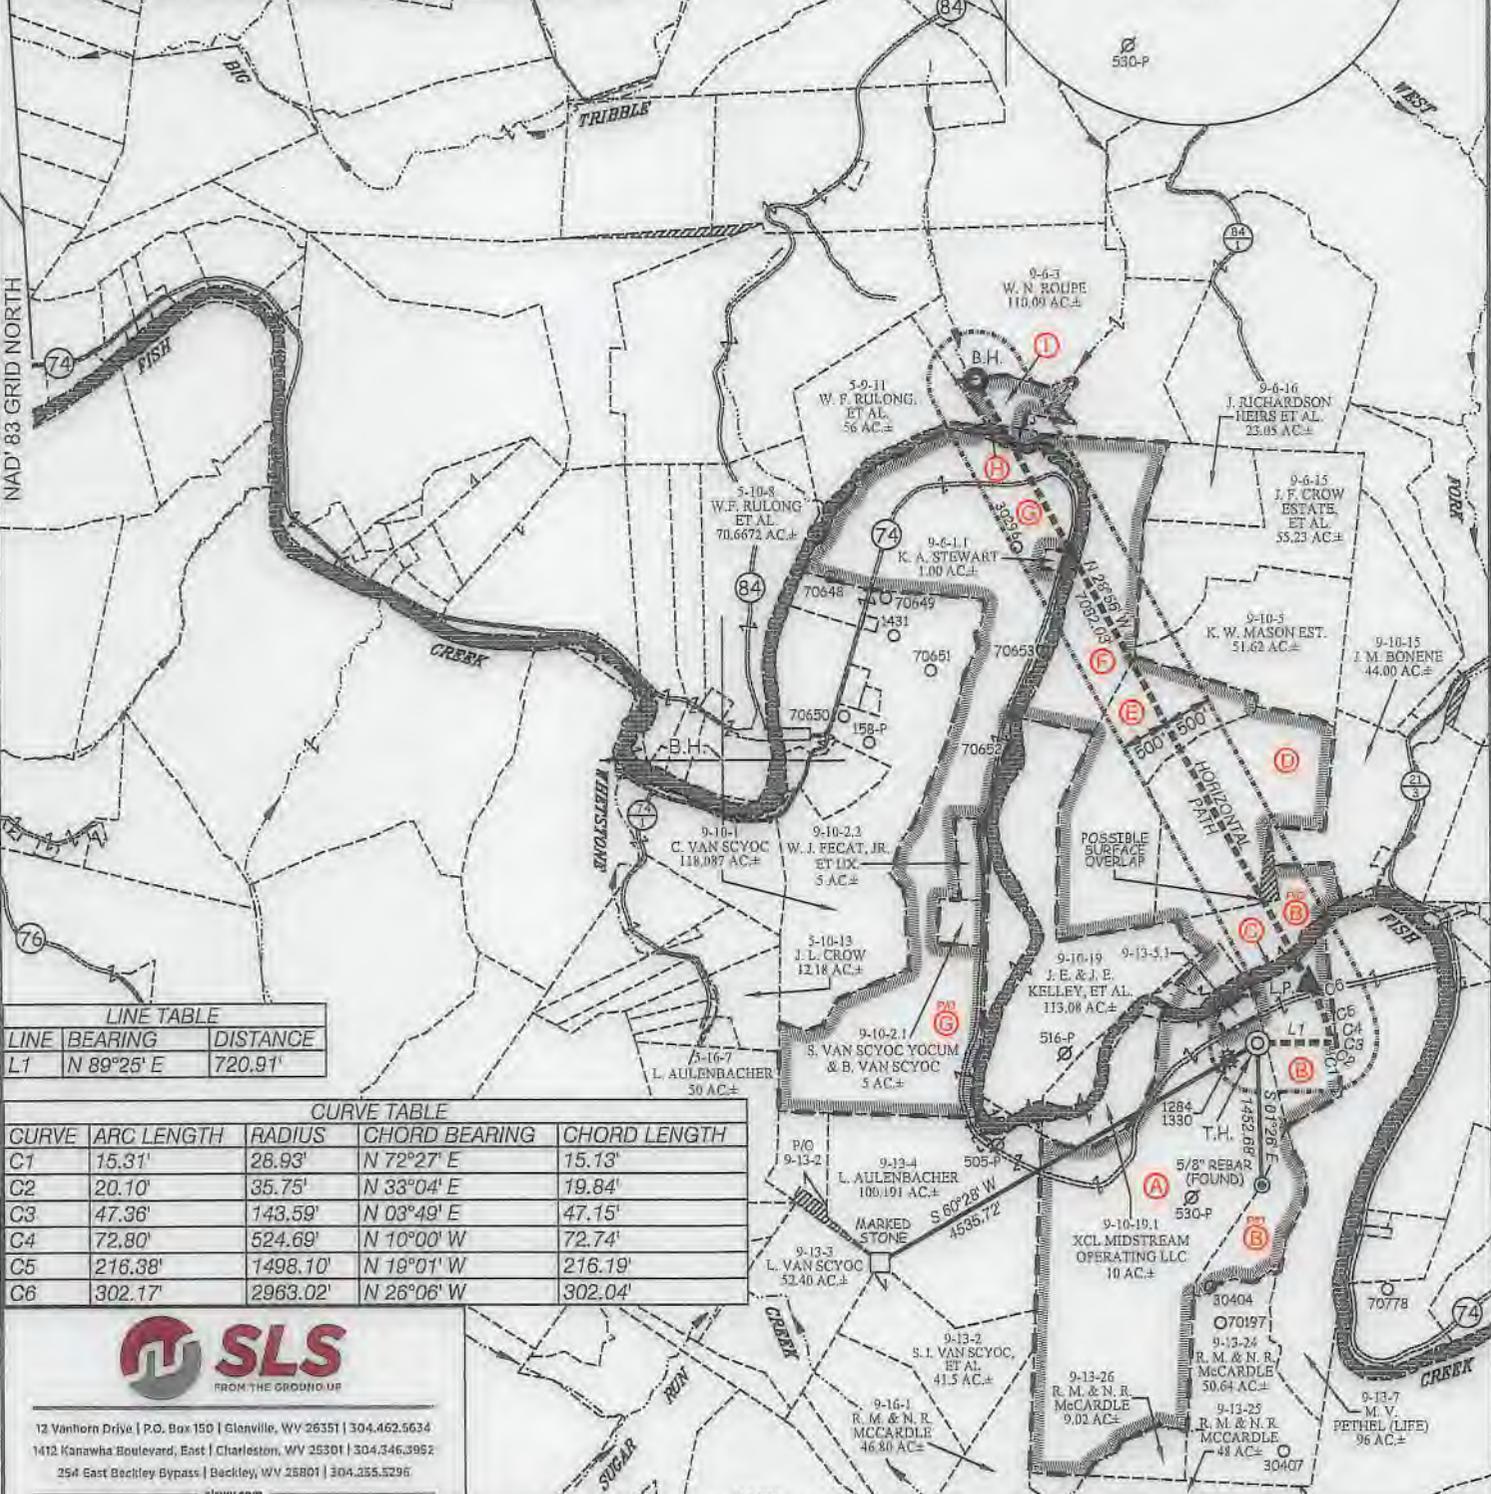

LINE TABLE

LINE	BEARING	DISTANCE
L1	N 89°25' E	720.91'

CURVE TABLE

CURVE	ARC LENGTH	RADIUS	CHORD BEARING	CHORD LENGTH
C1	15.31'	28.93'	N 72°27' E	15.13'
C2	20.10'	35.75'	N 33°04' E	19.84'
C3	47.36'	143.59'	N 03°49' E	47.15'
C4	72.80'	524.69'	N 10°00' W	72.74'
C5	216.38'	1498.10'	N 18°01' W	216.19'
C6	302.17'	2963.02'	N 26°06' W	302.04'

12 Vanhorn Drive | P.O. Box 150 | Glenville, WV 26351 | 304.462.5634
 1412 Kanawha Boulevard, East | Charleston, WV 25301 | 304.346.3952
 254 East Beckley Bypass | Beckley, WV 25801 | 304.255.5296
 slsvv.com

(S.P.C. NORTH ZONE) (UTM(M) ZONE 17 NORTH)

NAD'83 S.P.C.(FT)	N. 469,272.46	E. 1,623,905.07
NAD'83 GEO.	LAT-(N) 39.781936	LONG-(W) 80.726195
NAD'83 UTM (M)	N. 4,403,590.50	E. 523,448.10
LANDING POINT		
NAD'83 S.P.C.(FT)	N. 469,895.9	E. 1,624,438.4
NAD'83 GEO.	LAT-(N) 39.783665	LONG-(W) 80.724328
NAD'83 UTM (M)	N. 4,403,783.0	E. 523,605.4
BOTTOM HOLE		
NAD'83 S.P.C.(FT)	N. 476,093.5	E. 1,621,012.4
NAD'83 GEO.	LAT-(N) 39.800551	LONG-(W) 80.736921
NAD'83 UTM (M)	N. 4,405,653.8	E. 522,530.1



(+) DENOTES LOCATION OF WELL ON UNITED STATES TOPOGRAPHIC MAPS.

P.S. 849 *C. Victor Moyers*

SCALE 1" = 2000' FILE NO. 8952P7HM.dwg
 VAN WINKLE N 7HM-REV1
 DATE JANUARY 22, 20 21
 REVISED _____
 OPERATORS WELL NO. VAN WINKLE N 7HM
 API WELL 47 - 051 -
 NO. STATE COUNTY PERMIT

STATE OF WEST VIRGINIA
 DIVISION OF ENVIRONMENTAL PROTECTION
 OFFICE OF OIL AND GAS

LEGEND

- LEASE LINE
- SURFACE LINE
- WELL LATERAL
- OFFSET LINE
- TIE LINE
- CREEK
- ROAD
- COUNTY ROUTE
- PROPOSED WELL
- EXISTING WELL
- PERMITTED WELL
- TAX MAP-PARCEL
- SURFACE OWNER (SEE TABLE)
- LEASE # (SEE WW-6A1)

03/12/2021

00-00 (A)

WELL OPERATOR TUG HILL OPERATING, LLC DESIGNATED AGENT DIANNA STAMPER
 ADDRESS 1320 SOUTH UNIVERSITY DRIVE, SUITE 500 ADDRESS 5400 D BIG TYLER ROAD
 FORT WORTH, TX 76107 CHARLESTON, WV 25313

COUNTY NAME
 PERMIT

WW-6A1
(5/13)

Operator's Well No. Van Winkle N-7HM

**INFORMATION SUPPLIED UNDER WEST VIRGINIA CODE
Chapter 22, Article 6A, Section 5(a)(5)
IN LIEU OF FILING LEASE(S) AND OTHER CONTINUING CONTRACT(S)**

Under the oath required to make the verification on page 1 of this Notice and Application, I depose and say that I am the person who signed the Notice and Application for the Applicant, and that –

- (1) the tract of land is the same tract described in this Application, partly or wholly depicted in the accompanying plat, and described in the Construction and Reclamation Plan;
- (2) the parties and recordation data (if recorded) for lease(s) or other continuing contract(s) by which the Applicant claims the right to extract, produce or market the oil or gas are as follows:

Lease Name or Number	Grantor, Lessor, etc.	Grantee, Lessee, etc.	Royalty	Book/Page
-------------------------	-----------------------	-----------------------	---------	-----------

*See attached pages

***Co-tenancy utilization – At least 7 mineral owners in tract. At least 75% of the royalty owners have executed a lease on the tract. The interests of the remaining co-tenants were acquired pursuant to the Co-tenancy Modernization and Majority Protection Act.**

**Acknowledgement of Possible Permitting/Approval
In Addition to the Office of Oil and Gas**

The permit applicant for the proposed well work addressed in this application hereby acknowledges the possibility of the need for permits and/or approvals from local, state, or federal entities in addition to the DEP, Office of Oil and Gas, including but not limited to the following:

- WV Division of Water and Waste Management
- WV Division of Natural Resources WV Division of Highways
- U.S. Army Corps of Engineers
- U.S. Fish and Wildlife Service
- County Floodplain Coordinator

The applicant further acknowledges that any Office of Oil and Gas permit in no way overrides, replaces, or nullifies the need for other permits/approvals that may be necessary and further affirms that all needed permits/approvals should be acquired from the appropriate authority before the affected activity is initiated.

Well Operator: Tug Hill Operating, LLC
 By: Amy L. Morris *Amy Morris*
 Its: Permitting Specialist - Appalachia Region

Lease ID	Parcel	Tag	Grantor, Lessor, Etc.	Grantee, Lessee, Etc.	Royalty	Deed Book		Assignment	Assignment	Assignment	Assignment
10*31312	9-13-5	A	DENNIS W HUNTER AND KATHY A HUNTER	CENTRAL MICHIGAN EXPLORATION LLC	1/8+	668	155	N/A	Central Michigan Exploraiton LLC to Stone Energy Corporation: 21/288 & 21/356	Stone Energy Corporation to EQT Production Company: 38/75	EQT Production Company to TH Exploration LLC: 48/21
10*31303	9-13-6	B	MARY V PETHTEL AND FRANK E PETHTEL	CENTRAL MICHIGAN EXPLORATION LLC	1/8+	668	525	N/A	Central Michigan Exploration LLC to Stone Energy Corp.: AB 21/288 & 21/356	Stone Energy Corp. to EQT Production Company: AB 38/75	EQT Production Company to TH Exploration LLC: 48/21
10*31304	9-13-6	B	MARY V PETHTEL AND FRANK E PETHTEL	CENTRAL MICHIGAN EXPLORATION LLC	1/8+	675	171	N/A	Central Michigan Exploration LLC to Stone Energy Corp.: AB 21/288 & 21/356	Stone Energy Corp. to EQT Production Company: AB 38/75	EQT Production Company to TH Exploration LLC: 48/21
10*31306	9-13-6	B	RICHARD CUNNINGHAM	STONE ENERGY CORPORATION	1/8+	859	595	N/A	N/A	Stone Energy Corp. to EQT Production Company: AB 38/75	EQT Production Company to TH Exploration LLC: 48/21
10*31307	9-13-6	B	LINDA DANLEY	STONE ENERGY CORPORATION	1/8+	859	593	N/A	N/A	Stone Energy Corp. to EQT Production Company: AB 38/75	EQT Production Company to TH Exploration LLC: 48/21
10*31308	9-13-6	B	SUZY WALKER	STONE ENERGY CORPORATION	1/8+	859	591	N/A	N/A	Stone Energy Corp. to EQT Production Company: AB 38/75	EQT Production Company to TH Exploration LLC: 48/21
10*23458	FISH CREEK	C	WEST VIRGINIA DIVISION OF NATURAL RESOURCES	TH EXPLORATION LLC	1/8+	1019	373	N/A	N/A	N/A	N/A
10*17383	9-10-18	D	JACQUES ROY	TH EXPLORATION LLC	1/8+	919	631	N/A	N/A	N/A	N/A
10*17385	9-10-18	D	GABRIEL ARTHUR KRAUSE ROY	TH EXPLORATION LLC	1/8+	919	633	N/A	N/A	N/A	N/A
10*17386	9-10-18	D	LYNNE MERYL KRAUSE	TH EXPLORATION LLC	1/8+	919	629	N/A	N/A	N/A	N/A
10*17387	9-10-18	D	JACINTHE KRAUSE-ROY	TH EXPLORATION LLC	1/8+	919	636	N/A	N/A	N/A	N/A
10*19749	9-10-4	E	JOHN CALVERT	TH EXPLORATION LLC	1/8+	944	428	N/A	N/A	N/A	N/A
10*19750	9-10-4	E	DELORES J MYERS	TH EXPLORATION LLC	1/8+	944	430	N/A	N/A	N/A	N/A
10*19824	9-10-4	E	ROBERT BRADLEY HIGGINS	TH EXPLORATION LLC	1/8+	946	57	N/A	N/A	N/A	N/A
10*19972	9-10-4	E	ALBERT J WARSINKY AIF ELLEN K NYLES	TH EXPLORATION LLC	1/8+	948	209	N/A	N/A	N/A	N/A
10*27947	9-10-4	E	STONE HILL MINERALS HOLDINGS LLC	TH EXPLORATION LLC	1/8+	1063	568	N/A	N/A	N/A	N/A
10*29814	9-10-4	E	DAVID P WARSINSKY	TH EXPLORATION LLC	1/8+	1101	29	N/A	N/A	N/A	N/A
10*29816	9-10-4	E	ELLEN K NYLES	TH EXPLORATION LLC	1/8+	1101	31	N/A	N/A	N/A	N/A
PENDING	9-10-4	E	JAMES W MASON AND VICKIE J MASON, ET AL	AB RESOURCES LLC	1/8+	692	461	AB Resources LLC to Chevron USA Inc: 756/397	Chevron USA Inc to Stone Energy Corporation: 33/325	Stone Energy Corp. to EQT Production Company: AB 38/75	EQT Production Company to TH Exploration LLC: 48/21
10*23561	9-10-3	F	VINCENT PATRELLO AND AMANDA PATRELLO	TH EXPLORATION LLC	1/8+	988	97	N/A	N/A	N/A	N/A
10*23562	9-10-3	F	WILLIAM B ROUPE AND KATHERINE A ROUPE	TH EXPLORATION LLC	1/8+	988	94	N/A	N/A	N/A	N/A
10*23563	9-10-3	F	WILLIAM N ROUPE AND VIRGINIA A ROUPE	TH EXPLORATION LLC	1/8+	1009	317	N/A	N/A	N/A	N/A
10*23564	9-10-3	F	CHRISTOPHER A ROUPE AND KARI S ROUPE	TH EXPLORATION LLC	1/8+	988	100	N/A	N/A	N/A	N/A
10*19894	9-10-2	G	CAROL L VANSYOC	TH EXPLORATION LLC	1/8+	941	392	N/A	N/A	N/A	N/A
10*23214	9-6-1.2	H	CNX GAS COMPANY LLC	TH EXPLORATION LLC	1/8+	976	340	N/A	N/A	N/A	N/A
10*18839	9-6-3.1	I	MARGARET DARLENE DUTTON	TH EXPLORATION LLC	1/8+	937	607	N/A	N/A	N/A	N/A
10*18840	9-6-3.1	I	JAY HAROLD DUTTON AND JANICE L DUTTON	TH EXPLORATION LLC	1/8+	937	609	N/A	N/A	N/A	N/A
10*18841	9-6-3.1	I	THEODORE FRANCIS DUTTON AND PHYLLIS JEAN DUTTON	TH EXPLORATION LLC	1/8+	937	612	N/A	N/A	N/A	N/A
10*19000	9-6-3.1	I	KENNETH M MCCARDLE AND DELORES MCCARDLE	CHEVRON USA INC	1/8+	789	154	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 127

RECEIVED
 Office of Oil and Gas
 JAN 25 2017
 WV Department of Environmental Protection

Lease ID	Parcel	Tag	Grantor, Lessor, Etc.	Grantee, Lessee, Etc.	Royalty	Deed Book		Assignment	Assignment	Assignment	Assignment
10*19013	9-6-3.1	I	SUSAN JANE MULLEN AND RICHARD S MULLEN	CHEVRON USA INC	1/8+	789	147	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19014	9-6-3.1	I	JAMES F CARMICHAEL	CHEVRON USA INC	1/8+	793	366	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19015	9-6-3.1	I	SUSAN J CARMICHAEL	CHEVRON USA INC	1/8+	793	433	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19016	9-6-3.1	I	JOHN LINDSEY DERROW	CHEVRON USA INC	1/8+	795	351	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19019	9-6-3.1	I	CATHERINE HUMMEL	CHEVRON USA INC	1/8+	797	602	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19020	9-6-3.1	I	DURWOOD WRIGHT BY CATHERINE HUMMEL AIF	CHEVRON USA INC	1/8+	796	191	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19022	9-6-3.1	I	BETTY L ELMER	CHEVRON USA INC	1/8+	803	240	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19023	9-6-3.1	I	DARLENE K ALBORN	CHEVRON USA INC	1/8+	803	573	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19024	9-6-3.1	I	MARLENE F WAGMILLER	CHEVRON USA INC	1/8+	803	567	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19025	9-6-3.1	I	ELLEN G KIRKBRIDE	CHEVRON USA INC	1/8+	804	615	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19028	9-6-3.1	I	ELMER DEAN EVANS	CHEVRON USA INC	1/8+	805	8	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19062	9-6-3.1	I	BRENDA WOOD	CHEVRON USA INC	1/8+	818	151	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19064	9-6-3.1	I	JODY KORN	CHEVRON USA INC	1/8+	818	137	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19194	9-6-3.1	I	CHARLES D DERROW II	CHEVRON USA INC	1/8+	781	230	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19195	9-6-3.1	I	DAVID DERROW	CHEVRON USA INC	1/8+	781	237	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19196	9-6-3.1	I	JAMES W DERROW	CHEVRON USA INC	1/8+	781	223	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19197	9-6-3.1	I	THOMAS J DERROW	CHEVRON USA INC	1/8+	781	244	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19198	9-6-3.1	I	SAMUEL W DERROW	CHEVRON USA INC	1/8+	781	251	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19199	9-6-3.1	I	CHRISTIE S MITCHELL	CHEVRON USA INC	1/8+	781	277	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19200	9-6-3.1	I	KATHLEEN A KELLEY	CHEVRON USA INC	1/8+	781	300	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19208	9-6-3.1	I	MICHAEL E DERROW JR	CHEVRON USA INC	1/8+	786	146	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19215	9-6-3.1	I	JOSEPH R DERROW	CHEVRON USA INC	1/8+	786	350	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19262	9-6-3.1	I	BARBARA L MCGAHA	CHEVRON USA INC	1/8+	787	400	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127

RECEIVED
Office of Oil and Gas
JAN 25 2021
WV Department of Environmental Protection

Lease ID	Parcel	Tag	Grantor, Lessor, Etc.	Grantee, Lessee, Etc.	Royalty	Deed Book		Assignment	Assignment	Assignment	Assignment
10*19263	9-6-3.1	I	WILLIAM POLEN	CHEVRON USA INC	1/8+	788	224	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19264	9-6-3.1	I	HOWARD E SPEAR AIF PATTIE S MADRID	CHEVRON USA INC	1/8+	788	219	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19265	9-6-3.1	I	BETTY L STARKEY	CHEVRON USA INC	1/8+	788	384	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19266	9-6-3.1	I	DALE ADORIN SALSBERY	CHEVRON USA INC	1/8+	791	66	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19267	9-6-3.1	I	REGINA KAY ST GEORGE AND FRED ST GEOGRE	CHEVRON USA INC	1/8+	788	379	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19268	9-6-3.1	I	ANITA STANLEY	CHEVRON USA INC	1/8+	790	99	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19269	9-6-3.1	I	LINDA D MAYO RONALD A MAYO	CHEVRON USA INC	1/8+	789	501	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19270	9-6-3.1	I	FORREST STARKEY DODA STARKEY	CHEVRON USA INC	1/8+	790	110	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19271	9-6-3.1	I	JANICE M HIXSON AND HARRY C HIXSON	CHEVRON USA INC	1/8+	790	208	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19272	9-6-3.1	I	JOHN M SALSBERY	CHEVRON USA INC	1/8+	792	218	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19273	9-6-3.1	I	JODIE R MORRIS JOHN MORRIS	CHEVRON USA INC	1/8+	790	188	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19274	9-6-3.1	I	ETHEL E STARKEY	CHEVRON USA INC	1/8+	790	203	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19275	9-6-3.1	I	TRACY M SALSBERY	CHEVRON USA INC	1/8+	791	165	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19276	9-6-3.1	I	SANDRA LEE KNAPSKI JOHN KNAPSKI	CHEVRON USA INC	1/8+	790	193	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19277	9-6-3.1	I	GINGER L SALSBERY	CHEVRON USA INC	1/8+	790	198	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19278	9-6-3.1	I	DELLA J COVERDALE TOM COVERDALE	CHEVRON USA INC	1/8+	790	213	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19279	9-6-3.1	I	CALLENE M PETERSON	CHEVRON USA INC	1/8+	789	342	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19280	9-6-3.1	I	BRENT LEE STARKEY	CHEVRON USA INC	1/8+	789	357	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19281	9-6-3.1	I	MAUREEN C COOPER	CHEVRON USA INC	1/8+	790	218	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19282	9-6-3.1	I	KENNETH D MCMECHEN	CHEVRON USA INC	1/8+	789	337	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19283	9-6-3.1	I	SARAH SISLEY ROBERT W SISLEY	CHEVRON USA INC	1/8+	789	332	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19284	9-6-3.1	I	REXENA A CUNNINGHAM	CHEVRON USA INC	1/8+	790	157	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19285	9-6-3.1	I	CARALOTTA J GIBSON	CHEVRON USA INC	1/8+	792	251	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127

RECEIVED
Office of Oil and
Gas
JAN 25 2011
WV Department
Environmental Protection

Lease ID	Parcel	Tag	Grantor, Lessor, Etc.	Grantee, Lessee, Etc.	Royalty	Deed Book		Assignment	Assignment	Assignment	Assignment
10*19286	9-6-3.1	I	ELAINE M KENNER JACK KENNER	CHEVRON USA INC	1/8+	792	256	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19287	9-6-3.1	I	DEBBIE MAE MOORE	CHEVRON USA INC	1/8+	792	234	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19288	9-6-3.1	I	REGINA F HAUGHT DANIEL HAUGHT	CHEVRON USA INC	1/8+	792	174	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19289	9-6-3.1	I	RUIEANN HORSFALL	CHEVRON USA INC	1/8+	793	447	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19290	9-6-3.1	I	RICHARD CECIL LUTISHIA CECIL	CHEVRON USA INC	1/8+	795	399	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19291	9-6-3.1	I	JO ANN HYNDMAN ROBERT HYNDMAN	CHEVRON USA INC	1/8+	800	203	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*19292	9-6-3.1	I	CHARLES M STARKEY TRUST THELMA B STARKEY, SOLE TRUSTEE	CHEVRON USA INC	1/8+	800	223	N/A	N/A	N/A	Chevron USA Inc to TH Exploration LLC: 40/127
10*21007	9-6-3.1	I	SANDRA EILEEN WORKMAN RUSH AND JAMES EARL RUSH	TH EXPLORATION LLC	1/8+	951	638	N/A	N/A	N/A	N/A
10*21008	9-6-3.1	I	DALE EDWARD WORKMAN	TH EXPLORATION LLC	1/8+	949	343	N/A	N/A	N/A	N/A
10*21581	9-6-3.1	I	DAVID CARMICHAEL	TH EXPLORATION LLC	1/8+	957	402	N/A	N/A	N/A	N/A
10*21582	9-6-3.1	I	GARY CARMICHAEL	TH EXPLORATION LLC	1/8+	957	393	N/A	N/A	N/A	N/A
10*22327	9-6-3.1	I	NANCY WHITLATCH	TH EXPLORATION LLC	1/8+	962	551	N/A	N/A	N/A	N/A
10*23214	9-6-3.1	I	CNX GAS COMPANY LLC	TH EXPLORATION LLC	1/8+	976	340	N/A	N/A	N/A	N/A
10*23915	9-6-3.1	I	LAURA L. RISHER, et al. by DAVID WHITE AS SPECIAL COMMISSIONER	TH EXPLORATION LLC	1/8+	1011	523	N/A	N/A	N/A	N/A
10*24718	9-6-3.1	I	DOUGLAS G DERROW	TH EXPLORATION LLC	1/8+	1027	598	N/A	N/A	N/A	N/A
10*24786	9-6-3.1	I	HADEN W DERROW	TH EXPLORATION LLC	1/8+	1027	600	N/A	N/A	N/A	N/A
10*24788	9-6-3.1	I	MICHAEL W DERROW	TH EXPLORATION LLC	1/8+	1027	596	N/A	N/A	N/A	N/A
10*24959	9-6-3.1	I	CODY S DERROW	TH EXPLORATION LLC	1/8+	1028	626	N/A	N/A	N/A	N/A
10*24960	9-6-3.1	I	CHARLES S DERROW	TH EXPLORATION LLC	1/8+	1028	624	N/A	N/A	N/A	N/A
10*25289	9-6-3.1	I	SHERRY KAY RISHER	TH EXPLORATION LLC	1/8+	1030	152	N/A	N/A	N/A	N/A
10*25499	9-6-3.1	I	THOMAS G DERROW AND DOROTHY DERROW	TH EXPLORATION LLC	1/8+	1033	134	N/A	N/A	N/A	N/A
10*26491	9-6-3.1	I	MATTHEW ROY FURBEE	TH EXPLORATION LLC	1/8+	1037	438	N/A	N/A	N/A	N/A
10*26740	9-6-3.1	I	TIMOTHY SEAN GRIFFIN*	TH EXPLORATION LLC	1/8+	1038	190	N/A	N/A	N/A	N/A
10*27159	9-6-3.1	I	CHRISTOPHER FURBEE AND KATIE FURBEE*	TH EXPLORATION LLC	1/8+	1047	438	N/A	N/A	N/A	N/A
10*28148	9-6-3.1	I	MADALYN DERROW	TH EXPLORATION LLC	1/8+	1067	320	N/A	N/A	N/A	N/A
10*28333	9-6-3.1	I	DOUGLAS S SINGER AND TAMMY SINGER	TH EXPLORATION LLC	1/8+	1070	430	N/A	N/A	N/A	N/A
10*28470	9-6-3.1	I	STONE HILL MINERALS HOLDINGS LLC	TH EXPLORATION LLC	1/8+	1072	157	N/A	N/A	N/A	N/A
10*28566	9-6-3.1	I	JODY L JAMES	TH EXPLORATION LLC	1/8+	1072	42	N/A	N/A	N/A	N/A
10*28632	9-6-3.1	I	RANDY D ROBINSON	CHEVRON USA INC	1/8+	976	256	N/A	N/A	N/A	Chevron USA Inc to TH exploration LLC: 45/92
10*28635	9-6-3.1	I	JEFFREY D ROBINSON AND NANCY J ROBINSON	CHEVRON USA INC	1/8+	976	253	N/A	N/A	N/A	Chevron USA Inc to TH exploration LLC: 45/92
10*28636	9-6-3.1	I	MARK A ROBINSON	CHEVRON USA INC	1/8+	986	517	N/A	N/A	N/A	Chevron USA Inc to TH exploration LLC: 45/92
10*28940	9-6-3.1	I	BRANDY R LOVERA AND CHRISTOPHER LOVERA*	TH EXPLORATION LLC	1/8+	1078	24	N/A	N/A	N/A	N/A
10*28942	9-6-3.1	I	BRIAN L FURBEE*	TH EXPLORATION LLC	1/8+	1078	21	N/A	N/A	N/A	N/A
10*28944	9-6-3.1	I	GREGORY D FURBEE*	TH EXPLORATION LLC	1/8+	1078	18	N/A	N/A	N/A	N/A
10*28946	9-6-3.1	I	EDMOND J FURBEE & ESTHER FURBEE*	TH EXPLORATION LLC	1/8+	1078	27	N/A	N/A	N/A	N/A

RECEIVED
Office of Oil and Gas
JAN 25 2021
WV Department of
Environmental Protection

Lease ID	Parcel	Tag	Grantor, Lessor, Etc.	Grantee, Lessee, Etc.	Royalty	Deed Book		Assignment	Assignment	Assignment	Assignment
10*31354	9-6-3.1	I	THOMAS MICHAEL GRIFFIN	STONE ENERGY CORPORATION	1/8+	870	128	N/A	N/A	Stone Energy Corp. to EQT Production Company: AB 38/75	EQT Production Company to TH Exploration LLC: 48/21
10*31358	9-6-3.1	I	THE DERROW FAMILY IRREVOCABLE TRUST CINDY J FOSTER EXECUTRIX	STONE ENERGY CORPORATION	1/8+	874	500	N/A	N/A	Stone Energy Corp. to EQT Production Company: AB 38/75	EQT Production Company to TH Exploration LLC: 48/21
10*31375	9-6-3.1	I	SONDRA S MENENDEZ	STONE ENERGY CORPORATION	1/8+	864	565	N/A	N/A	Stone Energy Corp. to EQT Production Company: AB 38/75	EQT Production Company to TH Exploration LLC: 48/21
10*31376	9-6-3.1	I	JOSEPH MARK MENENDEZ	STONE ENERGY CORPORATION	1/8+	868	440	N/A	N/A	Stone Energy Corp. to EQT Production Company: AB 38/75	EQT Production Company to TH Exploration LLC: 48/21
10*31407	9-6-3.1	I	RUTH FLINNER	STONE ENERGY CORPORATION	1/8+	870	132	N/A	N/A	Stone Energy Corp. to EQT Production Company: AB 38/75	EQT Production Company to TH Exploration LLC: 48/21
10*31408	9-6-3.1	I	VICKY JO GRIFFIN	STONE ENERGY CORPORATION	1/8+	870	134	N/A	N/A	Stone Energy Corp. to EQT Production Company: AB 38/75	EQT Production Company to TH Exploration LLC: 48/21
10*31409	9-6-3.1	I	CATHERINE E GRIFFIN	STONE ENERGY CORPORATION	1/8+	870	134	N/A	N/A	Stone Energy Corp. to EQT Production Company: AB 38/75	EQT Production Company to TH Exploration LLC: 48/21

*Co-tenancy utilization – At least 7 mineral owners in tract. At least 75% of the royalty owners have executed a lease on the tract. The interests of the remaining co-tenants were acquired pursuant to the Co-tenancy Modernization and Majority Protection Act.

RECEIVED
Office of Oil and Gas
JAN 25 2021
WV Department of
Environmental Protection

ASSIGNMENT AND BILL OF SALE

This ASSIGNMENT AND BILL OF SALE (this "Assignment") dated as of December 1, 2020 (the "Execution Date"), is made by and between EQT PRODUCTION COMPANY, a Pennsylvania corporation, with an address at 625 Liberty Avenue, Suite 1700, Pittsburgh, Pennsylvania 15222 ("EQT"), and TH EXPLORATION, LLC, a Texas limited liability company, with an address at 1320 S. University Drive, Suite 500, Fort Worth, Texas 76107 ("TH") pursuant to the terms of that certain Acreage Trade Agreement by and among EQT, TH and TH Exploration II, LLC ("TH II"), dated July 8, 2020 (the "Agreement"). EQT and TH may be referred to herein together as the "Parties", and each individually as a "Party".

RECITALS

WHEREAS, EQT desires to transfer, convey and assign to TH certain of EQT's oil and gas leasehold interests located in Marshall County, West Virginia set forth on Exhibit A attached hereto and incorporated herein ("EQT Leases") in accordance with this Assignment and the Agreement; and

WHEREAS, TH desires to receive from EQT, all of EQT's right, title and interest in and to the EQT Leases in accordance with this Assignment and the Agreement.

NOW, THEREFORE, for and in consideration of the mutual promises contained herein and in the Agreement, the benefits to be derived by each Party hereunder and under the Agreement, and other good and valuable consideration, the receipt and sufficiency of which are hereby acknowledged, the Parties hereby agree as follows:

ARTICLE I
DEFINED TERMS

1.1 *Definitions.* Capitalized terms used herein and not otherwise defined throughout this Assignment shall have the meanings given such terms in the Agreement.

ARTICLE II
ASSIGNMENT OF ASSETS

2.1 *Assignment.* Subject to the terms and conditions of this Assignment and the Agreement, EQT does hereby assign, convey and transfer to TH all of the right, title and interest of EQT in and to the following (collectively for purposes of this Assignment, the "EQT Assets"):

(a) Subject to the conveyance of the Wells Assets from EQT to TH II as described in the Agreement, the EQT Leases and appurtenances thereto (including rights of access and to install facilities), all Hydrocarbons within, produced from, derived from, or sold from the EQT Leases (and all proceeds related thereto), on and after the Valuation Date, and all Surface Contracts including but not limited to those set forth on Exhibit B attached hereto and incorporated herein (the "EQT Surface Contracts") related to the EQT Leases and such Hydrocarbons; and

(b) Copies of deeds, files and all other ownership information directly related to the acquisition, operations and maintenance of the EQT Leases, lease files for the EQT Leases

RECEIVED
Office of Oil and Gas

JAN 25 2021

WV Department of
Environmental Protection

03/12/2021

MICHAEL MORAN
BRIGHTON RESOURCES
5851 ELLSWORTH AVENUE, #1
PITTSBURGH PA 15232-1707

BOOK 0040 PAGE 0127

4705102367

STATE OF WEST VIRGINIA §
§
COUNTY OF MARSHALL §

Marshall County
Jan Pest, Clerk
Instrument 1428356
08/16/2017 @ 12:08:49 PM
ASSIGNMENTS
Book 40 @ Page 127
Pages Recorded 25
Recording Cost \$ 33.00

ASSIGNMENT AND CONVEYANCE

THIS ASSIGNMENT AND CONVEYANCE (the "Assignment") is made and entered into this 1 day of August, 2017 (the "Effective Date"), by and between CHEVRON U.S.A. INC. (hereinafter "Assignor") and TH EXPLORATION, LLC (hereinafter "Assignee") pursuant to the terms of that certain Acreage Trade Agreement between the Assignor and the Assignee dated the 1st day of August, 2017 (the "Acreage Trade Agreement"). Capitalized terms used but not defined herein and defined in the Acreage Trade Agreement shall have the meanings given to such terms in the Acreage Trade Agreement.

WITNESSETH:

WHEREAS, Assignor desires to assign, set over, and transfer to Assignee all of Assignor's right, title, and interest in and to those certain Oil and Gas Leases situated in Marshall County, West Virginia, as described in Exhibit "A", attached hereto and made a part hereof (hereinafter the "Leases"), less and except certain overriding royalty interests and exclusions; and

WHEREAS, Assignor desires to assign, set over, and transfer to Assignee all of Assignor's right, title, and interest in and to the Leases as described below, subject to certain overriding royalty interests and less and except certain exclusions.

NOW, THEREFORE, for good and valuable consideration, the receipt and sufficiency of which are hereby acknowledged, and subject to the limited warranties, restrictions and conditions hereinafter mentioned, the parties hereto, intending to be legally bound, do covenant and agree as follows:

1. Assignment. Assignor does hereby grant, bargain, sell, convey, deliver, assign, set over and transfer, as of the Effective Date, to Assignee, its respective successors and assigns, forever, all of Assignor's right, title and interest in and to the Leases, and the lands covered thereby, together with all rights incident thereto and appurtenances thereon, except that Assignor excepts and reserves from this Assignment the following:

A. The Chevron ORRI previously conveyed to Assignor and as described in that certain Memorandum of Assignment of Oil and Gas Lease Interests dated November 6, 2012 by and between Cornell Holdings Incorporated and Chevron U.S.A. Inc., which is recorded at Book 0028, Page 0239 in the Office of the County Clerk of Marshall County, West Virginia, and

B. As to each of the Leases and all oil, gas, and associated hydrocarbons produced, saved and sold thereunder, an overriding royalty interest equal to the difference between 82% and the

RECEIVED
Office of Oil and Gas

JAN 25 2021

WV Department of
Environmental Protection

03/12/2021

STATE OF WEST VIRGINIA §
§
COUNTY OF MARSHALL §

ASSIGNMENT AND CONVEYANCE

THIS ASSIGNMENT AND CONVEYANCE (the "Assignment") is made and entered into this 10th day of February, 2020 (the "Effective Date"), by and between CHEVRON U.S.A. INC., a Pennsylvania corporation, with an address at 700 Cherrington Parkway, Coraopolis, PA 15108 (hereinafter "Assignor") and TH EXPLORATION, LLC a Pennsylvania corporation, with an address at 700 Cherrington Parkway, Coraopolis, PA 15108 a Texas limited liability company, with an address at 1320 S. University Drive, Suite 500, Fort Worth, TX 76107 (hereinafter "Assignee")

WITNESSETH:

WHEREAS, Assignor desires to assign, set over, and transfer to Assignee all of Assignor's right, title, and interest in and to those certain Oil and Gas Leases situated in Marshall County, West Virginia, as described in Exhibit "A", attached hereto and made a part hereof (hereinafter the "Leases"), less and except certain exclusions; and

WHEREAS, this Assignment is meant to serve, in part, as a correction to certain prior assignments by and between the parties, as more specifically set forth on Exhibit A.

NOW, THEREFORE, for good and valuable consideration, the receipt and sufficiency of which are hereby acknowledged, and subject to the limited warranties, restrictions and conditions hereinafter mentioned, the parties hereto, intending to be legally bound, do covenant and agree as follows:

1. Assignment. Assignor does hereby grant, bargain, sell, convey, deliver, assign, set over and transfer, as of the Effective Date, to Assignee, its respective successors and assigns, forever, all of Assignor's right, title and interest in and to the Leases, and the lands covered thereby, together with all rights incident thereto and appurtenances thereon, except that Assignor excepts and reserves from this Assignment the following:

- A. Any portion of the Leases set forth in the column entitled "Less and Except" on Exhibit A.

TO HAVE AND TO HOLD such right, title and interest in and to the Leases unto Assignee or its designee, and their respective successors and assigns, forever, in accordance with the provisions of this Assignment.

2. Special Warranty. Assignor represents and warrants that Assignor has not conveyed or otherwise encumbered its interest in the Leases since the time that Assignor obtained its interests in the Leases. Assignor does covenant, promise and agree, to and with the Assignee, its respective successors and assigns, to forever specially warrant and defend the title to the Leases or portions thereof included under this Assignment, unto the Assignee and its respective successors and assigns, against the lawful claims of Assignor, and all persons claiming, or to claim, the same or any part thereof, by, through or under Assignor.

RECEIVED
Office of Oil and Gas
JAN 25 2021
WV Department of
Environmental Protection



TUG HILL 4705102367

January 21, 2020

WV Department of Environmental Protection
Office of Oil & Gas
601 57th Street, SE
Charleston, WV 25304
Attention: Wade Stansberry

RE: Van Winkle N-7HM

Subject: Marshall County Route 74 Road Crossing Letter

Dear Wade:

Tug Hill Operating, LLC (THO) hereby submits this letter as confirmation that THO has obtained the right to drill, extract and produce the minerals under Marshall County Route 74 in the area reflected on the Van Winkle N-7HM well plat. THO has conducted a full title search in the relevant Court House to confirm its ownership under said County Routes and is not currently aware of any recorded document that would suggest an ownership other than THO.

If your office has any questions or concerns regarding the contents of this letter, please do not hesitate to contact me directly at 304-376-0111, or by email at amorris@tug-hilop.com.

Sincerely,

Amy Morris
Permit Specialist – Appalachia Region
Cell 304-376-0111
Email: amiller@tug-hilop.com

RECEIVED
Office of Oil and Gas
JAN 25 2021
WV Department of
Environmental Protection

03/12/2021

**STATE OF WEST VIRGINIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS
NOTICE CERTIFICATION**

Date of Notice Certification: 01/22/2021

API No. 47- 051

Operator's Well No. Van Winkle N-7HM

Well Pad Name: Hunter Pathlet

Notice has been given:

Pursuant to the provisions in West Virginia Code § 22-6A, the Operator has provided the required parties with the Notice Forms listed below for the tract of land as follows:

State:	<u>West Virginia</u>	UTM NAD 83 Easting:	<u>523,446.10</u>
County:	<u>Marshall</u>	UTM NAD 83 Northing:	<u>4,403,590.50</u>
District:	<u>Meade</u>	Public Road Access:	<u>County Route 74</u>
Quadrangle:	<u>Glen Easton 7.5'</u>	Generally used farm name:	<u>XcL Midstream Operating, LLC</u>
Watershed:	<u>Fish Creek (HUC 10)</u>		

Pursuant to West Virginia Code § 22-6A-7(b), every permit application filed under this section shall be on a form as may be prescribed by the secretary, shall be verified and shall contain the following information: (14) A certification from the operator that (i) it has provided the owners of the surface described in subdivisions (1), (2) and (4), subsection (b), section ten of this article, the information required by subsections (b) and (c), section sixteen of this article; (ii) that the requirement was deemed satisfied as a result of giving the surface owner notice of entry to survey pursuant to subsection (a), section ten of this article six-a; or (iii) the notice requirements of subsection (b), section sixteen of this article were waived in writing by the surface owner; and Pursuant to West Virginia Code § 22-6A-11(b), the applicant shall tender proof of and certify to the secretary that the notice requirements of section ten of this article have been completed by the applicant.

<p>Pursuant to West Virginia Code § 22-6A, the Operator has attached proof to this Notice Certification that the Operator has properly served the required parties with the following:</p> <p>*PLEASE CHECK ALL THAT APPLY</p> <p><input type="checkbox"/> 1. NOTICE OF SEISMIC ACTIVITY or <input checked="" type="checkbox"/> NOTICE NOT REQUIRED BECAUSE NO SEISMIC ACTIVITY WAS CONDUCTED</p> <p><input checked="" type="checkbox"/> 2. NOTICE OF ENTRY FOR PLAT SURVEY or <input type="checkbox"/> NO PLAT SURVEY WAS CONDUCTED</p> <p><input type="checkbox"/> 3. NOTICE OF INTENT TO DRILL or <input checked="" type="checkbox"/> NOTICE NOT REQUIRED BECAUSE NOTICE OF ENTRY FOR PLAT SURVEY WAS CONDUCTED or</p> <p><input type="checkbox"/> WRITTEN WAIVER BY SURFACE OWNER (PLEASE ATTACH)</p> <p><input checked="" type="checkbox"/> 4. NOTICE OF PLANNED OPERATION</p> <p><input checked="" type="checkbox"/> 5. PUBLIC NOTICE</p> <p><input checked="" type="checkbox"/> 6. NOTICE OF APPLICATION</p>	<p>OOG OFFICE USE ONLY</p> <p><input type="checkbox"/> RECEIVED/ NOT REQUIRED</p> <p><input checked="" type="checkbox"/> RECEIVED</p> <p><input type="checkbox"/> RECEIVED/ NOT REQUIRED</p> <p><input checked="" type="checkbox"/> RECEIVED</p> <p><input checked="" type="checkbox"/> RECEIVED</p> <p><input checked="" type="checkbox"/> RECEIVED</p>
---	---

RECEIVED
Office of Oil and Gas
JAN 25 2021
West Virginia
Department of
Environmental Protection

Required Attachments:

The Operator shall attach to this Notice Certification Form all Notice Forms and Certifications of Notice that have been provided to the required parties and/or any associated written waivers. For the Public Notice, the operator shall attach a copy of the Class II Legal Advertisement with publication date verification or the associated Affidavit of Publication. The attached Notice Forms and Certifications of Notice shall serve as proof that the required parties have been noticed as required under West Virginia Code § 22-6A. Pursuant to West Virginia Code § 22-6A-11(b), the Certification of Notice to the person may be made by affidavit of personal service, the return receipt card or other postal receipt for certified mailing.


03/12/2021

Certification of Notice is hereby given:

THEREFORE, I Amy L. Morris, have read and understand the notice requirements within West Virginia Code § 22-6A. I certify that as required under West Virginia Code § 22-6A, I have served the attached copies of the Notice Forms, identified above, to the required parties through personal service, by registered mail or by any method of delivery that requires a receipt or signature confirmation. I certify under penalty of law that I have personally examined and am familiar with the information submitted in this Notice Certification and all attachments, and that based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the information is true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment.

Well Operator: Tug Hill Operating, LLC
By: *Amy L. Morris*
Its: Permitting Specialist - Appalachia Region
Telephone: 724-749-8388

Address: 380 Southpointe Boulevard, Plaza II, Suite 200
Canonsburg, PA 15317
Facsimile: 724-338-2030
Email: amorris@tug-hill.com

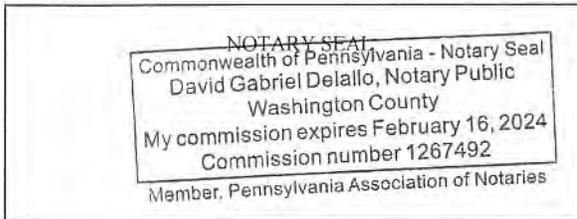

Subscribed and sworn before me this 21 day of JANUARY, 2021.

David Gabriel Delallo Notary Public

My Commission Expires 2/16/24

Oil and Gas Privacy Notice:

The Office of Oil and Gas processes your personal information, such as name, address and telephone number, as part of our regulatory duties. Your personal information may be disclosed to other State agencies or third parties in the normal course of business or as needed to comply with statutory or regulatory requirements, including Freedom of Information Act requests. Our office will appropriately secure your personal information. If you have any questions about our use or your personal information, please contact DEP's Chief Privacy Officer at depprivacyofficer@wv.gov.

RECEIVED
Office of Oil and Gas
JAN 25 2021
WV Department of
Environmental Protection

WW-6A
(9-13)

4705102367

API NO. 47-051 -
OPERATOR WELL NO. Van Winkle N-7HM
Well Pad Name: Hunter Pethtel

STATE OF WEST VIRGINIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS
NOTICE OF APPLICATION

Notice Time Requirement: notice shall be provided no later than the filing date of permit application.

Date of Notice: 1/26/2021 Date Permit Application Filed: 1/22/2021

Notice of:

- [X] PERMIT FOR ANY WELL WORK [] CERTIFICATE OF APPROVAL FOR THE CONSTRUCTION OF AN IMPOUNDMENT OR PIT

Delivery method pursuant to West Virginia Code § 22-6A-10(b)

- [] PERSONAL SERVICE [] REGISTERED MAIL [X] METHOD OF DELIVERY THAT REQUIRES A RECEIPT OR SIGNATURE CONFIRMATION

Pursuant to W. Va. Code § 22-6A-10(b) no later than the filing date of the application, the applicant for a permit for any well work or for a certificate of approval for the construction of an impoundment or pit as required by this article shall deliver, by personal service or by registered mail or by any method of delivery that requires a receipt or signature confirmation, copies of the application, the erosion and sediment control plan required by section seven of this article, and the well plat to each of the following persons: (1) The owners of record of the surface of the tract on which the well is or is proposed to be located; (2) The owners of record of the surface tract or tracts overlying the oil and gas leasehold being developed by the proposed well work, if the surface tract is to be used for roads or other land disturbance as described in the erosion and sediment control plan submitted pursuant to subsection (c), section seven of this article; (3) The coal owner, operator or lessee, in the event the tract of land on which the well proposed to be drilled is located [sic] is known to be underlain by one or more coal seams; (4) The owners of record of the surface tract or tracts overlying the oil and gas leasehold being developed by the proposed well work, if the surface tract is to be used for the placement, construction, enlargement, alteration, repair, removal or abandonment of any impoundment or pit as described in section nine of this article; (5) Any surface owner or water purveyor who is known to the applicant to have a water well, spring or water supply source located within one thousand five hundred feet of the center of the well pad which is used to provide water for consumption by humans or domestic animals; and (6) The operator of any natural gas storage field within which the proposed well work activity is to take place. (c)(1) If more than three tenants in common or other co-owners of interests described in subsection (b) of this section hold interests in the lands, the applicant may serve the documents required upon the person described in the records of the sheriff required to be maintained pursuant to section eight, article one, chapter eleven-a of this code. (2) Notwithstanding any provision of this article to the contrary, notice to a lien holder is not notice to a landowner, unless the lien holder is the landowner. W. Va. Code R. § 35-8-5.7.a requires, in part, that the operator shall also provide the Well Site Safety Plan ("WSSP") to the surface owner and any water purveyor or surface owner subject to notice and water testing as provided in section 15 of this rule.

[X] Application Notice [X] WSSP Notice [X] E&S Plan Notice [X] Well Plat Notice is hereby provided to:

[X] SURFACE OWNER(s)

Name: Xcl Midstream Operating, LLC (Well Pad & Access Road)
Address: 380 Southpointe Boulevard, Plaza II, Suite 215
Canonsburg, PA 15317

Name: Frank E. & Mary Virginia Pethtel, Life Estate (Well Pad)
Address: 9845 Fish Creek Road
Glen Easton, WV 26039

[X] SURFACE OWNER(s) (Road and/or Other Disturbance)

Name: Regina M. & Aaron D. Murray, Remainderman
Address: 5 Mound Manor
St. Mary's, WV 26170

Name: _____
Address: _____

[] SURFACE OWNER(s) (Impoundments or Pits)

Name: _____
Address: _____

[X] COAL OWNER OR LESSEE

Name: CNX Land, LLC
Address: 1000 Consol Energy Drive
Canonsburg, PA 15317

[] COAL OPERATOR

Name: _____
Address: _____
WV Department of Environmental Protection

[X] SURFACE OWNER OF WATER WELL AND/OR WATER PURVEYOR(s)

Name: *See attached
Address: _____

[] OPERATOR OF ANY NATURAL GAS STORAGE FIELD

Name: _____
Address: _____

*Please attach additional forms if necessary

RECEIVED
Office of Oil and Gas
FEB 03 2021

03/12/2021

Notice is hereby given:

Pursuant to West Virginia Code § 22-6A-10(b), notice is hereby given that the undersigned well operator has applied for a permit for well work or for a certificate of approval for the construction of an impoundment or pit.

This Notice Shall Include:

Pursuant to W. Va. Code § 22-6A-10(b), this notice shall include: (1) copies of the application; (2) the erosion and sediment control plan required by section seven of this article; and (3) the well plat.

Pursuant to W. Va. Code § 22-6A-10(f), this notice shall include: (1) a statement of the time limits for filing written comments; (2) who may file written comments; (3) the name and address of the secretary for the purpose of filing the comments and obtaining additional information; and (4) a statement that the persons may request, at the time of submitting written comments, notice of the permit decision and a list of persons qualified to test water.

Pursuant to W. Va. Code R. § 35-8-5.7.a, the operator shall provide the Well Site Safety Plan to the surface owner and any water purveyor or surface owner subject to notice and water testing as provided in section 15 of this rule.

Pursuant to W. Va. Code R. § 35-8-15.2.c, this notice shall: (1) contain a statement of the surface owner's and water purveyor's right to request sampling and analysis; (2) advise the surface owner and water purveyor of the rebuttable presumption for contamination or deprivation of a fresh water source or supply; advise the surface owner and water purveyor that refusal to allow the operator to conduct a pre-drilling water well test constitutes a method to rebut the presumption of liability; (3) advise the surface owner and water purveyor of his or her independent right to sample and analyze any water supply at his or her own expense; advise the surface owner and water purveyor whether or not the operator will utilize an independent laboratory to analyze any sample; and (4) advise the surface owner and water purveyor that he or she can obtain from the Chief a list of water testing laboratories in the subject area capable of and qualified to test water supplies in accordance with standard acceptable methods.

Additional information related to horizontal drilling may be obtained from the Secretary, at the WV Department of Environmental Protection headquarters, located at 601 57th Street, SE, Charleston, WV 25304 (304-926-0450) or by visiting www.dep.wv.gov/oil-and-gas/pages/default.aspx.

Well Location Restrictions

Pursuant to W. Va. Code § 22-6A-12, Wells may not be drilled within two hundred fifty feet measured horizontally from any existing water well or developed spring used for human or domestic animal consumption. The center of well pads may not be located within six hundred twenty-five feet of an occupied dwelling structure, or a building two thousand five hundred square feet or larger used to house or shelter dairy cattle or poultry husbandry. This limitation is applicable to those wells, developed springs, dwellings or agricultural buildings that existed on the date a notice to the surface owner of planned entry for surveying or staking as provided in section ten of this article or a notice of intent to drill a horizontal well as provided in subsection (b), section sixteen of this article was provided, whichever occurs first, and to any dwelling under construction prior to that date. This limitation may be waived by written consent of the surface owner transmitted to the department and recorded in the real property records maintained by the clerk of the county commission for the county in which such property is located. Furthermore, the well operator may be granted a variance by the secretary from these distance restrictions upon submission of a plan which identifies the sufficient measures, facilities or practices to be employed during well site construction, drilling and operations. The variance, if granted, shall include terms and conditions the department requires to ensure the safety and protection of affected persons and property. The terms and conditions may include insurance, bonding and indemnification, as well as technical requirements. (b) No well pad may be prepared or well drilled within one hundred feet measured horizontally from any perennial stream, natural or artificial lake, pond or reservoir, or a wetland, or within three hundred feet of a naturally reproducing trout stream. No well pad may be located within one thousand feet of a surface or ground water intake of a public water supply. The distance from the public water supply as identified by the department shall be measured as follows: (1) For a surface water intake on a lake or reservoir, the distance shall be measured from the boundary of the lake or reservoir. (2) For a surface water intake on a flowing stream, the distance shall be measured from a semicircular radius extending upstream of the surface water intake. (3) For a groundwater source, the distance shall be measured from the wellhead or spring. The department may, in its discretion, waive these distance restrictions upon submission of a plan identifying sufficient measures, facilities or practices to be employed during well site construction, drilling and operations to protect the waters of the state. A waiver, if granted, shall impose any permit conditions as the secretary considers necessary. (c) Notwithstanding the foregoing provisions of this section, nothing contained in this section prevents an operator from conducting the activities permitted or authorized by a Clean Water Act Section 404 permit or other approval from the United States Army Corps of Engineers within any waters of the state or within the restricted areas referenced in this section. (d) The well location restrictions set forth in this section shall not apply to any well on a multiple well pad if at least one of the wells was permitted prior to the effective date of this article. (e) The secretary shall, by December 31, 2012, report to the Legislature on the noise, light, dust and volatile organic compounds generated by the drilling of horizontal wells as they relate to the well location restrictions regarding occupied dwelling structures pursuant to this section. Upon a finding, if any, by the secretary that the well location restrictions regarding occupied dwelling structures are inadequate or otherwise require alteration to address the items

WW-6A
(8-13)

API NO. 47-051 - _____
OPERATOR WELL NO. Van Winkle N-7HM
Well Pad Name: Hunter Pethel

examined in the study required by this subsection, the secretary shall have the authority to propose for promulgation legislative rules establishing guidelines and procedures regarding reasonable levels of noise, light, dust and volatile organic compounds relating to drilling horizontal wells, including reasonable means of mitigating such factors, if necessary.

Water Well Testing:

Pursuant to West Virginia Code § 22-6A-10(d), notification shall be made, with respect to surface landowners identified in subsection (b) or water purveyors identified in subdivision (5), subsection (b) of this section, of the opportunity for testing their water well. The operator shall provide an analysis to such surface landowner or water purveyor at their request.

Water Testing Laboratories:

Pursuant to West Virginia Code § 22-6A-10(i), persons entitled to notice pursuant to subsection (b) of this section may contact the department to ascertain the names and locations of water testing laboratories in the subject area capable and qualified to test water supplies in accordance with standard accepted methods. In compiling that list of names the department shall consult with the state Bureau for Public Health and local health departments. A surface owner and water purveyor has an independent right to sample and analyze any water supply at his or her own expense. The laboratory utilized by the operator shall be approved by the agency as being certified and capable of performing sample analyses in accordance with this section.

Rebuttable Presumption for Contamination or Deprivation of a Fresh Water Source or Supply:

W. Va. Code § 22-6A-18 requires that (b) unless rebutted by one of the defenses established in subsection (c) of this section, in any action for contamination or deprivation of a fresh water source or supply within one thousand five hundred feet of the center of the well pad for horizontal well, there is a rebuttable presumption that the drilling and the oil or gas well or either was the proximate cause of the contamination or deprivation of the fresh water source or supply. (c) In order to rebut the presumption of liability established in subsection (b) of this section, the operator must prove by a preponderance of the evidence one of the following defenses: (1) The pollution existed prior to the drilling or alteration activity as determined by a predrilling or prealteration water well test. (2) The landowner or water purveyor refused to allow the operator access to the property to conduct a predrilling or prealteration water well test. (3) The water supply is not within one thousand five hundred feet of the well. (4) The pollution occurred more than six months after completion of drilling or alteration activities. (5) The pollution occurred as the result of some cause other than the drilling or alteration activity. (d) Any operator electing to preserve its defenses under subdivision (1), subsection (c) of this section shall retain the services of an independent certified laboratory to conduct the predrilling or prealteration water well test. A copy of the results of the test shall be submitted to the department and the surface owner or water purveyor in a manner prescribed by the secretary. (e) Any operator shall replace the water supply of an owner of interest in real property who obtains all or part of that owner's supply of water for domestic, agricultural, industrial or other legitimate use from an underground or surface source with a comparable water supply where the secretary determines that the water supply has been affected by contamination, diminution or interruption proximately caused by the oil or gas operation, unless waived in writing by that owner. (f) The secretary may order the operator conducting the oil or gas operation to: (1) Provide an emergency drinking water supply within twenty-four hours; (2) Provide temporary water supply within seventy-two hours; (3) Within thirty days begin activities to establish a permanent water supply or submit a proposal to the secretary outlining the measures and timetables to be used in establishing a permanent supply. The total time in providing a permanent water supply may not exceed two years. If the operator demonstrates that providing a permanent replacement water supply cannot be completed within two years, the secretary may extend the time frame on case-by-case basis; and (4) Pay all reasonable costs incurred by the real property owner in securing a water supply. (g) A person as described in subsection (b) of this section aggrieved under the provisions of subsections (b), (e) or (f) of this section may seek relief in court... (i) Notwithstanding the denial of the operator of responsibility for the damage to the real property owner's water supply or the status of any appeal on determination of liability for the damage to the real property owner's water supply, the operator may not discontinue providing the required water service until authorized to do so by the secretary or a court of competent jurisdiction.

Written Comment:

Pursuant to West Virginia Code § 22-6A-11(a), all persons described in subsection (b), section ten of this article may file written comments with the secretary as to the location or construction of the applicant's proposed well work within thirty days after the application is filed with the secretary. All persons described in West Virginia Code § 22-6A-10(b) may file written comments as to the location or construction of the applicant's proposed well work to the Secretary at:

Chief, Office of Oil and Gas
Department of Environmental Protection
601 57th St. SE
Charleston, WV 25304
(304) 926-0450

RECEIVED
Office of Oil and Gas

FEB 03 2021

WV Department of
Environmental Protection

Such persons may request, at the time of submitting written comments, notice of the permit decision and a list of persons qualified to test water. **NOTE: YOU ARE NOT REQUIRED TO FILE ANY COMMENT.**

03/12/2021

Time Limits and Methods for Filing Comments.

The law requires these materials to be served on or before the date the operator files its Application. You have **THIRTY (30) DAYS** after the filing date to file your comments. Comments must be filed in person or received in the mail by the Chief's office by the time stated above. You may call the Chief's office to be sure of the date. Check with your postmaster to ensure adequate delivery time or to arrange special expedited handling. If you have been contacted by the well operator and you have signed a "voluntary statement of no objection" to the planned work described in these materials, then the permit may be issued at any time.

Pursuant to West Virginia Code § 22-6A-11(c)(2), Any objections of the affected coal operators and coal seam owners and lessees shall be addressed through the processes and procedures that exist under sections fifteen, seventeen and forty, article six of this chapter, as applicable and as incorporated into this article by section five of this article. The written comments filed by the parties entitled to notice under subdivisions (1), (2), (4), (5) and (6), subsection (b), section ten of this article shall be considered by the secretary in the permit issuance process, but the parties are not entitled to participate in the processes and proceedings that exist under sections fifteen, seventeen or forty, article six of this chapter, as applicable and as incorporated into this article by section five of this article.

Comment Requirements

Your comments must be in writing and include your name, address and telephone number, the well operator's name and well number and the approximate location of the proposed well site including district and county from the application. You may add other documents, such as sketches, maps or photographs to support your comments.

Disclaimer: All comments received will be placed on our web site <http://www.dep.wv.gov/oil-and-gas/Horizontal-Permits/Pages/default.aspx> and the applicant will automatically be forwarded an email notice that such comments have been submitted. The applicant will be expected to provide a response to comments submitted by any surface owner, water purveyor or natural gas storage operator noticed within the application.

Permit Denial or Condition

The Chief has the power to deny or condition a well work permit. Pursuant to West Virginia Code § 22-6A-8(d), the permit may not be issued or be conditioned, including conditions with respect to the location of the well and access roads prior to issuance if the director determines that:

- (1) The proposed well work will constitute a hazard to the safety of persons;
- (2) The plan for soil erosion and sediment control is not adequate or effective;
- (3) Damage would occur to publicly owned lands or resources; or
- (4) The proposed well work fails to protect fresh water sources or supplies.

A permit may also be denied under West Virginia Code § 22-6A-7(k), the secretary shall deny the issuance of a permit if the secretary determines that the applicant has committed a substantial violation of a previously issued permit for a horizontal well, including the applicable erosion and sediment control plan associated with the previously issued permit, or a substantial violation of one or more of the rules promulgated under this article, and in each instance has failed to abate or seek review of the violation within the time prescribed by the secretary pursuant to the provisions of subdivisions (1) and (2), subsection (a), section five of this article and the rules promulgated hereunder, which time may not be unreasonable.

Pursuant to West Virginia Code § 22-6A-10(g), any person entitled to submit written comments to the secretary pursuant to subsection (a), section eleven of this article, shall also be entitled to receive from the secretary a copy of the permit as issued or a copy of the order modifying or denying the permit if the person requests receipt of them as a part of the written comments submitted concerning the permit application. Such persons may request, at the time of submitting written comments, notice of the permit decision and a list of persons qualified to test water.

RECEIVED
Office of Oil and Gas
FEB 03 2021
WV Department of
Environmental Protection

03/12/2021

WW-6A
(8-13)

4705102367

API NO. 47-051 -
OPERATOR WELL NO. Van Winkle N-7HM
Well Pad Name: Hunter Pethel


Notice is hereby given by:

Well Operator: Tug Hill Operating, LLC
Telephone: 724-749-8388
Email: amorris@tug-hilltop.com *any Klovic*

Address: 380 Southpointe Boulevard, Plaza II, Suite 200
Canonsburg, PA 15317
Facsimile: 724-338-2030

Oil and Gas Privacy Notice:

The Office of Oil and Gas processes your personal information, such as name, address and telephone number, as part of our regulatory duties. Your personal information may be disclosed to other State agencies or third parties in the normal course of business or as needed to comply with statutory or regulatory requirements, including Freedom of Information Act requests. Our office will appropriately secure your personal information. If you have any questions about our use or your personal information, please contact DEP's Chief Privacy Officer at depprivacyofficer@wv.gov.

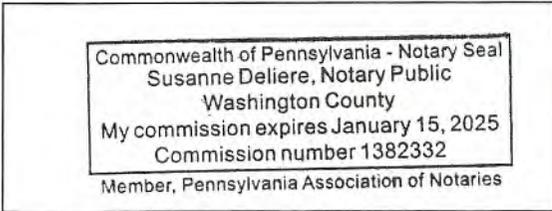

Subscribed and sworn before me this 26th day of January 2021.
Susanne Deliere Notary Public
My Commission Expires 1/15/2025

RECEIVED
Office of Oil and Gas
FEB 03 2021
WV Department of
Environmental Protection

03/12/2021

Exhibit WW-6A

Tug Hill Operating, LLC
380 Southpointe Blvd, Suite 200
Cannonsburg, PA 15137

Residences within Two-Thousand Feet (2,000')

Well: Van Winkle N – 7HM
District: Meade
State: WV

There are four (4) possible residences, one (1) possible commercial or business site, no churches, no schools and no emergency facilities within two-thousand feet (2,000') of the above referenced well location. Number 6 is a water well only and is not a residence.

<p>Residence (#1) TM 13 Pcl. 6 Mary Virginia Pethtel Phone: 304-684-2646, 304-845-3423 Physical Address: None Found – Possible Mobile Home Tax Address: 9845 Fish Creek Rd Glen Easton, WV 26039</p>	<p>Residence (#2) TM 13 Pcl. 7 Mary Virginia Pethtel Phone: 304-684-2646, 304-845-3423 Physical Address: 9845 Fish Creek Rd Glen Easton, WV 26039 Tax Address: Same</p>	<p>Commercial/Business (#3)* TM 13 Pcl. 5 XcL Midstream Operating, LLC Phone: 1-888-751-0434 Physical Address: 9269 Fish Creek Rd. Glen Easton, WV 26039 Tax Address: 1320 S University DR STE 500 Fort Worth, TX 76107 *Physical address appears to be related to Oil & Gas Well Pad.</p>
<p>Residence (#4) TM 13 Pcl. 5 XcL Midstream Operating, LLC Phone: 1-888-751-0434 Physical Address: None Found – Appears to be newer home Tax Address: 1320 S University DR STE 500 Fort Worth, TX 76107</p>	<p>Residence (#5) TM 13 Pcl. 5 XcL Midstream Operating, LLC Phone: 1-888-751-0434 Physical Address: 9201 Fish Creek Rd. Glen Easton, WV 26039 Tax Address: 1320 S University DR STE 500 Fort Worth, TX 76107</p>	<p>(#6) Water Well Only (No Residence) Joseph L. Blake & Michael A. Walker 1207 Roberts Ridge Rd. Moundsville, WV 26041</p>


RECEIVED
Office of Oil and Gas

FEB 03 2021

WV Department of
Environmental Protection

03/12/2021

PROPOSED VAN WINKLE N - 7HM 4705102367

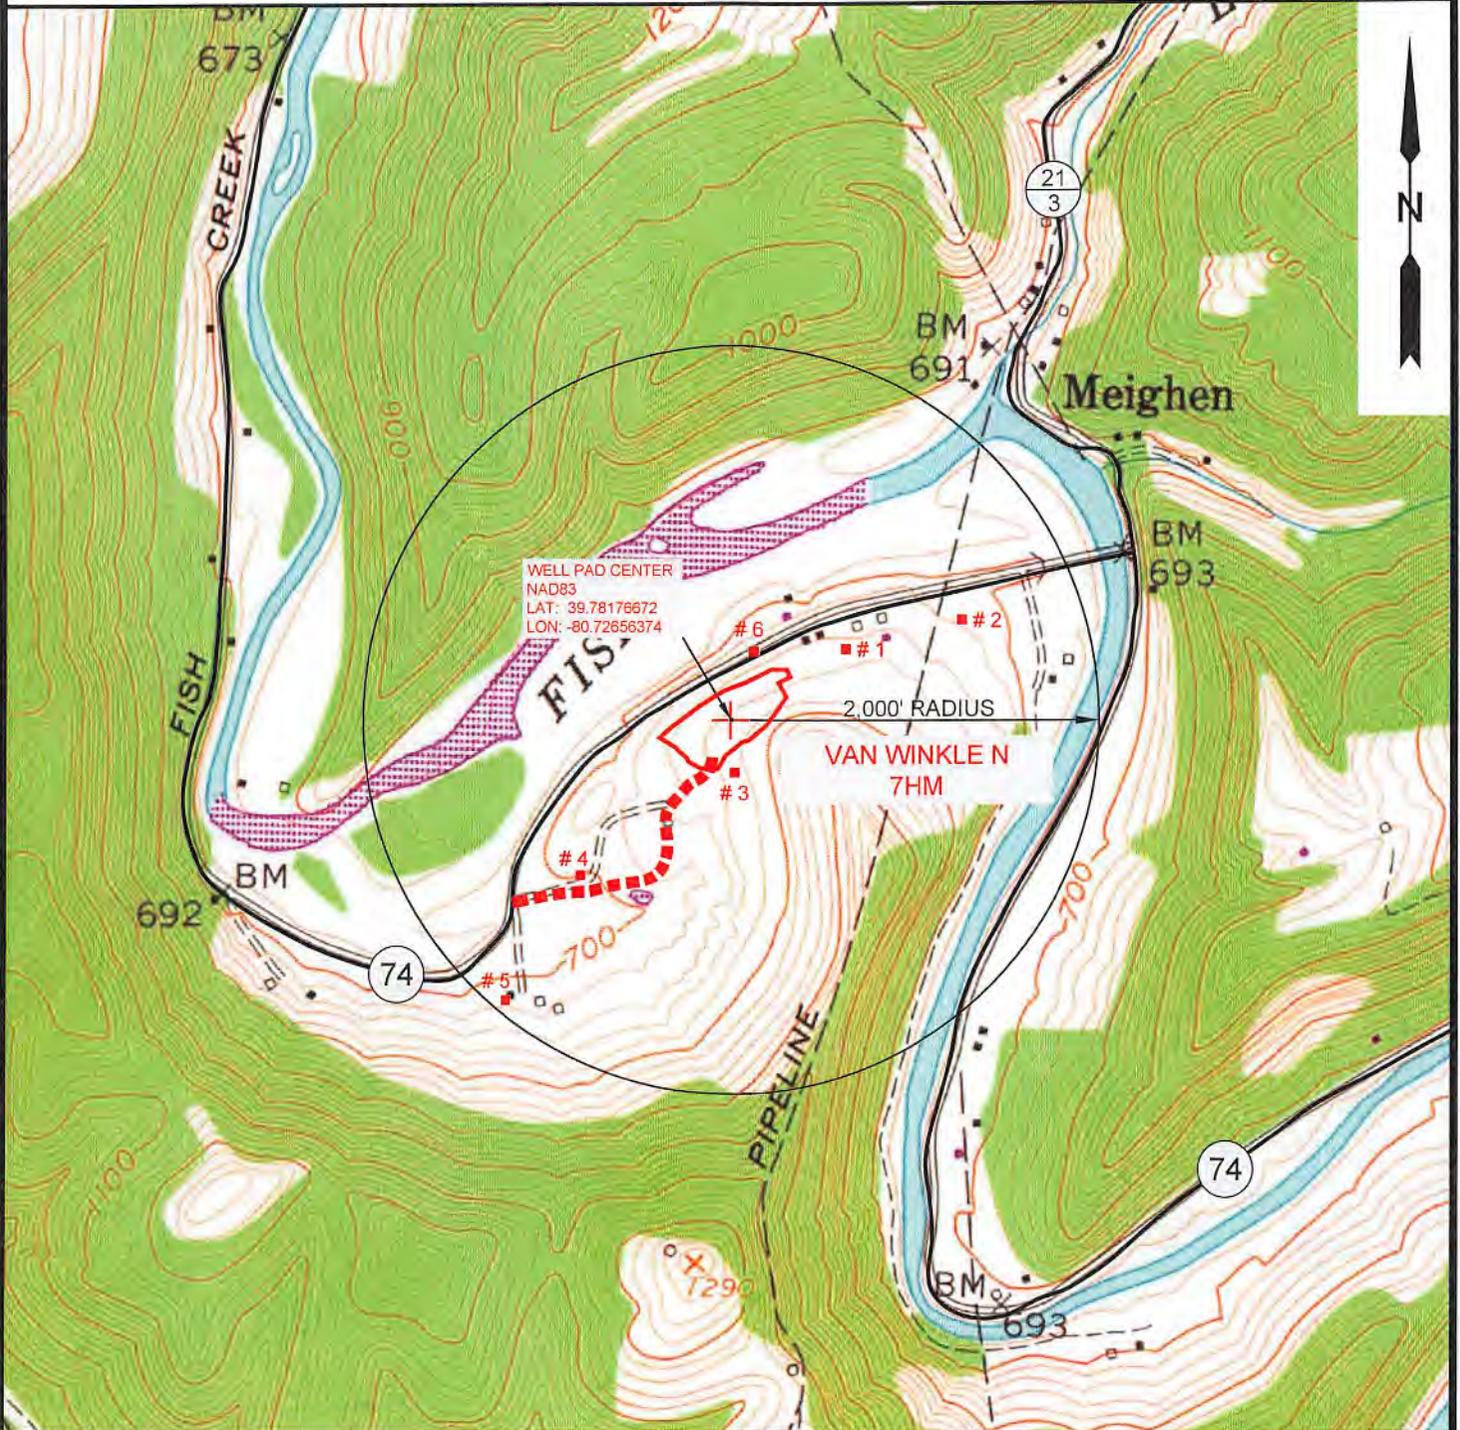

NOTE: THERE APPEARS TO BE SIX (6) POSSIBLE WATER SOURCES WITHIN 2,000'. NUMBER 6 IS A WATER WELL ONLY (NO RESIDENCE).

 12 Vanhorn Drive P.O. Box 150 Glenville, WV 26351 304.462.5634 1412 Kanawha Boulevard, East Charleston, WV 25301 304.346.3952 254 East Beckley Bypass Beckley, WV 25801 304.255.5296 slsvw.com	TOPO SECTION:		OPERATOR:	
	GLEN EASTON 7.5'		PREPARED FOR: TUG HILL OPERATING, LLC 380 SOUTHPOINTE BLVD SUITE 200 CANONSBURG, PA 15317	
	COUNTY	DISTRICT		
	MARSHALL	MEADE		
DRAWN BY	JOB NO.	DATE	SCALE	
K.G.M.	8952	12/24/2020	1" = 1000'	
			03/12/2021	

STATE OF WEST VIRGINIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS
NOTICE OF ENTRY FOR PLAT SURVEY

Notice Time Requirement: Notice shall be provided at least **SEVEN (7)** days but no more than **FORTY-FIVE (45)** days prior to entry

Date of Notice: 12/11/2020 **Date of Planned Entry:** 12/18/2020

Delivery method pursuant to West Virginia Code § 22-6A-10a

- PERSONAL SERVICE REGISTERED MAIL METHOD OF DELIVERY THAT REQUIRES A RECEIPT OR SIGNATURE CONFIRMATION

Pursuant to West Virginia Code § 22-6A-10(a), Prior to filing a permit application, the operator shall provide notice of planned entry on to the surface tract to conduct any plat surveys required pursuant to this article. Such notice shall be provided at least seven days but no more than forty-five days prior to such entry to: (1) The surface owner of such tract; (2) to any owner or lessee of coal seams beneath such tract that has filed a declaration pursuant to section thirty-six, article six, chapter twenty-two of this code; and (3) any owner of minerals underlying such tract in the county tax records. The notice shall include a statement that copies of the state Erosion and Sediment Control Manual and the statutes and rules related to oil and gas exploration and production may be obtained from the Secretary, which statement shall include contact information, including the address for a web page on the Secretary's web site, to enable the surface owner to obtain copies from the secretary.

Notice is hereby provided to:

SURFACE OWNER(S)

Name: Xcl Midstream Operating, LLC(Well Pad & Access Road)
 Address: 380 Southpointe Boulevard, Plaza II, Suite 215
Canonsburg, PA 15317

Name: Frank E. & Mary Virginia Pethtel, Life Estate (Well Pad)
 Address: 9845 Fish Creek Road
Glen Easton, WV 26039

Name: Regina M. & Aaron D. Murray, Remainderman
 Address: 5 Mound Manor
St. Marys, WV 26170

COAL OWNER OR LESSEE

Name: CNX Land, LLC
 Address: 1000 Consol Energy Drive
Canonsburg, PA 15317

MINERAL OWNER(S)

Name: Frank E. & Mary Virginia Pethtel, Life Estate
 Address: 9845 Fish Creek Road
Glen Easton, WV 26039 **See attached list
 *please attach additional forms if necessary

Notice is hereby given:

Pursuant to West Virginia Code § 22-6A-10(a), notice is hereby given that the undersigned well operator is planning entry to conduct a plat survey on the tract of land as follows:

State: West Virginia
 County: Marshall
 District: Meade
 Quadrangle: Glen Easton 7.5'

Approx. Latitude & Longitude: 39.78176850; -80.72661368
 Public Road Access: County Route 74
 Watershed: Middle Fish Creek
 Generally used farm name: Xcl Midstream Operating, LLC

Copies of the state Erosion and Sediment Control Manual and the statutes and rules related to oil and gas exploration and production may be obtained from the Secretary, at the WV Department of Environmental Protection headquarters, located at 601 57th Street, SE, Charleston, WV 25304 (304-926-0450). Copies of such documents or additional information related to horizontal drilling may be obtained from the Secretary by visiting www.dep.wv.gov/oil-and-gas/pages/default.aspx.

Notice is hereby given by:

Well Operator: Tug Hill Operating, LLC
 Telephone: 724-749-8388
 Email: amorris@tug-hill-op.com

Address: 380 Southpointe Boulevard, Plaza II, Suite 200
Canonsburg, PA 15317
 Facsimile: 724-338-2020

RECEIVED
Office of Oil and Gas

JAN 25 2021

WV Department of
Environmental Protection

Oil and Gas Privacy Notice:

The Office of Oil and Gas processes your personal information, such as name, address and telephone number, as part of our regulatory duties. Your personal information may be disclosed to other State agencies or third parties in the normal course of business or as needed to comply with statutory or regulatory requirements, including Freedom of Information Act requests. Our office will appropriately secure your personal information. If you have any questions about our use or your personal information, please contact DEP's Chief Privacy Officer at depprivacyofficer@wv.gov.

03/12/2021

4705102367

WW-6A3 Notice of Entry for Plat Survey
Additional Parties to Notice
Van Winkle Wells

Additional Mineral Owner:
Dennis W. Hunter
3322 Rainbow Lane
North Ft. Myers, FL 33903



RECEIVED
Office of Oil and Gas
JAN 25 2021
WV Department of
Environmental Protection

03/12/2021

STATE OF WEST VIRGINIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS
NOTICE OF PLANNED OPERATION

Notice Time Requirement: notice shall be provided no later than the **filing date of permit application.**

Date of Notice: 01/22/2021 **Date Permit Application Filed:** 01/22/2021

Delivery method pursuant to West Virginia Code § 22-6A-16(c)

- CERTIFIED MAIL
RETURN RECEIPT REQUESTED
- HAND
DELIVERY

Pursuant to W. Va. Code § 22-6A-16(c), no later than the date for filing the permit application, an operator shall, by certified mail return receipt requested or hand delivery, give the surface owner whose land will be used for the drilling of a horizontal well notice of the planned operation. The notice required by this subsection shall include: (1) A copy of this code section; (2) The information required to be provided by subsection (b), section ten of this article to a surface owner whose land will be used in conjunction with the drilling of a horizontal well; and (3) A proposed surface use and compensation agreement containing an offer of compensation for damages to the surface affected by oil and gas operations to the extent the damages are compensable under article six-b of this chapter. (d) The notices required by this section shall be given to the surface owner at the address listed in the records of the sheriff at the time of notice.

Notice is hereby provided to the SURFACE OWNER(s)

(at the address listed in the records of the sheriff at the time of notice):

Name: XcL Midstream Operating, LLC
Address: 380 Southpointe Boulevard, Plaza II, Suite 200
Canonsburg, PA 15317

Name: Frank E. & Mary Virginia Pethtel (Life Estate)
Address: 9845 Fish Creek Road
Glen Easton, WV 26039

Notice is hereby given:

Pursuant to West Virginia Code § 22-6A-16(c), notice is hereby given that the undersigned well operator has developed a planned operation on the surface owner's land for the purpose of drilling a horizontal well on the tract of land as follows:

State:	West Virginia	UTM NAD 83 Easting:	523,446.10
County:	Marshall	Northing:	4,403,590.50
District:	Meade	Public Road Access:	County Route 74
Quadrangle:	Glen Easton 7.5'	Generally used farm name:	XcL Midstream Operating, LLC
Watershed:	Fish Creek (HUC 10)		

This Notice Shall Include:

Pursuant to West Virginia Code § 22-6A-16(c), this notice shall include: (1) A copy of this code section; (2) The information required to be provided by **W. Va. Code § 22-6A-10(b)** to a surface owner whose land will be used in conjunction with the drilling of a horizontal well; and (3) A proposed surface use and compensation agreement containing an offer of compensation for damages to the surface affected by oil and gas operations to the extent the damages are compensable under article six-b of this chapter. Additional information related to horizontal drilling may be obtained from the Secretary, at the WV Department of Environmental Protection headquarters, located at 601 57th Street, SE, Charleston, WV 25304 (304-926-0450) or by visiting www.dep.wv.gov/oil-and-gas/pages/default.aspx.

Well Operator: Tug Hill Operating, LLC
Telephone: 724-749-8388
Email: amorris@tug-hillop.com

Address: 380 Southpointe Boulevard, Plaza II, Suite 200
Canonsburg, PA 15317
Facsimile: 724-338-2030

Oil and Gas Privacy Notice:

The Office of Oil and Gas processes your personal information, such as name, address and telephone number, as part of our regulatory duties. Your personal information may be disclosed to other State agencies or third parties in the normal course of business or as needed to comply with statutory or regulatory requirements, including Freedom of Information Act requests. Our office will appropriately secure your personal information. If you have any questions about our use of your personal information, please contact DEP's Chief Privacy Officer at depprivacyofficer@wv.gov.

RECEIVED
Office of Oil and Gas
JAN 25 2021
03/12/2021
WV Department of
Environmental Protection

**Additional Surface Owner – Van Winkle Wells
WW-6A5**

Regina M. & Aaron D. Murray
5 Mound Manor
St. Marys, WV 26170



RECEIVED
Office of Oil and Gas
JAN 25 2021
03/12/2021
WV Department of
Environmental Protection



WEST VIRGINIA DEPARTMENT OF TRANSPORTATION
Division of Highways

1900 Kanawha Boulevard East • Building Five • Room 110
 Charleston, West Virginia 25305-0430 • (304) 558-3505

Byrd E. White, III
 Secretary of Transportation/
 Commissioner of Highways

January 20, 2021

Jimmy Wriston, P. E.
 Deputy Secretary/
 Deputy Commissioner

James A. Martin, Chief
 Office of Oil and Gas
 Department of Environmental Protection
 601 57th Street, SE
 Charleston, WV 25304

Subject: DOH Permit for the Hunter-Pethtel Pad, Marshall County
 Van Winkle N-7HM Well Site

Dear Mr. Martin,

This well site will be accessed from a DOH permit #06-2009-0275 which has been transferred to Tug Hill Operating for access to the State Road for a well site located off Marshall County Route 74 SLS.

This operator is in compliance with §22-6A-20 of the WV Code. Operator has signed a DISTRICT WIDE OIL AND GAS ROAD MAINTENANCE BONDING AGREEMENT and provided the required Bond. This operator is currently in compliance with the DOH OIL AND GAS POLICY dated October 1, 2018. This letter is valid for permitting purposes for one year from this letter's date.

Very Truly Yours,

Gary K. Clayton, P.E.
 Regional Maintenance Engineer
 Central Office O&G Coordinator

Cc: Amy Morris
 Tug Hill Operating
 CH, OM, D-6
 File

RECEIVED
 Office of Oil and Gas

JAN 25 2021

03/12/2021
 Environmental Protection



TUG HILL

4705102367

PLANNED ADDITIVES TO BE USED IN FRACTURING OR STIMULATION

Van Winkle Wells

PRODUCT NAME:	CHEMICAL DESCRIPTION:	PRODUCT USE:	HAZARDOUS COMPONENT:
GBW-20C	Hemicellulase Breaker	Breaker - Water	None
ALPHA 1427		Biocide	Glutaraldehyde – CAS#000111-30-8 Quaternary ammonium chloride CAS# 007173-51-5 Alky dimethyl benzyl ammonium Chloride (C12-16) – CAS#068424-85-1 Ethanol – CAS# 000064-17-5 Water – CAS# 007732-18-5
FRAC SAND	Silica Sand (various Mesh sizes)	Proppant	Crystalline silica (quartz) CAS# 14808-60-7
S-8C, Sand	Silica Sand (100 mesh)	Sand	Silica – CAS# 14808-60-7
GW-3LDF		Gellant - Water	Petroleum Distillate Blend – Proprietary, (Not Associated with Diesel Fuel) Guar gum – CAS# 009000-30-0
FRW-18		Friction Reducer	Hydrotreated light distillate CAS# 064742-47-8
Scaletrol		Scale Inhibitor	Ethylene glycol – CAS# 000107-21-1 Diethylene glycol – CAS# 000111-46-6

RECEIVED
Office of Oil and Gas

JAN 25 2021


WV Department of
Environmental Protection

Hunter Pethel Well Site
Tug Hill Operating
Exhibit A: Final Design: Issue for Permitting

Xel Midstream
 Operating, LLC
 TM 13
 Parcel: 5

**APPROVED
 WVDEP OOG**
 2/24/2021

**APPROVED
 WVDEP OOG**
 2/24/2021

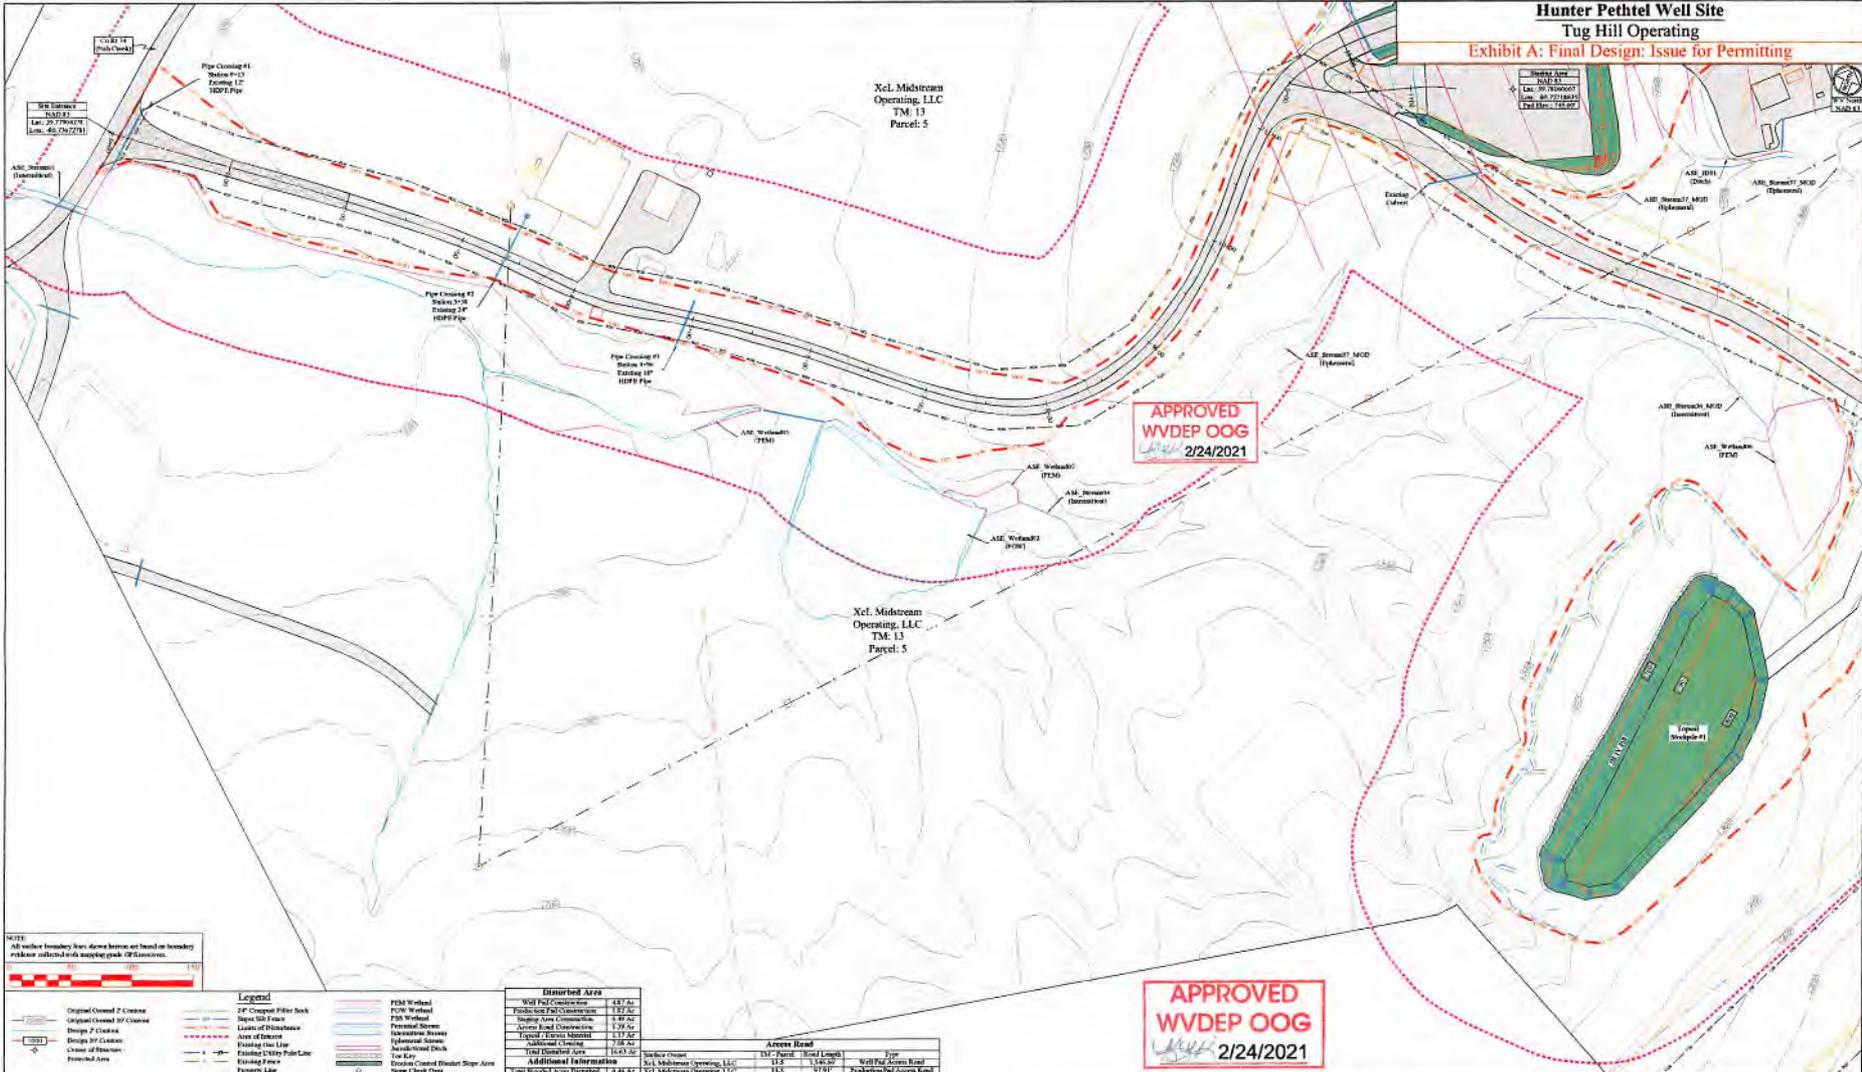

NOTE: All surface boundary lines shown herein are based on boundary markers indicated with mapping grade (IP) locations.



Legend


- Original Ground 2' Contour
- Original Ground 10' Contour
- Design 2' Contour
- Design 10' Contour
- Zone of Influence
- Proposed Area
- 2" Crimped Filter Sock
- 3" Crimped Filter Sock
- Line of Discharge
- Area of Interest
- Existing Utility Pole Line
- Existing Power
- Property Line
- 2" Crimped Filter Sock
- 3" Crimped Filter Sock
- Line of Discharge
- Area of Interest
- Existing Utility Pole Line
- Existing Power
- Property Line

Disturbed Area

Well Pad Construction	4.41 Ac
Production Pad Construction	1.27 Ac
Storage Area Construction	0.90 Ac
Access Road Construction	1.29 Ac
Exposed Earth Material	1.17 Ac
Additional Clearing	7.28 Ac
Total Disturbed Area	12.32 Ac

Acreage Breakdown

Entity	Acres	Percentage
Xel Midstream Operating, LLC	11.5	93.3%
Xel Midstream Operating, LLC	0.8	6.7%
Total	12.3	100%

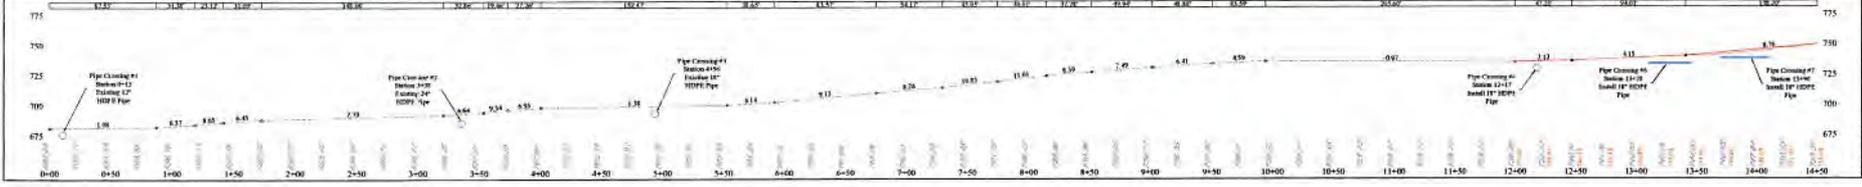

TUG HILL OPERATING
 THIS DOCUMENT PREPARED FOR TUG HILL OPERATING
 Kelleys
 Hunter Pethel Well Site
 Meade District
 Marshall County, WV
 Date: 12/04/2020
 Scale: As Shown
 Drawn by: ZS
 File No:
 Sheet 9 of 13

