

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE ST. MONONGAH WV 26554
Address
CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE ST. MONONGAH WV 26554
Address
MATTHEW D. STILES
Lease or Property Owner
427 REX RUN RD. MANNINGTON, WV 26582
Address

CONSOLIDATION COAL CO.
Name of Well Operator
1 BRIDGE ST. MONONGAH, WV 26554
Complete Address
GLOVER GAP 7.5'
Well Location
MANNINGTON
District
MARION
County
4460
Well No.
STILES, MATTHEW D.
Farm

STATE INSPECTOR SUPERVISING PLUGGING *William H. ...* 2-17-12

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

MIKE MITCHELL and KEVIN S. WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 10th day of January, 2012 and that the well was plugged in the following manner:

Sand or Zone Record	Filling Material	Plugs Used	Casing Pulled	Casing Left In
Formation		Size & Kind		
Cleaned 12 1/2" hole from the surface to 135'. Reduced hole to 9 7/8" at 135'. Cleaned 9 7/8" hole from 135' to top of 7" casing at 909'. Drilled cement plugs at the following depths; 620' to 630', 700' to 723' and 745' to 754'. Reduced hole to 6 1/2" at 909'. Cleaned 6 1/2" hole from 909' to 1042'. Tagged plug at 1042'. Removed 91' of 7" casing from 909' to 1000'. Left an unknown amount of 7" casing in the hole from 1000' to an unknown depth. Cleaned 9 7/8" hole through the Pittsburgh Coal 792' to 800'. Possible junk metal remaining through Pittsburgh Coal. Left 22' of 20" conductor pipe in the hole from 22' to surface.		20" Conductor 7" Casing	0' 91'	22' Unknown
Cemented hole from 1042' back to surface as follows: From 1042' to 692' with 175 sacks of Thixotropic Cement with green dye. From 692' to surface with 255 sacks of Econofill Cement. A total of 430 sacks of cement were used to fill the hole from 1042' to surface. Cement did circulate at the surface.				
Coal Seams		Description of Monument		
<u>PITTSBURGH</u>	<u>792' to 800'</u>	<u>77" of 7" casing w/company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to the cement plug at ground level.</u>		
(Name)				
(Name)				
(Name)				

... and that the work of plugging and filling said well was completed on the 1st day of February, 2012

And further deponents saith not.


Mike Mitchell
Mike Mitchell

Kevin S. Wright
Kevin S. Wright

Sworn to and subscribed before me this 16th day of February 2012

Jacqueline L. Shriver
Notary Public

My commission expires
March 18, 2020

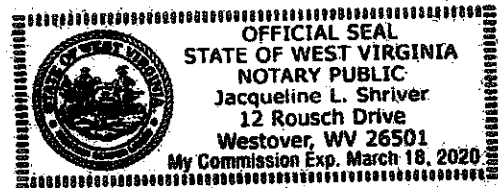

Permit No. 47-49-02197-P
Well No. 4460