

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE STREET MONONGAH, WV 26554
Address

CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE STREET MONONGAH, WV 26554
Address

JEFFERY MICHAEL
Lease or Property Owner
PO BOX 211 MANNINGTON, WV 26582
Address

CONSOLIDATION COAL CO.
Name of Well Operator
1 BRIDGE STREET MONONGAH, WV 26554
Complete Address

GLOVER GAP 7.5'
Well Location

MANNINGTON
District

MARION
County

5139
Well No.

MICHAEL, JEFFERY
Farm

STATE INSPECTOR SUPERVISING PLUGGING *William Woodruff* 3-6-13

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

ROBERT STEEL and KEVIN WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 21st day of January, 2013 and that the well was plugged in the following manner:

Sand or Zone Record	Filling Material	Casing/Tubing Size	Casing Pulled	Casing Left In
Formation				
Cleaned 12 1/4" hole from the surface to 212'. Reduced hole to 9 7/8". Cleaned 9 7/8" hole from 212' to 1156'. Cleaned 9 7/8" hole through the Pittsburgh Coal seam from 833' to 891'. Reduced hole to 7 7/8". Cleaned 7 7/8" hole from 1156' to 1483'. Tagged top of 7" casing at 1483'. Reduced hole to 6 1/2". Cleaned 6 1/2" hole from 1483 to 2217'. Left unknown amount of 7" casing in the hole from 1483' to unknown depth. Cut 7" casing at the following depths: 2117', 2017', 1917', 1817', 1717', 1617' and 1517'. 20' of 16" conductor casing was left in the hole from the surface to 20'.	16" Conductor 7" Casing	0' 0'	20' Unknown	
Cemented hole from 2217' back to surface as follows: From 2217' to 1091' with 175 sacks of Expandable Cement. From 1091' to 783' with 108 sacks of Thixotropic Cement with dye. From 783' to surface with 358 sacks of Expandable Cement. A total of 641 sacks of expandable cement was used to fill the hole from 217' to the surface. Cement did circulate at the surface.				
Coal Seams		Description of Monument		
<u>Pittsburgh</u>	<u>(883' - 891')</u>	77" of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to cement plug at ground level.		

RECEIVED
Office of Oil & Gas
MAR 06 2013
WV Department of
Environmental Protection

... and that the work of plugging and filling said well was completed on the 6th day of February, 2013

And further deponents saith not.


Robert Steel
Robert Steel

Kevin S. Wright
Kevin S. Wright

Sworn to and subscribed before me this 1st day of March 2013

Carol A. Mayhew
Notary Public

My commission expires: 9-12-2019

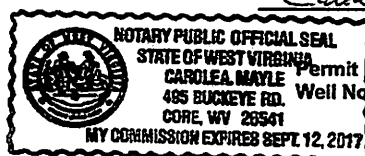

Permit No. 47-049-02248-P
Well No. 5139

03/08/2013