

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE ST. MONONGAH WV 26554
Address
CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE ST. MONONGAH WV 26554
Address
CONSOLIDATION COAL CO.
Lease or Property Owner
1 BRIDGE ST. MONONGAH, WV 26554
Address

CONSOLIDATION COAL CO.
Name of Well Operator
1 BRIDGE ST. MONONGAH, WV 26554
Complete Address
GLOVER GAP 7.5
Well Location
MANNINGTON
District
MARION
County
5124
Well No.
STRAIGHT, W.S. & JAS W.
Farm

STATE INSPECTOR SUPERVISING PLUGGING *Bill Henderson*
AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

ROGER MOORE and KEVIN S. WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 30th day of April, 2014 and that the well was plugged in the following manner:

Formation	Filling Material	Casing Size & Kind	Casing Pulled	Casing Left In
	Cleaned 12 1/2" hole from Surface to 234'. Reduced hole to 9 7/8". Cleaned 9 7/8" hole from 234' to 588'. Reduced hole to 7 7/8". Cleaned 7 7/8" hole from 588' to 1212'. Cleaned 7 7/8" hole through the Pittsburgh Coal seam from 992' to 998'. Reduced hole to 6 1/2". Cleaned 6 1/2" hole from 1212' to 1310'. Cemented hole from 1310' back to the surface as follows: From 1310' to 1199' with 53 sacks of Expandable Cement. From 1199' to 892' with 180 sacks of Thixotropic Cement with Green Dye. From 892' to Surface with 330 sacks of Expandable Cement. A total of 560 sacks of cement were used to cement the hole from 1310' back to the Surface. Cement did circulate at the Surface. Left 20' of 16" conductor casing in the hole from Surface to 20'.	16" Conductor	0'	20'
Coal Seams		Description of Monument		
<u>PITTSBURGH</u>	992' to 998'	77" of 7" casing w/company name, well number,		
(Name)		permit number and date cemented stated on 7"		
(Name)		casing. Well marker will be attached to the		
(Name)		cement plug at ground level.		

RECEIVED
Office of Oil and Gas
JUN 23 2014
WV Department of
Environmental Protection

... And that the work of plugging and filling said well was completed on the 19th day of May, 2014.

And further deponents saith not.


Roger Moore
Roger Moore
Kevin S. Wright
Kevin S. Wright

Sworn to and subscribed before me this 9th day of June 2014

Carol A. Mayle
Notary Public

My commission expires: 9-12-2017

Permit No. 47-49-02292-P
Well No. 5124

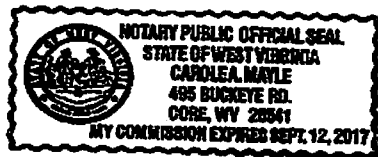

06/27/2017