

STATE OF WEST VIRGINIA
DEPARTMENT OF ENERGY
OIL AND GAS WELLS DIVISION

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL CO. – RIVER OPERATIONS

Coal Operator or Owner
RD. 4 BOX 425 MOUNDSVILLE, WV 26041
Address
CONSOLIDATION COAL CO. RIVER OPERATIONS
Coal Operator or Owner
RD. 4 BOX 425 MOUNDSVILLE, WV 26041
Address
LUTHER H.D. & DOROTHY J. WILSON
Lease or Property Owner
RD 1 BOX 119 DALLAS, WV 26041
Address

CONSOLIDATION COAL CO. – RIVER OPERATIONS

Name of Well Operator
RD. 4 BOX 425 MOUNDSVILLE, WV 26041
Complete Address
MAJORSVILLE, WV 7.5
Well Location
SANDHILL
District
MARSHALL
County
SGW-42
Well No.
WILSON, LUTHER H.D. & DOROTHY J.
Farm

STATE INSPECTOR SUPERVISING PLUGGING

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of **MONONGALIA** ss:

MARK WILSON and **KEVIN WRIGHT** being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 15th day of February, 2012 and that the well was plugged in the following manner:

Sand or Zone Record Formation	Filling Material	Plugs Used Size & Kind	Casing Pulled	Casing Left In	
<p>Cleaned 4 5/8" hole through existing 5 1/2" casing from the surface to 1339'. Tagged plug at 1339'. Original well record indicated that the 5 1/2" casing was cemented to surface. Ran cement bond log on the 5 1/2" casing to verify information from well record. Cement bond log indicated that the 5 1/2" casing was cemented to surface. Left 1325' of 5 1/2" casing in the hole from 1325' to surface. Cut remaining 5 1/2" casing at the following depths; 1272', 1172', 1150', 1080', 981', 881', 758' and 48'. Perforated 5 1/2" casing w/ 6 shots at each the following depths 1200', 1000', 900' and 800'. Cement bottom hole from 1339' to 829' with 75 sacks of Thixotropic Cement with a Gas Blocker additive. Sand cut 5 1/2", 8 5/8" and 10 3/4" casings at the following depths; 781', 722', 681', 631', 582', 579.5', 577', 574.5', 572', 523' and 423'. Cleaned 4 5/8" hole through Pittsburgh Coal (573' to 581'). 8 5/8" and 10 3/4" casing depths were taken from original well record. Left 20' of 16" conductor pipe in the hole from 20' to surface.</p> <p>Cemented hole from 1339' back to surface as follows: From 1339' to 829' with 75 sacks of Thixaropic Cement with a Gas Blocker additive. From 829' to surface with 115 sacks of Thixatropic Cement with green dye. A total of 190 sacks of cement were use to fill the hole from 1339' to surface. Cement did circulate at the surface.</p>		16" Conductor	0'	20'	
			10 3/4" Casing	0'	613'
			8 5/8" Casing	0'	1063'
			5 1/2" Casing	0	1325'
Coal Seams		Description of Monument			
Pittsburgh Coal	573' to 581'	77" of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing .Well marker will be attached to the cement plug at ground level.			
(Name)					
(Name)					
(Name)					

... and that the work of plugging and filling said well was completed on the 28th day of February 2012


And further deponents saith not.

Mark Wilson
Mark Wilson

Kevin S. Wright
Kevin S. Wright

Sworn to and subscribed before me this 30th day of March, 2012

Jacqueline L. Shriver
Notary Public

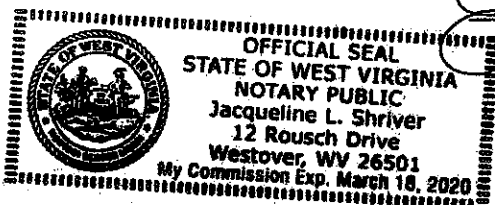

Permit No. 47-051-00641-P
Well No. SGW-42

My commission expires:
March 18, 2020

05/04/2012