

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

MCELROY COAL COMPANY
Coal Operator or Owner
RD.4 BOX 425 MOUNDSVILLE, WV 26041-9802
Address

MCELROY COAL COMPANY
Coal Operator or Owner
RD.4 BOX 425 MOUNDSVILLE, WV 26041-9802
Address

ROBERT D. MASTOWSKI
Lease or Property Owner
193 MT. TABOR ROAD CONNELLSVILLE, PA 15425
Address

MCELROY COAL COMPANY
Name of Well Operator
RD.4 BOX 425 MOUNDSVILLE, WV 26041-9802
Complete Address

CAMERON, WV 7.5'
Well Location
CAMERON
District
MARSHALL
County
M-1332
Well No.

MASTOWSKI, ROBERT D.
Farm

RECEIVED
Office of Oil & Gas

STATE INSPECTOR SUPERVISING PLUGGING *[Signature]*

DEC 21 2011

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

WV Department of
Environmental Protection

DAVID HARMAN and **KEVIN WRIGHT** being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 3rd day of September 2008 and that the well was plugged in the following manner:

Sand or Zone Record	Filling Material	Casing/Tubing Size	Casing Pulled	Casing Left In
Formation				
Removed 1315' of 7" casing from the surface to 1315'. Cleaned 12 1/4" hole from the surface to 285'. Cleaned 9 7/8" hole from 285' to 626'. Cleaned 7 7/8" hole from 626' to 1315'. Cleaned 6 1/4" hole from 1315' to 2930'. Tagged plug at 2930'. Left 852' of 7" casing in the hole from 1315' to 2167'. Cut remaining 7" casing at the following depths; 1964', 1768' and 1564'. Left 148' of 8 5/8" casing in the hole from 626' to 774'. Left 20' of 16" conductor pipe in the hole from 20' to surface. Cleaned 7 7/8 hole through Pittsburgh Coal 1055' to 1062'. Cemented hole from 2930' to surface as follows: Cemented hole from 2930' to 1262' with Expandable Cement. Cemented hole from 1262' to 955' with 155 sacks of Thixotropic Cement with green dye. Cemented hole from 955' back to surface with Expandable Cement. A total of 750 sacks of cement were used to fill the hole from 2930' to surface. Cement did circulate at the surface.	16" Casing 8 5/8" Casing 7" Casing	0' 0' 1315'	20' 148' 852'	
Coal Seams		Description of Monument		
Pittsburgh	(1055' to 1062')	77" of 7" casing w/ company name, well number, permit number and date stated on 7" casing.		
		Well marker will be attached to cement plug at ground level.		

... and that the work of plugging and filling said well was completed on the 5th day of October, 2010

And further deponents saith not.

David Harman
David Harman


Kevin S. Wright
Kevin S. Wright

Sworn to and subscribed before me this 15th day of December, 2011

Jacqueline L. Shriver
Notary Public

My commission expires:

March 18, 2020

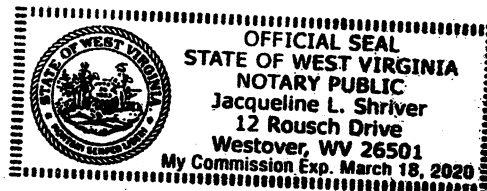

Permit No. 47-051-01512-P
Well No. M-1332